



# EV0line®



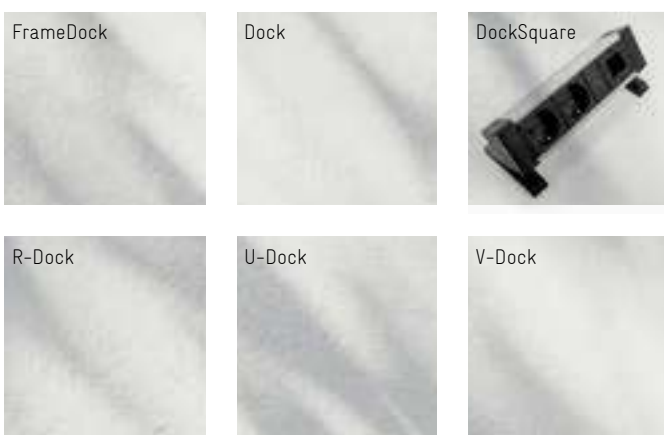

Circle80 Family	8
BackFlip	20
One	24
Square80	38
Port	42
FlipTop Push	48
FrameDock	54
Dock	58

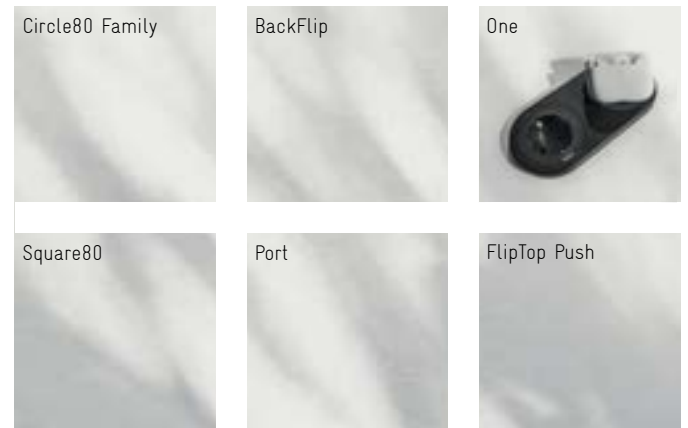

DockSquare	62
R-Dock	66
U-Dock	70
V-Dock	74
Up	78
Vertical	82
Express	86
APSA 6000	102

APSA 7000	108
Wireless Charger	114
Plug	118
Steckdosen / Sockets	122
Netzanschlussmodule / Power supply modules	134
USB Netzteile / USB power supplies	140



Datenmodule / Data modules	144
Wechselmodule / Interchangeable modules	160
SmartDrawers	170
CableManagement	176
Zubehör / Accessories	186



### **Innovative and energy efficient since 1973**

As early as 1973, our headquarters were ahead of its time in terms of building technology. For instance, climate-neutral heating of the first building was possible because waste heat from the plastic injection moulding machinery was used for the underfloor heating. We also save energy by using a geothermal installation. This progressive concept was repeated when the company was extended in 2019. The new building in Altena-Rosmart doesn't just improve our company's sustainable concept but also boosts the long-term viability of Lüdenscheid as a base.

**10 Deep drillings** of 100 m each for energy utilisation.

### **Floor and ceiling heating**


Through thermal, water-activated floor panels on the entire production and storage area; fed by energy recovery, among other things.

### **Calculated result - Rosmart**

We already generate about 25 % of the total energy ourselves today.



# EVoline® Made in Germany

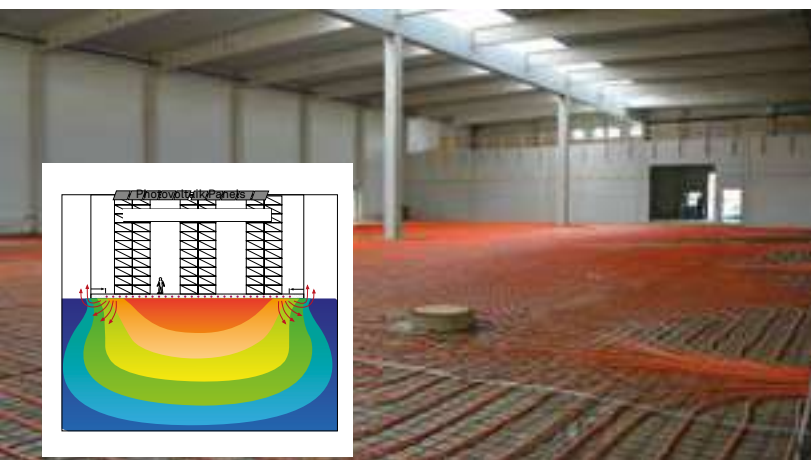


Take a look at how with us „100 years of electrical engineering“ have been replaced.

Schulte Elektrotechnik is a pioneer of innovative building infrastructure under the keyword: „decentralised electrical distribution“.



**We look forward to your visit!**







*EVOLine products freely configurable according to your wishes.*




*Various finish options*



*Options for wireless charging*



*International socket configurations*



*Different mounting installations*




*USB-Charger*




*Optional Accessories available*



*Variable profile lengths*



*Range of Data & Multimedia Modules*



*Interchangeable Modules*



*All dimensions are in millimetres.*







# EVoline® Circle80 Family

## EVoline Circle80

### The three-in-one solution

The EVoline Circle80 contains a single power socket, Type A+C USB Charger and cable outlet all in one unit. Optional inserts also available as alternative to cable outlet for additional connectivity.

## EVoline Circle80 Access

### More module options

The Circle80 Access cable outlet with locking clip. Also configurable with up to two inserts from the Circle80 range.



## Available colours



Black

White

Stainless steel look









# EVoline® Circle80 Family

EVoline Circle80 / EVoline Circle80 Access

**Quick and easy desk cable management.**

The practical cable outlet with integrated slider for locking the cable makes excess cable disappear elegantly from the table. The low installation depth and the EVoline fastening system guarantee simple and fast assembly on top.

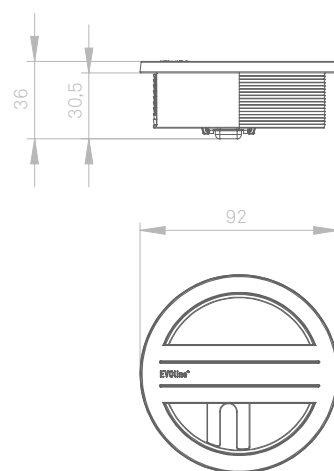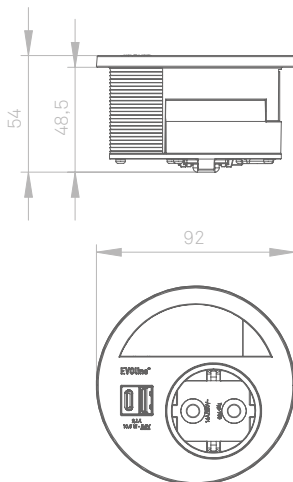





# EVoline® Circle80 Family



### EVoline Circle80 Hide **Elegantly covered**

The practical Circle80 Hide rotating cover elegantly conceals the connections of the Circle80 or Circle80 Access. The cover plate is simply installed in the upper section and can be replaced or retrofitted.

### EVoline Circle80 DisQ **Inductive wireless charger**

The rotating cover of the Circle80 DisQ contains an integrated 15W wireless induction charger. The wireless charging function can be used when cover is open or closed; allowing full use of socket and USB chargers. Compatible mobile device required for wireless charging.







### Available colours



Black

White

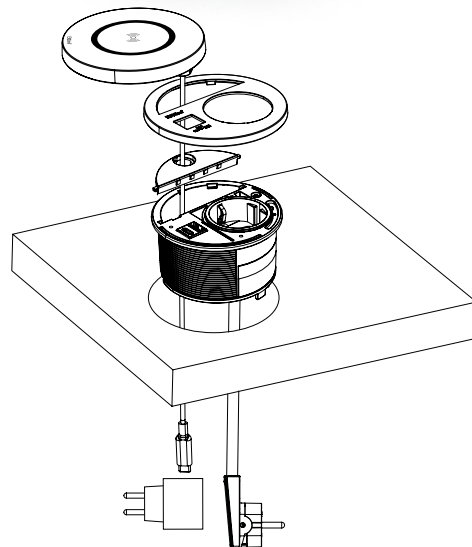

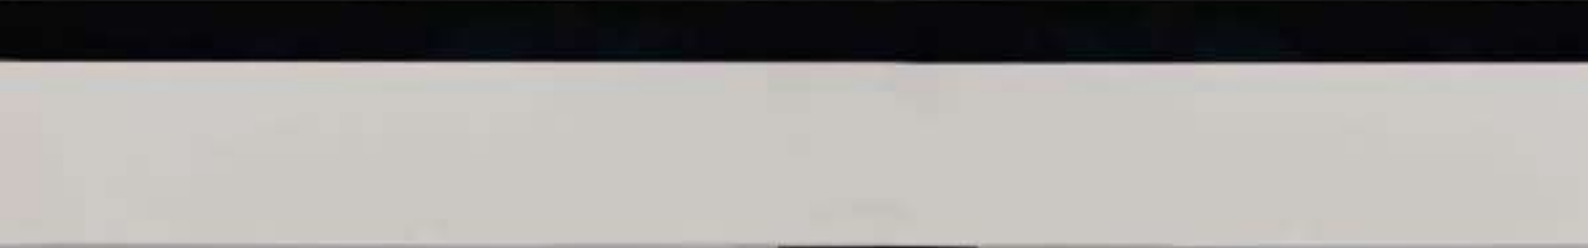



# EVoline® Circle80 Family

*EVoline Circle80 MonitorPlate*  
**The connection between Circle80 and monitor**  
 The MonitorPlate is an add-on module for the award-winning EVoline Circle80. It creates an optical connection between the Circle80 and the monitor arm.




Available colours





Black



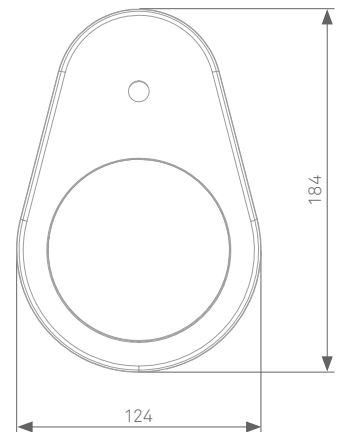








White



Description	Picture	Specifications	Order Number
<p><b>EVoline Circle80</b></p> <p>Type 927-3            1 x VDE-socket, 16 A,            with contact-protection            1 x USB charger type A+ C            5 V / 2,1 A max.            fixed power cable 3 m            with protective contact angle plug.</p>		<p>black 1592 7300 7700</p> <p>white 1592 7300 7400</p> <p>stainless steel effect cover 1592 7301 3700</p>	
<p><b>EVoline Circle80 Access</b></p> <p>Type 927-3            Cable outlet with 2 openings for            different cover plates.            With fixing slide, to prevent the            cables from slipping through.</p>		<p>black 1592 7301 4600</p> <p>white 1592 7301 4700</p>	




Description	Picture	Specifications	Order Number
<b>EVoline cover plate for Circle80</b>		completely closed	
		black	1599 0911 8800
	white	1599 0911 8900	
		with 6 cable outlets (each 2 x 4, 7 und 9 mm)	
black		1599 0911 8600	
white	1599 0911 8700		
<b>EVoline cover plate with multimedia applications for Circle80</b>  With 3 cable outlets (2 x 4 mm, 1 x 9 mm)		RJ45 Cat. 6 shielded socket - socket, without cable	
		black	1599 0911 9200
	white	1599 0911 9300	
		RJ45 Cat. 6A shielded socket - socket, without cable	
		black	1599 0912 3300
	white	1599 0912 3400	
		USB 3.0 socket - socket, without cable	
		black	1599 0911 9600
	white	1599 0911 9700	
		HDMI 2.0 socket - socket, without cable	
		black	1599 0912 4200
	white	1599 0912 4300	
		USB-C 3.1 socket with 1 m cable and USB-C plug (Power: 5 A / max. 100 watts data: up to 10 Gbit / s)	
		black	1599 0913 0300
white	1599 0913 0400		

Description	Picture	Specifications	Order Number
<p><b>EVOLine Circle80 DisQ</b></p> <p>Rotating cover with integrated wireless induction charger. Power: 15 watts With cover plate, suitable for Circle80 and Circle80 Access.</p> <p>Separate power supply with USB-C connection is required!</p>		<p><b>without power supply:</b></p> <p>black 1599 0912 9900</p> <p>white 1599 0913 0000</p> <p><b>with USB C power supply 20 W</b></p> <p>black 1599 0913 1400</p> <p>white 1599 0913 1500</p>	
<p><b>EVOLine Circle80 Hide</b></p> <p>Rotating cover with cover plate, suitable for Circle80 and Circle80 Access.</p>		<p>black 1599 0912 9600</p> <p>white 1599 0912 9700</p>	



## Wireless charging

- inductive coupling between transmitter (charging station) and receiver (mobile phone)
- vendor independent, charges devices with inductive charging function (the unit must be placed centrally and flat over the coil).
- transmitter coil is active only when a connection to the receiving device is made
- Please note: The charging function may be impaired by covers or protruding housing parts (e.g. cameras).

Description	Picture	Specifications	Order Number
<p><b>EVoline Circle80 Monitor plate</b></p> <p>Complementary module for EVoline Circle80 and Circle80 Access, for connection to a monitor stand.</p>		<p>black</p> <p>white</p>	<p>9332 5760 0000</p> <p>9332 5770 0000</p>





reddot design award  
winner 2015



# EVoline® BackFlip



## EVoline BackFlip

### High quality design and Ingenious function

The EVoline BackFlip is available in a range of premium finish, making it the perfect solution for providing power to any kitchen. The cover when closed provides additional protection from liquid ingress and when gently pressed, it rotates 180 degrees, revealing two socket and a USB charger. The shallow unit depth of just 53mm increases the number of places within the kitchen it can be installed.


Flush mounted  
installation  
possible.



Available  
surfaces



Stainless steel  
brushed



Ceramic  
concrete look



Glass matt white  
(similar RAL 9003)



Stainless steel matt  
white lacquered  
(similar RAL 9010)



Metalcoated  
brass look





Glass matt black  
(similar RAL 9005)



Glass glossy black  
(similar RAL 9005)



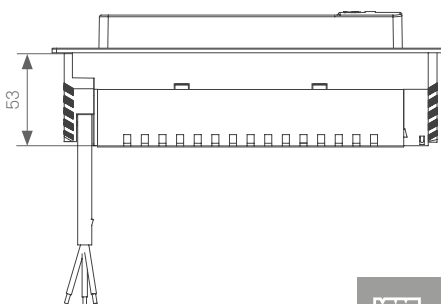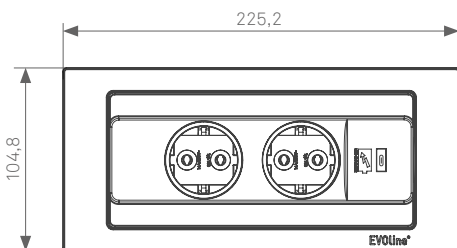

Stainless steel matt  
black lacquered  
(similar RAL 9005)



Quick assembly in panels of  
10 - 40 mm in thickness.



Description	Picture	Specifications	Order Number
<b>EVOLine BackFlip</b>  2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type C charger, 5V / 2.1A Fixed power supply cable 3.0 m with angled plug.		Cover Brushed stainless steel	1592 7101 6100
		Cover Glass, frosted white	1592 7101 6200
		Cover Glass, glossy black	1592 7101 6300
		Cover Glass, matt black	1592 7102 5700
		Cover matt white lacquered	1592 7101 6400
		Cover matt black lacquered	1592 7101 6500
		Cover Stainless steel, brass look	1592 7101 7700
<b>EVOLine BackFlip CUISINE</b>  2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1× USB Type C charger, 5V / 2.1A, Fixed power supply cable 2.5 m plug supplied unattached		Cover Brushed stainless steel	1592 7101 4600
		Cover Glass, frosted white	1592 7101 5500
		Cover Glass, glossy black	1592 7101 4800
		Cover Glass, matt black	1592 7102 5800
		Cover matt white lacquered	1592 7101 5600
		Cover matt black lacquered	1592 7101 4700
		Cover Stainless steel, brass look	1592 7101 7600









# EVoline® One

## EVoline One

### Compact and Accessible Power, Data/Multimedia

The round single socket outlet can be installed horizontally or vertically. The flexible cable entry guarantees a minimum installation depth of 50 mm. The One offers a wide selection of module inserts, rings and covers to choose from.




## EVoline One Lock

### Protection against unwanted removal in public areas

The One Lock can only be opened with a special unlocking tool. Visually, the One Lock differs only by a printed lock symbol and an additional built-in magnet.


## Available surfaces with/without cover



## Black

## Black/Stainless steel

## Black



## White

## White/Stainless steel

## White/Brass effect







Lift - 12 mm



SlimFit - 10 mm

One spacer sleeves Lift and SlimFit

### Installation in shallow materials

The two spacer sleeves Lift and SlimFit enable the One to be installed in very thin wall thicknesses from 1 mm. One or both sleeves are simply slid over the One as required during installation to achieve an additional 12 mm in front of and/or 10 mm behind the panel.


One Polsterhülle und One Klemmstück

### Upholstered Furniture installation

The upholstery sleeve can be used in furniture with different fabrics and thickness of padding and base structures. The fabric is held in place between the sleeve and One unit, ensuring both remain fixed over time. Short or Long wing clamps can also be specified to accommodate different combined thicknesses.





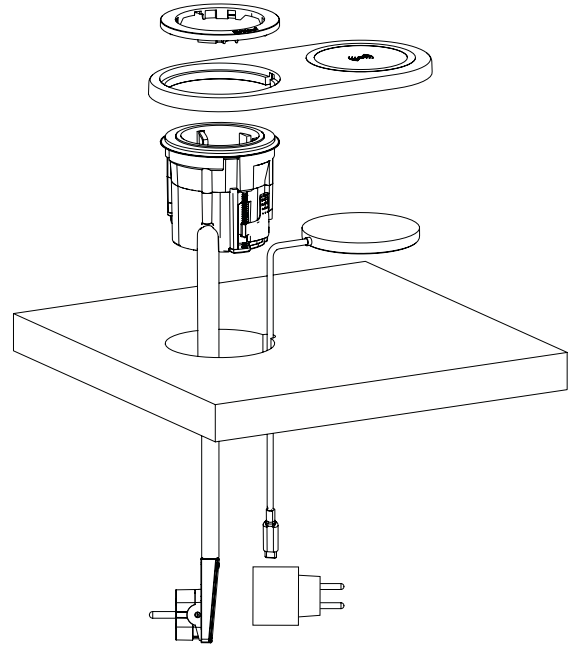

### EVoline One DisQ

#### Wireless Charging Add-on

The One DisQ is a module extension providing the much-sought option to add 'Wireless Charging' of compatible smartphones to installed One units. Easy to retrofit, it simply requires a small adjustment to upgrade whilst keeping the existing One installation. Power, USB Charger, Data or Multimedia sockets of the One remain free to use during Wireless Charging and can even be used simultaneously!




### Available colours





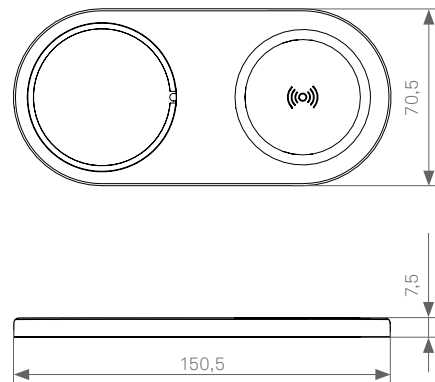


Black

White


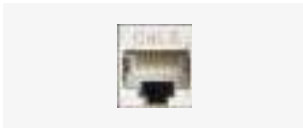
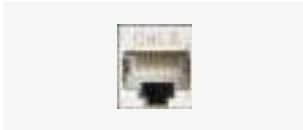
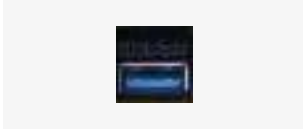
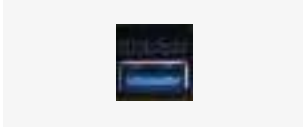
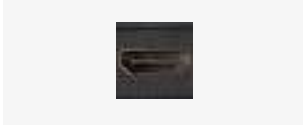
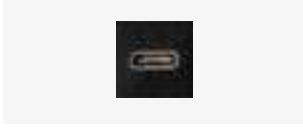









Description	Picture	Specifications	Order Number
<p><b>EVOLine One with VDE-socket</b></p> <p>Housing made of plastic Clamping wing made of metal</p>		<p>Housing color: black Ring color: black</p>	1592 8000 0900
<p>VDE-socket, 16 A with contact-protection fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: black Ring color: black with stainless steel inlay</p>	1592 8000 1100
<p>VDE-socket, 16 A with contact-protection fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: white Ring color: white</p>	1592 8000 4300
<p>VDE-socket, 16 A with contact-protection fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: white Ring color: white with stainless steel inlay</p>	1592 8000 6100
<p><b>EVOLine One with VDE-socket and lid</b></p> <p>Housing and lid made of plastic Clamping wing made of metal</p>		<p>Housing color: black Lid color: black</p>	1592 8000 4100
<p>VDE-socket, 16 A with contact-protection fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: black Lid color: black with stainless steel inlay</p>	1592 8000 3900
<p>VDE-socket, 16 A with contact-protection fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: white Lid color: white</p>	1592 8000 4200
<p>VDE-socket, 16 A with contact-protection fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: white Lid color: white with stainless steel inlay</p>	1592 8000 6200


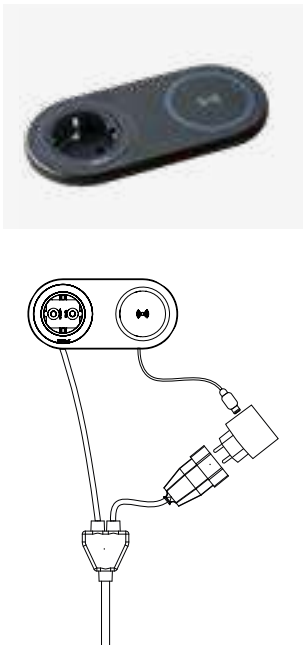
Description	Picture	Specifications	Order Number
<p><b>EVoline One with double USB Charger</b></p> <p>Housing made of plastic Clamping wing made of metal</p>		<p>Housing color: black Ring color: black</p>	<p>1592 8001 4800</p>
<p>USB charger type A + C 5 V / 2,1 A max. fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: black Ring color: black with stainless steel inlay</p>	<p>1592 8001 4900</p>
<p>USB charger type A + C 5 V / 2,1 A max. fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: white Ring color: white</p>	<p>1592 8001 6900</p>
<p>USB charger type A + C 5 V / 2,1 A max. fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: white Ring color: white with stainless steel inlay</p>	<p>1592 8001 9300</p>
<p><b>EVoline One with double USB Charger and lid</b></p> <p>Housing and lid made of plastic Clamping wing made of metal</p>		<p>Housing color: black Lid color: black</p>	<p>1592 8001 9000</p>
<p>USB charger type A + C 5 V / 2,1 A max. fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: black Lid color: black with stainless steel inlay</p>	<p>1592 8001 8900</p>
<p>USB charger type A + C 5 V / 2,1 A max. fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: white Lid color: white</p>	<p>1592 8001 9100</p>
<p>USB charger type A + C 5 V / 2,1 A max. fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: white Lid color: white with stainless steel inlay</p>	<p>1592 8001 9400</p>



Description	Picture	Specifications	Order Number
<p><b>Configurable Basic Housing EVOLine One</b></p> <p>Housing made of plastic Clamping wing made of metal</p> <p><u>Please specify when ordering:</u> Clamping wing: Clamping range 9 mm to ∞ mm</p> <p>When using an EVOLine upholstery sleeve: Clamping wing: Clamping range 9 mm to 25 mm Clamping wing short: Clamping range 21 mm to 38 mm</p>		<p><b>Housing</b></p> <p>black</p> <p>white</p>	<p>9332 3280 0000</p> <p>9332 3290 0000</p>
<p><b>Ring for EVOLine One</b></p>		<p>black or white, with inlay in stainless steel or brass look</p> <p>Please indicate the ring and inlay colour when ordering</p>	<p>9332 3520 0000</p>
<p><b>Ring for EVOLine One</b></p>		<p>black or white</p> <p>Please indicate the colour when ordering</p>	<p>9332 3510 0000</p>
<p><b>Ring with cover for EVOLine One</b></p>		<p>black or white, with inlay in stainless steel or brass look</p> <p>Please indicate the ring and inlay colour when ordering</p>	<p>9332 3560 0000</p>
<p><b>Ring with cover for EVOLine One</b></p>		<p>black or white</p> <p>Please indicate the colour when ordering</p>	<p>9332 3550 0000</p>



Description	Picture	Specifications	Order Number
<p><b>Configurable Basic Housing EVOLine One with 2 module openings</b></p>		<b>Housing</b>	
<p>Housing made of plastic Clamping wing made of metal</p>		black	9332 3590 0000
<p><u>Please specify when ordering:</u> Clamping wing: Clamping range 9 mm to ∞ mm</p>		white	9332 3600 0000
<p>When using an EVOLine upholstery sleeve: Clamping wing: Clamping range 9 mm to 25 mm Clamping wing short: Clamping range 21 mm to 38 mm</p>		<b>Module</b>	
		RJ45 Cat. 6 shielded socket - socket, without cable	9331 8090 0000
		RJ45 Cat. 6A shielded socket - socket, without cable	9331 8290 0000
		USB 3.0 socket - socket, without cable	9331 8530 0000
		USB 3.0 socket - plug, 0.5 m cable	9332 5680 0000
		HDMI 2.0 socket - socket, without cable	9332 5480 0000
		USB-C 3.1 socket with 1 m cable and USB-C plug (Power: 5 A / max. 100 watts Data: up to 10 Gbit/s)	9332 6370 0000
		Cover for module opening	9332 5080 0000

Description	Picture	Specifications	Order Number
<p><b>Configurable Basic Housing EVoline One Lock</b></p> <p>With One Lock Secure. Housing made of plastic Clamping wing made of metal</p> <p><u>Please specify when ordering:</u> Clamping wing: Clamping range 9 mm to ∞ mm</p> <p>When using an EVoline upholstery sleeve: Clamping wing: Clamping range 9 mm to 25 mm Clamping wing short: Clamping range 21 mm to 38 mm</p>		<p><b>Housing</b></p> <p>black, for electricity</p> <p>black, for data</p> <p>white, for electricity</p> <p>white, for data</p>	<p>9332 3280 1000</p> <p>9332 3590 1000</p> <p>9332 3290 1000</p> <p>9332 3600 1000</p>
<p><b>Ring for EVoline One Lock</b></p> <p>With One Lock Secure.</p>		<p>black or white, with inlay in stainless steel or brass look</p> <p>Please indicate the ring and inlay colour when ordering</p>	<p>9332 3520 1000</p>
<p><b>Ring with cover for EVoline One Lock</b></p> <p>With One Lock Secure.</p>		<p>black or white</p> <p>Please indicate the colour when ordering</p>	<p>9332 3510 1000</p>
<p><b>Ring with cover for EVoline One Lock</b></p> <p>With One Lock Secure.</p>		<p>black or white, with inlay in stainless steel or brass look</p> <p>Please indicate the ring and inlay colour when ordering</p>	<p>9332 3560 1000</p>
<p><b>Ring with cover for EVoline One Lock</b></p> <p>With One Lock Secure.</p>		<p>black or white</p> <p>Please indicate the colour when ordering</p>	<p>9332 3550 1000</p>
<p><b>Unlocking device for EVoline One Lock rings</b></p>			<p>1599 0928 9700</p>

Description	Picture	Specifications	Order Number
<p><b>EVoline One DisQ</b></p> <p>Extension module for EVoline One incl. EVoline DisQ with wireless charging function.</p> <p>Output power: max 15W Supports magnetic attachment for compatible devices. 1.5 m connection cable with USB-C plug.</p> <p>Colour: black or white</p> <p>Power supply unit (minimum: DC 5 V/3 A, DC 9 V/2 A) required.</p>		<p><b>without power supply unit</b></p> <p>black</p> <p>white</p> <p><b>incl. 20 W power supply unit</b></p> <p>black</p> <p>white</p>	<p>9332 8040 0000</p> <p>9332 8050 0000</p> <p>9332 8380 0000</p> <p>9332 8390 0000</p>
<p><b>EVoline One DisQ Set</b></p> <p>Consisting of</p> <p>EVoline One; type 928 3.0 m mains connection cable black with wire end ferrules and branch with Euro flat coupling, VDE plug enclosed loose</p> <p>EVoline One DisQ, type 928; black, 15 W, cable 1.5 m with USB-C plug</p> <p>1x 20 W power supply unit with Euro plug with USB-C and USB-A socket, black</p>		<p>VDE socket outlet, 16A, black, with contact protection and black ring</p> <p>VDE socket outlet, 16A, black, with contact protection and black ring with cover</p> <p>Double USB charger 2.1 A, type A + C with black ring</p> <p>Double USB charger 2.1 A, type A + C with black ring with cover</p>	<p>1592 8003 0000</p> <p>1592 8003 2600</p> <p>1592 8003 0100</p> <p>1592 8003 2700</p>

Description	Picture	Specifications	Order Number
<p><b>EVOLine One distance sleeves set</b></p> <p>Consisting of 2 sleeves for mounting the One in very thin walls from 1 mm. Colour: black</p> <p>Lift sleeve: for front installation by 12 mm</p> <p>SlimFit sleeve: for substructure by 10 mm</p>			9332 6300 0000
<p><b>EVOLine upholstery sleeve</b></p> <p>Additional fixing sleeve for installation in an upholstered piece of furniture</p>		<p>Flat upholstery sleeve (Upholstery thickness of up to 5,5 mm max.)</p> <p>High upholstery sleeve (Upholstery thickness of up to 11 mm max.)</p>	<p>9332 3490 0000</p> <p>9332 3500 0000</p>







DESIGN  
AWARD  
2015



GERMAN  
DESIGN  
AWARD  
NOMINEE  
2016

# EVoline® Square80

EVoline Square80

## Compact Power & Data System

The EVoline Square80 comprises of a single power socket, USB charger optional 3rd outlet. The sliding cover of the Square80 can also be supplied with built in Wireless charger, which can be used in both open and closed position. Compatible mobile device needed for the wireless charging.



Patented rapid fastener.

Available colours





Black





White

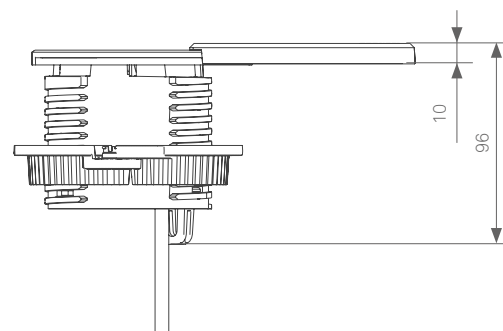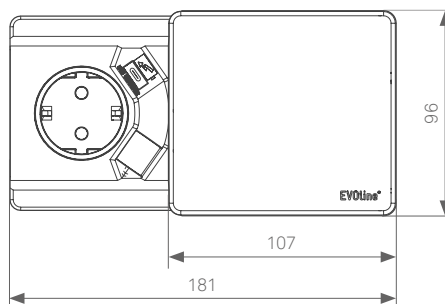

Stainless steel look



Description	Picture	Specifications	Order Number
<b>EVOLine Square80</b>  1x VDE-socket, 16 A, contact protected 1x USB Charger Type C, 5 V / 2,1 A Fixed supply cable 3 m with angled plug.		Cover and housing black	1592 7002 4000
		Cover and housing white	1592 7002 4100
		Cover in stainless steel optics housing in black	1592 7002 4200
<b>EVOLine Square80 with Wireless Charger</b>  1x VDE-socket, 16 A, contact protected 1x USB Charger Type C, 5 V / 2,1 A 1x Wireless Charger Fixed supply cable 3 m with angled plug.		Cover and housing black	1592 7002 4600
		Cover and housing white	1592 7002 4700
		Cover in stainless steel optics housing in black	1592 7002 4800

### Wireless charging

- inductive coupling between transmitter (charging station) and receiver (mobile phone)
- vendor independent, charges devices with inductive charging function (the unit must be placed centrally and flat over the coil).
- transmitter coil is active only when a connection to the receiving device is made
- Please note: The charging function may be impaired by covers or protruding housing parts (e.g. cameras).











red dot  
design award

# EVoline® Port



EVoline Port

### Fully retractable – Circular power unit

Installed into a 102 mm diameter hole, the EVoline Port can be hidden within a central table column. Plug in your devices, and retract the unit into the table with cables exiting the unit via our patented rocking cover. Available in a range of stylish cover and profile finishes.

Profile colours



Silver coloured  
anodised



Black anodised



Antique brass  
coloured anodised

LED Nightlight



Ruby red



Emerald green



Night blue



Soft white

Cover surfaces



Plastic silver  
coloured lacquered  
(similar RAL 9006)



Plastic  
white lacquered  
(similar RAL 9003)



Plastic  
black lacquered  
(similar RAL 9005)




Stainless steel  
solid







Anodised aluminium  
(similar RAL 9005)

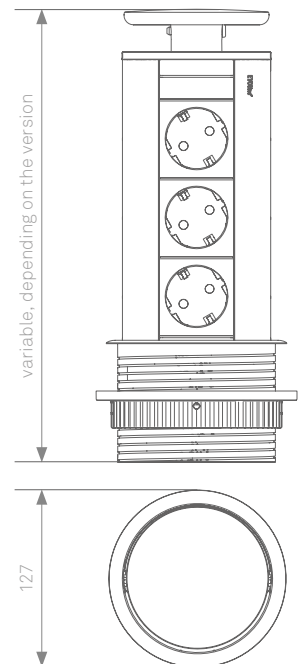


Plastic  
brass coloured  
lacquered



Description	Picture	Specifications	Order Number
<p><b>EVOLine Port</b></p> <p>Aluminium housing, silver anodised.</p> <p>2× sockets, VDE-compliant, 60°, 16 A contact-protected</p> <p>Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	1593 1000 3300
		<p>Rocking cover and collar made of black lacquered plastic</p>	1593 1000 5200
		<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>	1593 1003 1100
		<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics.</p> <p>Blue NIGHTLIGHT effect</p>	1593 1003 1200
<p><b>EVOLine Port</b></p> <p>Aluminium housing, silver anodised.</p> <p>3× sockets, VDE-compliant 60°, 16 A, contact-protected</p> <p>Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	1593 1000 0100
		<p>Rocking cover and collar made of black lacquered plastic</p>	1593 1000 5000
		<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>	1593 1002 1600
		<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics.</p> <p>Blue NIGHTLIGHT effect</p>	1593 1003 1300

Description	Picture	Specifications	Order Number
<p><b>EVOLine Port Cuisine</b></p> <p>Aluminium housing, silver anodised.</p> <p>3× sockets, VDE-compliant, 60°, 16 A contact-protected</p> <p>Fixed supply cable 2.5 m with wire end ferrules</p> <p>Plug supplied unattached.</p>		<p>Rocking cover made of silver lacquered plastic, Collar made of grey plastic</p>	<p>1593 1000 0600</p>
<p><b>EVOLine Port DATA</b></p> <p>Aluminium housing, silver anodised.</p> <p>2× sockets, VDE-compliant, 60°, 16 A contact-protected</p> <p>Fixed supply cable 3.0 m with angled plug.</p> <p>2× modular couplings RJ45 to RJ45 CAT 6 shielded, 1:1 interconnected.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. Blue NIGHTLIGHT effect</p>	<p>1593 1003 1400</p> <p>1593 1003 1500</p> <p>1593 1003 1600</p> <p>1593 1003 1700</p>

Description	Picture	Specifications	Order Number
<p><b>EVOLine Port DATA</b></p> <p>Aluminium housing, silver anodised.</p> <p>3× sockets, VDE-compliant, 60°, 16 A contact-protected.</p> <p>2× Cat. 6 modular couplings</p> <p>Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. Blue NIGHTLIGHT effect</p>	<p>1593 1003 1800</p> <p>1593 1003 1900</p> <p>1593 1003 2000</p> <p>1593 1003 2100</p>

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**K** Configure your individual EVoline Port.  
See page 6 - 7 for instructions

**Configurable Basic Housing  
EVoline Port**

Aluminium housing  
silver anodised.

Mounting hole ø 102 mm.



Rocking cover and collar  
made of silver lacquered  
plastic

9330 1830 0000

Rocking cover made of  
solid stainless steel in CD  
design, collar made of pla-  
stic, lacquered in stainless  
steel optics

9330 1360 0000

**Configurable Basic Housing  
EVoline Port CLASSIC**

Aluminium housing  
plated in antique brass colour.

Mounting hole ø 102 mm



Rocking cover and collar  
made of antique brass  
colored anodized

9330 2710 0000

**Configurable Basic Housing  
EVoline Port  
BLACK**

Aluminium housing  
black anodised.

Mounting hole ø 102 mm.



Rocking cover and collar  
made of black lacquered  
plastic

9330 5560 0000

Rocking cover made of  
aluminium, black anodised,  
collar made of black lac-  
quered plastic

9332 7180 0000

**Nightlight LED Modul  
for EVoline Port**

LEDs underneath rocking cover



Light colour: night blue

9330 3830 0000

Light colour: ruby red

9330 3840 0000

Light colour: emerald green

9330 5790 0000

Light colour: soft white

9331 0260 0000







EVOLine FlipTop Push

**Organised cables above and below**

The EVOLine FlipTop Push is an elegant in-desk solution for boardroom, conference and meeting tables alike. With a "soft touch" opening mechanism, this modular system can be manufactured with various combinations power, USB Chargers and wide range of data/multimedia sockets (fitted within interchangeable plates). When in use, the cover can be closed as device cables exit the unit via a brush strip at the front.



Flush mounted installation possible.



Practical cable routing ensures tidiness under the desk.



Adapter clip for secure WireLane connection.

Available surfaces



Stainless steel brushed





Steel matt black powder-coated (similar RAL 9005)



Steel matt white powder-coated (similar RAL 9003)





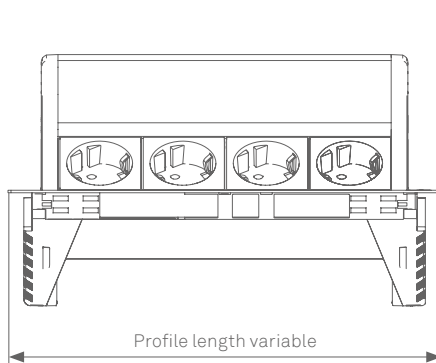


Steel matt grey powder-coated (similar RAL 9006)



Fast mounting in panels up to 50 mm in thickness.



# EVOLine® FlipTop Push

Description	Picture	Specifications	Order Number
<p><b>EVOLine FlipTop Push S</b></p> <p>3× sockets, VDE-compliant 60°, 16 A, contact-protected Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 195 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7002 4900
<p><b>EVOLine FlipTop Push Data S</b></p> <p>2× sockets, VDE-compliant, 60°, 16 A, contact-protected. 2× Cat.6 modular couplings, shielded Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 195 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7002 8100
<p><b>EVOLine FlipTop Push M</b></p> <p>4× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 245 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7000 2700
<p><b>EVOLine FlipTop Push M</b></p> <p>2× sockets, VDE-compliant, 60°, 16 A, contact-protected. 2× installation space for interchangeable modules Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 245 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7010 1400
<p><b>EVOLine FlipTop Push Data M</b></p> <p>3× sockets, VDE-compliant, 60°, 16 A, contact-protected. 2× Cat.6 modular couplings, shielded Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 245 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7000 0200

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**K** Configure your individual EVoline FlipTop *Push*.  
See page 6 - 7 for instructions.

**Configurable Basic Housing  
EVoline FlipTop Push S**

For 3 modules  
Housing made of black anodised aluminium,  
Installation dimensions: 157 × 195 mm



Cover	brushed stainless steel	9331 8010 0000
	black powder-coated	9331 9360 0000
	white powder-coated	9331 9630 0000
	grey powder-coated	9331 9670 0000

**Configurable Basic Housing  
EVoline FlipTop Push M**

For 4 modules  
Housing made of black anodised aluminium,  
Incl. WireLane Adaptor  
Installation dimensions: 157 × 245 mm



Cover	brushed stainless steel	9331 8020 0000
	black powder-coated	9331 9370 0000
	white powder-coated	9331 9640 0000
	grey powder-coated	9331 9680 0000

**Configurable Basic Housing  
EVoline FlipTop Push L**

For 5 modules  
Housing made of black anodised aluminium,  
Incl. WireLane Adaptor  
Installation dimensions: 157 × 295 mm



Cover	brushed stainless steel	9331 8030 0000
	black powder-coated	9331 9380 0000
	white powder-coated	9331 9650 0000
	grey powder-coated	9331 9690 0000

**Configurable Basic Housing  
EVoline FlipTop Push XL**

For 6 Modules  
Housing made of black anodised aluminium,  
Incl. WireLane Adaptor  
Installation dimensions: 157 × 345 mm





Cover	brushed stainless steel	9331 8040 0000
	black powder-coated	9331 9390 0000
	white powder-coated	9331 9660 0000
	grey powder-coated	9331 9700 0000

**Configurable Basic Housing  
EVoline FlipTop Push white**

For 3-6 Modules  
Housing made of white powder-coated aluminium,  
cover white powder-coated,  
Incl. WireLane Adaptor



S		9332 3980 0000
M		9332 3990 0000
L		9332 4000 0000
XL		9332 4010 0000

Description	Picture	Specifications	Order Number
<p><b>EVOLine WireLane Adaptor</b></p> <p>To connect WireLane to FlipTop Push.</p>			1599 0910 3300
<p><b>EVOLine FlipTop Push TRAY</b></p> <p>black powder-coated. For protection and cover below the table. Also applicable as cable tray.</p>		<p>for FlipTop Push S</p> <p>for FlipTop Push M</p> <p>for FlipTop Push L</p> <p>for FlipTop Push XL</p>	<p>1599 0910 8600</p> <p>1599 0910 8700</p> <p>1599 0910 8800</p> <p>1599 0910 8900</p>





# EVoline® FrameDock

EVoline FrameDock

## In-Desk modular power

The EVoline FrameDock is a compact and smart system, with timeless design. Thanks to its shallow installation depth and simple mounting, the FrameDock can be installed anywhere. The FrameDock Hide protects the sockets from dust and dirt and covers them elegantly.

Available surfaces




Silver / black




Black



White

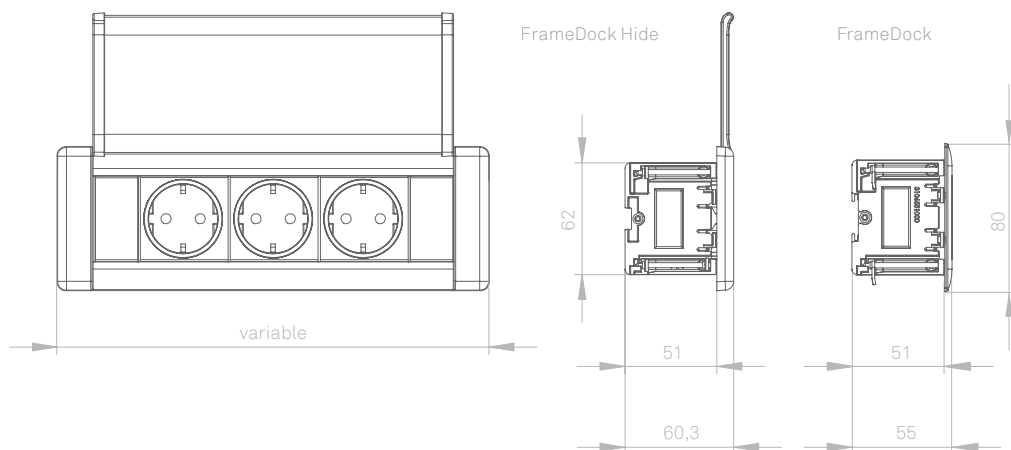


**Examples of power supply options:**

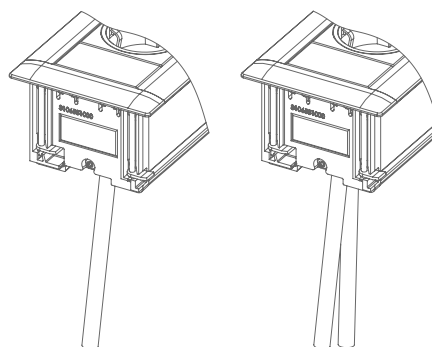


*Fixed power supply cable through the bottom of the profile.*

*Available with several country specific plugs, with wire end ferrules, connector powered by GST18 or WAGO WINSTA.*

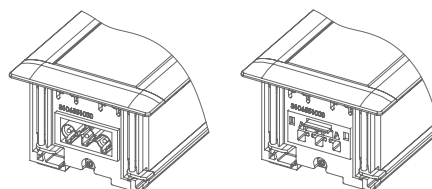

*End cap with power input or output connector, depending on the surface thickness (max. 18 mm)*

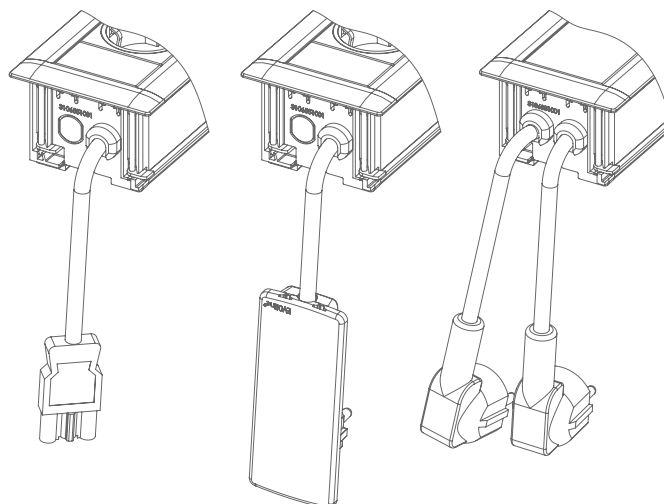

*End cap with fixed power supply cable, depending on the surface thickness (max. 18 mm)*

*Available with several country specific plugs, EVOLine Plug, wire end ferrules, connector powered by GST18 or WAGO WINSTA.*



Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------



**Configure your individual EVoline FrameDock.**

See page 6 - 7 for instructions

**Configurable Basic Housing  
FrameDock**

Aluminium housing



Profile silver anodised  
Screw covers black plastic 9331 2180 0000

Profile black anodised  
Screw covers black plastic 9331 5330 0000

Profile white powder-coated  
Screw covers white plastic 9331 3540 0000

**Configurable Basic Housing  
FrameDock Hide**

Aluminium housing



Profile and lid silver anodised  
Screw covers black plastic 9332 5940 0000

Profile and lid black anodised  
Screw covers black plastic 9332 5960 0000

Profile and lid white powder-coated  
Screw covers white plastic 9332 5970 0000





*EVoline Dock*

**Proven for office and hotel**

The EVoline Dock easily accessible desk-top power for even the most demanding of environments. Configurable with power, USB Chargers and data/multimedia sockets, the EVoline Dock provides connectivity tailored to your needs.

Available colours



Silver



Black




White



Stainless steel look



Alanox

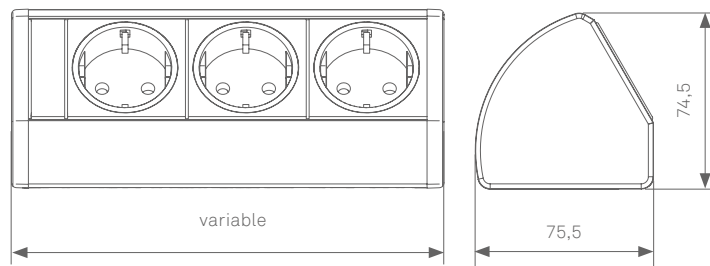


Mounting options for the EVoline Dock can be found on pg.

„EVoline® Dock Accessories“




## Examples of power supply options:

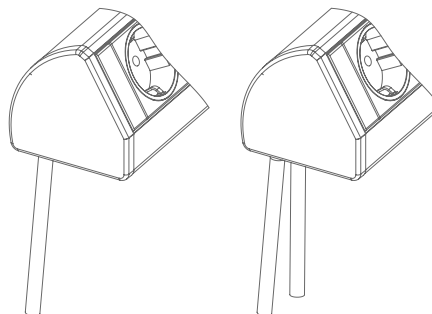

Fixed Power Supply Cable through the bottom of the profile


Available with several country specific plugs, with wire end ferrules, Wieland GST 18i3, or WAGO WINSTA Connector

Color of the end caps painted to match the profiles color.

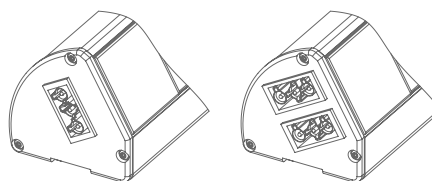

End cap with power input and/or output connector, depending on the surface thickness (max. 18 mm)

End cap colour: black

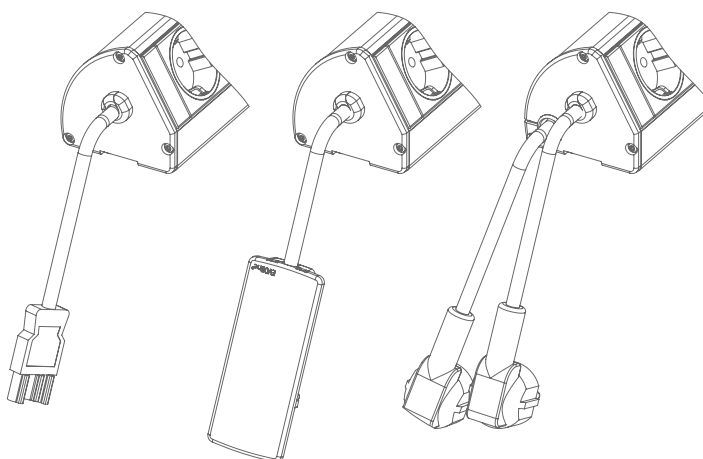

End cap with fixed power supply cable.

Available with several country specific plugs, EVOLine Plug, wire end ferrules, connector powered by GST18 or WAGO WINSTA.

Color of the end caps: black

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**K** **Configure your individual EVoline Dock.**  
See page 6 - 7 for instructions.

**Configurable Basic Housing  
EVoline Dock BLACK**

Aluminium housing  
Cable entry through end cap or profile.



Black anodised

9330 1811 0000

**Configurable Basic Housing  
EVoline Dock SILVER**

Aluminium housing  
Cable entry through end cap or profile.



Silver anodised

9330 1810 0000

**Configurable Basic Housing  
EVoline Dock STAINLESS**

Aluminium housing  
Cable entry through end cap or profile.



Stainless steel alike  
anodised (ALANOX®)

9330 8450 0000

**Configurable Basic Housing  
EVoline Dock WHITE**

Aluminium housing  
Cable entry through end cap or profile.



White powder-coated  
End caps plastic laquered  
to match  
(in case cable entry  
through the profile)

9331 3530 0000



# EVoline® DockSquare



EVoline Dock Square

## Securely fixed to any surface

The DockSquare combines compactness, variability and mobility at the workplace. With the various mounting options the DockSquare is always the right choice. The quick adhesive mounting facilitates assembly and can be easily moved without leaving a mark. If preferring a more permanent fixing, there are also various clamps and mounting brackets available.

## Fixing Options




## Available surfaces



Silver

Black

White

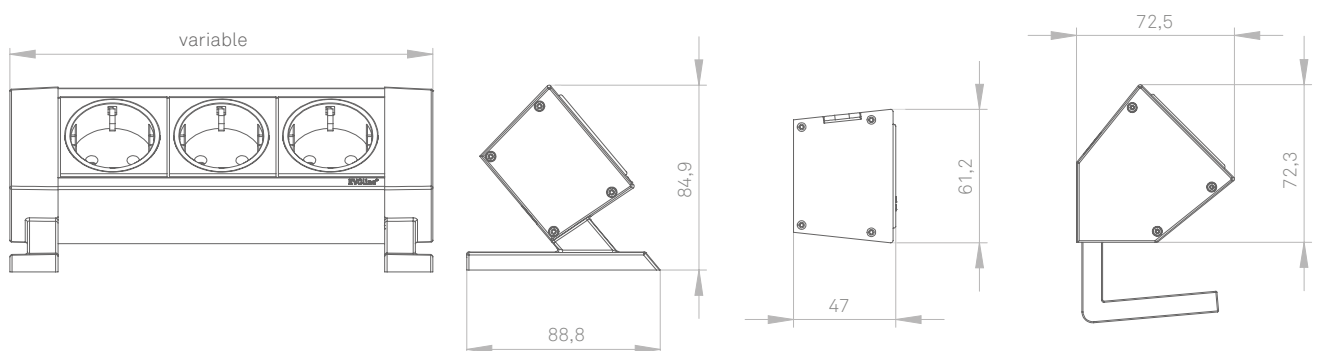

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

## **K** Configure your personal EVoline DockSquare.

See page 6 -7 for instructions.

### **Configurable Basic Housing EVoline DockSquare**

Aluminium housing



silver anodised	9332 0720 0000
black anodised	9332 0730 0000
white powder coated	9332 1170 0000

### **End caps with mounting feet for surface mounting**

End caps with mounting feet made of plastic

Double sided strips

pre-assembled - removable without residue



#### **with double sided strips:**

black, left	9332 7720 0000
black, right	9332 7730 0000
white, left	9332 7740 0000
white right	9332 7750 0000

#### **without double sided strips:**

black, left	9332 7680 0000
black, right	9332 7690 0000
white, left	9332 7700 0000
white right	9332 7710 0000

### **End caps with mounting feet and clamps for surface mounting**

End caps with mounting feet made of plastic

Metal clamp, black

For mounting from below

For optimum clamping effect, the clamps are simply pushed completely into the feet



#### **with knurled screw:**

(clamping range: 12 - 28 mm)

black, left	9332 7760 0000
black, right	9332 7770 0000
white, left	9332 7780 0000
white right	9332 7790 0000

#### **with hexagon socket:**

(clamping range: 17 - 28mm)


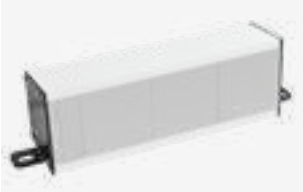


black, left	9332 7800 0000
black, right	9332 7810 0000
white, left	9332 7820 0000
white right	9332 7830 0000

#### **with hexagon socket:**

(clamping range: 25 mm)

black, left	9332 7840 0000
black, right	9332 7850 0000
white, left	9332 7860 0000
white right	9332 7870 0000



Description	Picture	Specifications	Order Number
<p><b>End caps with integrated clamps for surface mounting</b></p> <p>End caps made of black plastic with integrated aluminium clamps. Clamp integrated, top mounting with hexagon socket M4. clamping range: 8 mm - 20 mm and 20 mm - 40 mm.</p>		<p>black, left black, right  white, left white right</p>	<p>9332 7880 0000 9332 7890 0000  9332 7900 0000 9332 7910 0000</p>
<p><b>End caps with mounting brackets for surface mounting</b></p> <p>End caps with mounting brackets made of metal</p> <p>For mounting from above</p>		<p>black, left black, right  white, left white right</p>	<p>9332 5840 0000 9332 5880 0000  9332 5860 0000 9332 5900 0000</p>
<p><b>End caps with mounting brackets for substructure mounting</b></p> <p>End caps with mounting brackets made of metal</p> <p>For mounting from below</p>		<p>black, left black, right  white, left white right</p>	<p>9332 5830 0000 9332 5870 0000  9332 5850 0000 9332 5890 0000</p>
<p>Spare double sided strips</p> <p>2x double sided strips for mounting the DockSquare. Removable without residue.</p>			<p>9332 1050 0000</p>



# EVoline® R-Dock

EVoline R-Dock

## A close fit

With its slightly bevelled front and variable mounting options, the R-Dock can be conveniently used in many applications. Thanks to its design, it fits perfectly into any 90-degree angle. Back to back, it becomes a double unit in an open space.



Available colours



Silver




Black



White / black



White / white

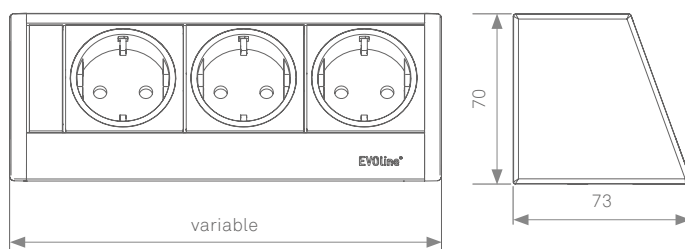


Mounting options for the EVoline Dock can be found on pg.

„EVoline® Dock Accessories“




**Examples of power supply options:**

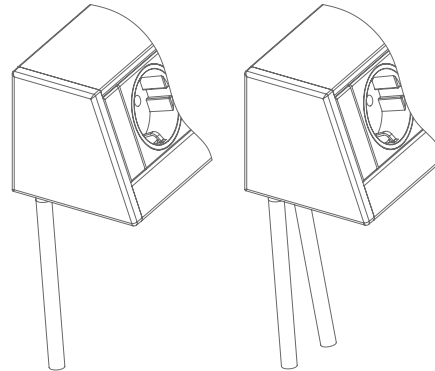


*Fixed Power Supply Cable through the bottom of the profile*

*Available with several country specific plugs, with wire end ferrules, connector powered by GST18 or WAGO WINSTA.*

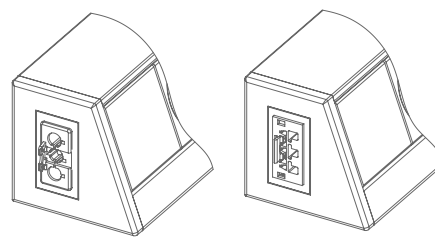

*End cap with power input or output connector powered by GST18 or WAGO WINSTA.*

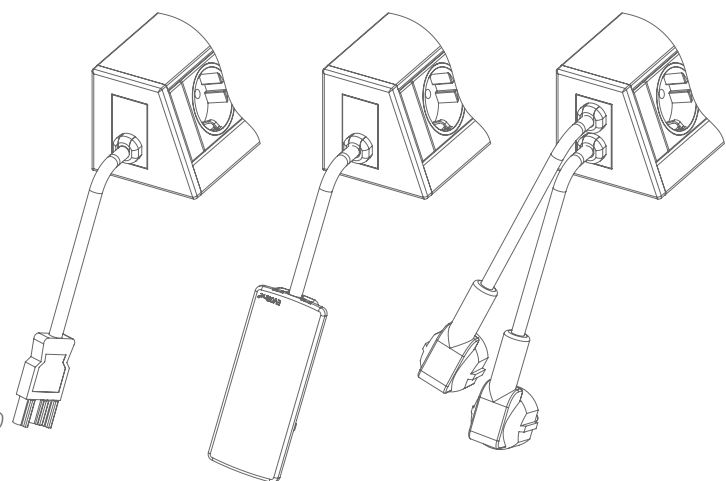

*End cap with fixed power supply cable*

*Available with several country specific plugs, EVoline Plug, wire end ferrules, connector powered by GST18 or WAGO WINSTA.*

Description

Picture

Specifications

Order Number



## Configure your individual EVoline R-Dock.

See page 6 - 7 for instructions.

### Configurable Basic Housing EVoline R-Dock

Aluminium housing.  
Power supply cable entry through  
end cap or profile.



Silver anodised

9331 0620 0000



Black anodised

9332 1980 0000



White powder-coated

9331 4340 0000



# EVoline® U-Dock

EVoline U-Dock

## Under-Desk power bar

The aluminium profile of the EVoline U-Dock can be attached to, below or in front of the worktop in a variety of ways. As a robust basis for a professional power and data supply, it includes freely configurable power and data connections as well as safety modules for the protection of employees and machines. The electrically isolated interchangeable modules can be exchanged at any time.





Available colours



Silver

Black

Optional:  
end cap with  
mounting bracket

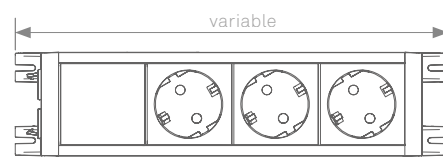


Mounting options for  
the EVoline Dock  
can be found on pg.

„EVoline® Dock Accessories“



## Examples of power supply options:


End cap with input or output connector powered by GST18 or WAGO WINSTA.

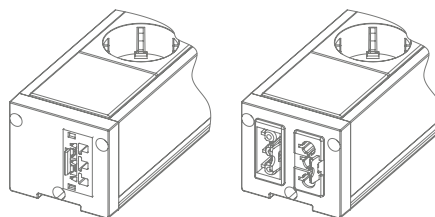


End cap with fixed power supply cable.

Available with several country specific plugs, EVOLine Plug, wire end ferrules, connector powered by GST18 or WAGO WINSTA.

End cap colour: black

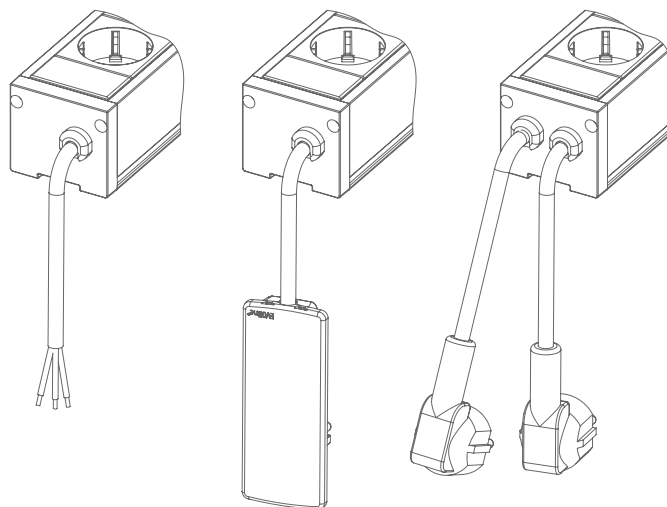

All above mentioned U-Dock end caps are available with or without mounting angles.

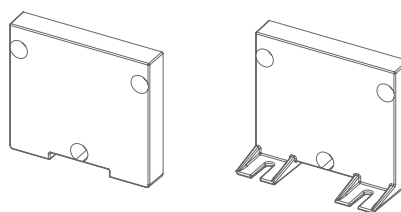



Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**K** **Configure your individual EVoline U-Dock.**  
See page 6 - 7 for instructions.

**Configurable Basic Housing  
EVoline U-Dock**

Aluminium housing  
End caps optionally with or without  
mounting angles



Silver anodised

9330 8510 0000

Black anodised

9332 4770 0000



EVoline V-Dock

**Fits in every corner**

The V-Dock can be mounted horizontally or vertically and is variable in length. A further advantage: the connection cable is invisibly guided behind the profile in the angle. The V-Dock's 45-degree orientation in the room makes it easy to connect power and data cables.




Available colours



Silver



Black

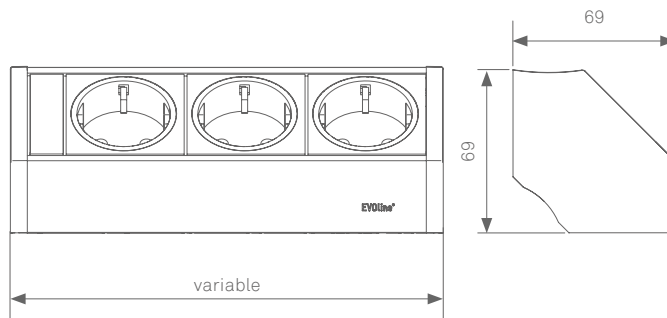


Mounting options for the EVoline Dock can be found on pg.

„EVoline® Dock Accessories“



**Examples of power supply options:**


*End cap with power input and/or output connector.*

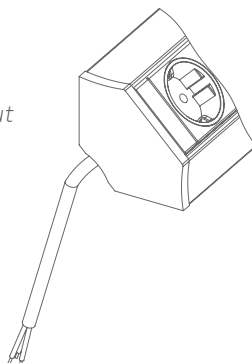

*End cap with fixed power supply cable.*

*Available with several country specific plugs, EVOLine Plug, wire end ferrules, connector powered by GST18 or WAGO WINSTA.*

*End cap colour: black*

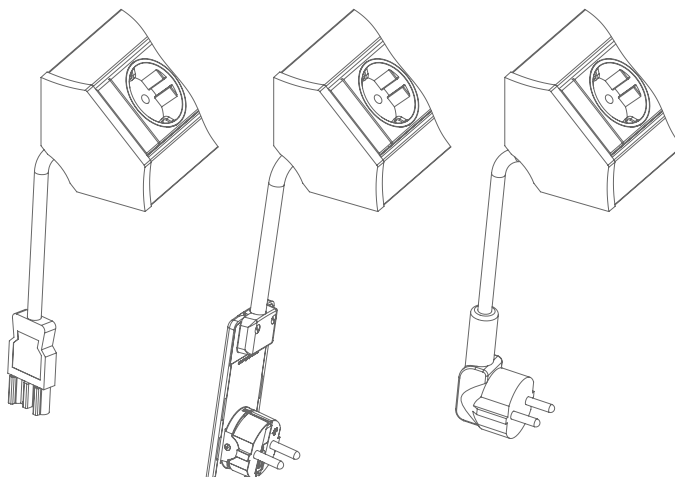

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**K** **Configure your individual EVoline V-Dock.**  
 See page 6 - 7 for instructions.

**Configurable Basic Housing  
 EVoline V-Dock**

Aluminium housing  
 From a length of 250 mm, 2 angle  
 profiles of 100 mm are required for  
 fixing.



Silver anodised

9330 5600 0000

**Configurable Basic Housing  
 EVoline V-Dock**

Aluminium housing  
 From a length of 250 mm, 2 angle  
 profiles of 100 mm are required for  
 fixing.



Black anodised

9331 5850 0000



EVoline Up

## Free standing power outlet

With the vertical electrification solution Up, we present a true space-saving miracle. The stand of the vertical multiple socket can not only be firmly screwed to the base, but can also be securely attached to any table surface - even glass - with the help of adhesive strips and removed without leaving any residue.



Available colours




Silver



Black



White

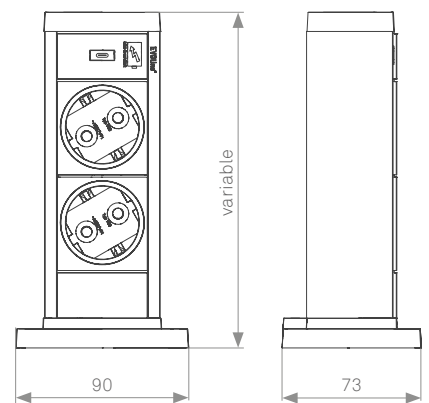

## **K** Configure your individual EVoline Up.

See page 6 - 7 for instructions.

### **Configurable Basic Housing EVoline Up**

Aluminium housing  
2x Adhesive tapes

Note: Max. configuration: 3 ½ modules



### **Housing**

Silver anodised 9332 2690 0000

black anodised 9332 2680 0000

white powder coated 9332 2700 0000







# EVoline® Vertical



EVoline Vertical

**Free standing and movable power unit**

The EVoline Vertical stands freely in the room, stable on a solid base. Upright, mobile and space-saving, it is the ideal solution for offices, hotels or salesrooms. With a height of up to 1.20 m, the EVoline Vertical eliminates the need to bend down for sockets: power, multimedia and data connections are easily accessible at a comfortable height.



Available colours



Silver



Black

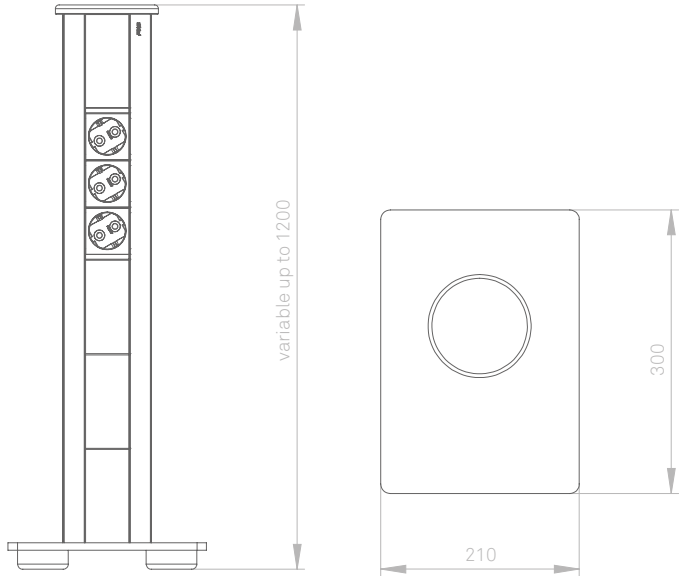

## **K** Configure your individual EVOLine Vertical.

See page 6 - 7 for instructions.

### **Configurable Basic Housing EVOLine Vertical with cast iron base**

Typ 934-3;  
Aluminium housing,  
Cover made of aluminium, black  
powder-coated.  
Base made of solid cast iron, black  
powder-coated.

Dimensions of stand: Ø 225 mm  
height: 40 mm

Total height: approx. 620 -1200mm

Available until the end of 2023



silver anodised 9330 8560 0000

black anodised 9330 8570 0000

Profile height 600 mm  
Max. profile height 1200 mm

Profile extension over 9330 0130 0000  
600 mm per 50 mm

### **Configurable Basic Housing EVOLine Vertical with steel base**

Typ 934-7;  
Housing Aluminium, silver or black  
anodised;  
Cover aluminium, black powder-  
coated  
Stand made of steel, black lac-  
quered with four height-adjustable  
plastic feet.

Dimensions of stand: width 210mm,  
depth 300mm, height 23-29mm;

Total height: approx. 620 -1200mm

Available from the beginning of 2024



silver anodised 9332 7970 0000

black anodised 9332 7980 0000

Profile height 600 mm  
Max. profile height 1200 mm

Profile extension over 9330 0130 0000  
600 mm per 50 mm





# EVoline<sup>®</sup> Express



EVoline Express

### Safety right from the start

EVoline relies for office electrification on a modular power supply with decentralised safety modules. The EVoline Express isolates sensitive circuits from each other and ensures operational safety.

**Self-extin-guishing and flameretardant plastics are standard.**


Available colours





Black



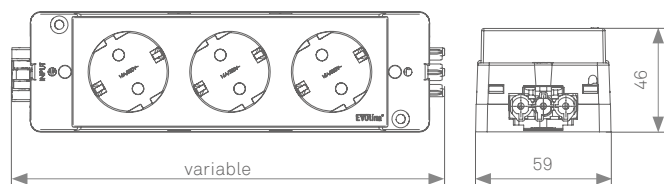



Red









Description	Picture	Specifications	Order Number
<p><b>EVoline Express Type 910 2 gang Power Bar, VDE</b></p> <p>for plug types: F, E+F, C            rated voltage: 250 V / 50 Hz            rated current: 16 A            halogen-free</p> <p>Dimensions : 46 × 59 × 148 mm</p>		<p><b>Powered by GST18</b></p> <p><b>without contact protection</b>            Housing colour black 1591 0200 0100            Housing colour red 1591 0200 0120</p> <p><b>contact protected</b>            Housing colour black 1591 0200 0110            Housing colour red 1591 0200 0130</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b>            Housing colour black 1591 0200 0200            Housing colour red 1591 0200 0220</p> <p><b>contact protected</b>            Housing colour black 1591 0200 0210            Housing colour red 1591 0200 0230</p>	
<p><b>EVoline Express Type 910 3 gang Power Bar, VDE</b></p> <p>for plug types: F, E+F, C            rated voltage: 250 V / 50 Hz            rated current: 16 A            halogen-free</p> <p>Dimensions : 46 × 59 × 198 mm</p>		<p><b>Powered by GST18</b></p> <p><b>without contact protection</b>            Housing colour black 1591 0300 0100            Housing colour red 1591 0300 0120</p> <p><b>contact protected</b>            Housing colour black 1591 0300 0110            Housing colour red 1591 0300 0130</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b>            Housing colour black 1591 0300 0200            Housing colour red 1591 0300 0220</p> <p><b>contact protected</b>            Housing colour black 1591 0300 0210            Housing colour red 1591 0300 0230</p>	




Description	Picture	Specifications	Order Number	
<p><b>EVoline Express Type 910</b>  <b>4 gangPower Bar, VDE</b></p>		<p><b>Powered by GST18</b></p>		
<p>for plug types: F, E+F, C            rated voltage: 250 V / 50 Hz.            rated current: 16 A            halogen-free</p>		<p><b>without contact protection</b></p>	<p>Housing colour black 1591 0400 0100</p>	<p>Housing colour red 1591 0400 0120</p>
<p>Dimensions : 46 × 59 × 248 mm</p>		<p><b>contact protected</b></p>	<p>Housing colour black 1591 0400 0110</p>	<p>Housing colour red 1591 0400 0130</p>
		<p><b>WAGO WINSTA MIDI</b></p>		
		<p><b>without contact protection</b></p>	<p>Housing colour black 1591 0400 0200</p>	<p>Housing colour red 1591 0400 0220</p>
		<p><b>contact protected</b></p>	<p>Housing colour black 1591 0400 0210</p>	<p>Housing colour red 1591 0400 0230</p>






Description	Picture	Specifications	Order Number
<p><b>EVoline Express Type 910</b> <b>2 gang Power Bar, BE/FR</b></p> <p>for plug types: F, E+F, C rated voltage: 250 V / 50 Hz rated current: 16 A halogen-free</p> <p>Dimensions : 46 × 59 × 148 mm</p>		<p>Powered by GST18</p> <p><b>without contact protection</b></p> <p>Housing colour black</p> <p>Housing colour red</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b></p> <p>Housing colour black</p> <p>Housing colour red</p>	<p>1591 0201 0100</p> <p>1591 0201 0120</p> <p>1591 0201 0200</p> <p>1591 0201 0220</p>
<p><b>EVoline Express Type 910</b> <b>3 gang Power Bar, BE/FR</b></p> <p>Rated voltage: 250V / 50 Hz Rated current: 16 A halogen-free</p> <p>Dimensions : 46 × 59 × 198 mm</p>		<p>Powered by GST18</p> <p><b>without contact protection</b></p> <p>Housing colour black</p> <p>Housing colour red</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b></p> <p>Housing colour black</p> <p>Housing colour red</p>	<p>1591 0301 0100</p> <p>1591 0301 0120</p> <p>1591 0301 0200</p> <p>1591 0301 0220</p>
<p><b>EVoline Express Type 910</b> <b>4 gang Power Bar, BE/FR</b></p> <p>Rated voltage: 250V / 50 Hz Rated current: 16 A halogen-free</p> <p>Dimensions : 46 × 59 × 248 mm</p>		<p>Powered by GST18</p> <p><b>without contact protection</b></p> <p>Housing colour black</p> <p>Housing colour red</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b></p> <p>Housing colour black</p> <p>Housing colour red</p>	<p>1591 0401 0100</p> <p>1591 0401 0120</p> <p>1591 0401 0200</p> <p>1591 0401 0220</p>


Description	Picture	Specifications	Order Number
<p><b>EVoline Express Type 910 2 gang Power Bar, CH</b></p> <p>Rated voltage: 250V / 50 Hz Rated current: 10 A halogen-free</p> <p>Dimensions : 46 × 59 × 148 mm</p>		<p>Powered by GST18</p> <p><b>without contact protection</b></p> <p>Housing colour black Housing colour red</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b></p> <p>Housing colour black Housing colour red</p>	<p>1591 0203 0100 1591 0203 0120</p> <p>1591 0203 0200 1591 0203 0220</p>
<p><b>EVoline Express Type 910 3 gang Power Bar, CH</b></p> <p>Rated voltage: 250V / 50 Hz Rated current: 10 A halogen-free</p> <p>Dimensions : 46 × 59 × 198 mm</p>		<p>Powered by GST18</p> <p><b>without contact protection</b></p> <p>Housing colour black Housing colour red</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b></p> <p>Housing colour black Housing colour red</p>	<p>1591 0303 0100 1591 0303 0120</p> <p>1591 0303 0200 1591 0303 0220</p>
<p><b>EVoline Express Type 910 4 gang Power Bar, CH</b></p> <p>Rated voltage: 250V / 50 Hz Rated current: 10 A halogen-free</p> <p>Dimensions : 46 × 59 × 248 mm</p>		<p>Powered by GST18</p> <p><b>without contact protection</b></p> <p>Housing colour black Housing colour red</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b></p> <p>Housing colour black Housing colour red</p>	<p>1591 0403 0100 1591 0403 0120</p> <p>1591 0403 0200 1591 0403 0220</p>

Description	Picture	Specifications	Order Number
<p><b>EVoline Express Typ 910 2 gang Power Bar, GB</b></p> <p>Rated voltage: 250 V / 50 Hz halogen-free</p> <p>Dimensions: 46 × 59 × 148 mm</p>		<p><b>Powered by GST18</b></p> <p><b>with contact protection</b> Housing colour black Rated current: 13 A</p> <p><b>with contact protection</b> Housing colour black Single fuse: 3,15 A</p> <p><b>with contact protection</b> Housing colour black Single fuse: 5 A</p>	<p>1591 0206 0110</p> <p>1591 0207 0110</p> <p>1591 0208 0110</p>
<p><b>EVoline Express Typ 910 3 gang Power Bar, GB</b></p> <p>Rated voltage: 250 V / 50 Hz halogen-free</p> <p>Dimensions: 46 × 59 × 198 mm</p>		<p><b>Powered by GST18</b></p> <p><b>with contact protection</b> Housing colour black Rated current: 13 A</p> <p><b>with contact protection</b> Housing colour black Single fuse: 3,15 A</p> <p><b>with contact protection</b> Housing colour black Single fuse: 5 A</p>	<p>1591 0306 0110</p> <p>1591 0307 0110</p> <p>1591 0308 0110</p>
<p><b>EVoline Express Typ 910 4 gang Power Bar, GB</b></p> <p>Rated voltage: 250 V / 50 Hz halogen-free</p> <p>Dimensions: 46 × 59 × 248 mm</p>		<p><b>Powered by GST18</b></p> <p><b>with contact protection</b> Housing colour black Rated current: 13 A</p> <p><b>with contact protection</b> Housing colour black Single fuse: 3,15 A</p> <p><b>with contact protection</b> Housing colour black Single fuse: 5 A</p>	<p>1591 0406 0110</p> <p>1591 0407 0110</p> <p>1591 0408 0110</p>

Description	Picture	Specifications	Order Number
<p><b>EVoline Express Type 901 3 gang Power Bar</b></p> <p>Rated voltage: 250V / 50 Hz Rated current: 16 A halogen-free</p> <p>Dimensions : 39 x 59 x 186 mm</p>		<p>Powered by GST18</p> <p>Housing colour black Housing colour red</p>	<p>1590 1100 1500 1590 1100 1600</p>






Description	Picture	Specifications	Order Number
<p><b>EVOLine Express Power Cord</b></p> <p>Plug type F, E &amp; C (e.g. Germany, Austria, France) with protective contact right-angle plug and connector (socket) Cable 3 x 1.5 mm<sup>2</sup> Colour: black</p>		<p><b>Socket connector (Jack)</b></p> <p>Cable length 1 m (black) 6590 0601 0500            Cable length 1,5 m (black) 6590 0601 5500            Cable length 2 m (black) 6590 0602 0500            Cable length 3 m (black) 6590 0603 0500            Cable length 3 m (red) 6590 0603 0600            Cable length 4 m (black) 6590 0604 0500            Cable length 5 m (black) 6590 0605 0500            Cable length 5 m (red) 6590 0605 0600</p>	
<p><b>EVOLine Express Power Cord</b></p> <p>Plug type G (e.g. Great Britain), 13 A with protective contact right-angle plug and connector (socket) Cable 3 x 1.5 mm<sup>2</sup> Colour: black</p>		<p><b>Socket connector (Jack)</b></p> <p>Cable length 3 m 6591 1603 0500</p>	
<p><b>EVOLine Express Power Cord</b></p> <p>Plug type J &amp; C (e.g. Switzerland) with earthing contact plug and connector (socket) Cable 3 x 1.5 mm<sup>2</sup> Colour: black</p>		<p><b>Socket connector (Jack)</b></p> <p>Cable length 3 m, 10 A 1590 0623 0500</p>	
<p><b>EVOLine Express Power Supply Module with Overload Circuit Breaker</b></p> <p>Plug type J &amp; C (e.g. Switzerland) with overload switch 10 A reconnectable and plug connector (socket) Cable 3 x 1.5 mm<sup>2</sup> Colour: black</p>		<p><b>Socket connector (Jack)</b></p> <p>Cable length 3 m 1599 0911 7200</p>	




Description	Picture	Specifications	Order Number
<p><b>EVoline Express VDE Coupling</b></p> <p>Coupling for plug type F, E &amp; C (e.g. Germany, Austria, France) Cable 3 x 1.5 mm<sup>2</sup> Colour: black</p>		<p><b>Socket connector (Plug)</b></p> <p>Cable length 0,5 m</p>	1599 0912 5400
<p><b>EVoline Express connection cable</b></p> <p>Cable 3 x 1,5mm<sup>2</sup> with socket connector (plug) and socket connector (jack) Colour: black</p>		<p>Cable length 0,5 m Cable length 0,8 m Cable length 0,9 m Cable length 1,0 m Cable length 1,5 m Cable length 2,0 m Cable length 2,5 m Cable length 3 m Cable length 4 m Cable length 5 m</p>	<p>6590 0700 5500 6590 0700 8500 6590 0700 9500 6590 0701 0500 6590 0701 5500 6590 0702 0500 6590 0702 5500 6590 0703 0500 6590 0704 0500 6590 0705 0500</p>
<p><b>EVoline Express cable</b></p> <p>Freely configurable cable, Plug and socket.  Cable 3 x 1,5 mm<sup>2</sup></p>		<p><b>Cable:</b></p> <p>black (minimum 0,2 m) Cable extension (per 0.1 m)</p> <p>red (minimum 0,2 m) Cable extension (per 0.1 m)</p> <p>white (minimum 0,2 m) Cable extension (per 0.1 m)</p>	<p>9331 7920 0000  9331 7930 0000  9331 9070 0000</p>
		<p><b>Plug:</b></p> <p>Powered by GST18 (black) Powered by GST18 (white) Powered by GST15 (Mini) (black)</p>	<p>9331 7940 0000 9331 9850 0000 9332 6150 0000</p>
		<p>WAGO WINSTA MIDI (black) WAGO WINSTA MIDI (white)</p>	<p>9331 7950 0000 9331 9080 0000</p>






Description	Picture	Specifications	Order Number
		EVoline PlugFix (black)	9332 4740 0000
		EVoline PlugFix (white)	9332 1630 0000
		EVoline PlugMiniFix (black)	9332 7220 0000
		EVoline PlugMiniFix (white)	9332 7210 0000
		Plug Great Britain 13 A	9332 3620 0000
		Plug Switzerland 10 A	9332 2620 0000
		Plug Switzerland 16 A	9332 0800 0000
		Reset-Plug Switzerland 10 A	9332 1430 0000
		Plug Italy	9332 4320 0000
		<b>Socket:</b>	
		Powered by GST18 (black)	9331 7960 0000
		Powered by GST18 (white)	9331 9860 0000
		Powered by GST15 (Mini) (black)	9332 6160 0000
		WAGO WINSTA MIDI (black)	9331 7970 0000
		WAGO WINSTA MIDI (white)	9331 9090 0000
<b>EVoline Express Connectors</b>		<b>Plug:</b>	
Separat, without cable.		Powered by GST18	1599 0907 7000
		WAGO WINSTA MIDI	1599 0910 9500
		<b>Socket:</b>	
		Powered by GST18	1599 0905 9000
		WAGO WINSTA MIDI	1599 0910 9600



Description	Picture	Specifications	Order Number
<p>Distributor Powered by GST18</p> <p>250 V, 20 A Input: Plug 3-pole</p>		<p>2x Output: Connector 3-pole Flat Shape with Lock without Mounting clip</p>	6599 0906 8300
		<p>2x Output: Connector 3-pole T-Shape with Lock without Mounting clip</p>	6599 0905 2200
		<p>2x Output: Connector 3-pole h-Shape with Lock without Mounting clip Plug directly into Express sockets</p>	6599 0911 3000
		<p>3x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0911 7000
		<p>5x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0911 7100
<p><b>Distributor</b> <b>Powered by GST15 (Mini)</b></p> <p>250 V, 16 A Input: Plug 3-pole</p>		<p>5x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0912 7300
<p><b>Y-Cable Distributor</b> <b>Powered by GST18</b></p> <p>1x Input, Plug 3-pole, Powered by GST18</p>		<p>2x Output, Connector 3-pole, Powered by GST18 with Lock without Mounting clip Lenght: 300 mm</p>	6599 0906 6600

Description	Picture	Specifications	Order Number
<p><b>Installation connector with Euro coupling</b></p>		<p>1x input: plug 1x output: socket 3-pole with locking device 1x Euro socket with 80 mm cable</p>	6599 0913 2100
<p><b>Distributor WAGO WINSTA</b></p> <p>250 V, 25 A Input: Plug 3-pole</p>		<p>2x Output: Connector 3-pole T-Shape with Lock without Mounting clip</p>	6599 0906 9100
		<p>2x Output: Connector 3-pole h-Shape with Lock with Mounting plate</p>	1599 0911 7600
		<p>3x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0911 7300
		<p>5x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0911 7400

Description	Picture	Specifications	Order Number
<p><b>EVoline Rail</b></p> <p>For under desk installation, for the EVoline Express range. Black plastic brackets. Black aluminium profiles</p>		<p><b>2 black plastic brackets with 2 aluminium profiles</b></p> <p>Profile length 165 mm (for 3 gang)</p> <p>Profile length 215 mm (for 4 gang)</p>	<p>1593 5400 0300</p> <p>1593 5400 0400</p>
		<p><b>Individual</b></p> <p>1 black plastic brackets for EVoline Express</p>	<p>9331 6230 0000</p>
		<p>1 pair of Aluminium profiles per 100 mm</p>	<p>9331 6210 0000</p>

Description	Picture	Specifications	Order Number
<p><b>Cover cap for EVoline Express</b></p> <p>for screw holes (suitable for Express type 901 and 910)</p>		<p>Housing colour black</p> <p>Housing colour red</p> <p>Housing colour green</p>	<p>1591 1830 0400</p> <p>1591 1830 0500</p> <p>1591 1830 0700</p>
<p><b>EVoline Express Module Connector</b></p> <p>for a safe connection of plugged EVoline modules (for Express 901/910)</p>		<p>black</p> <p>red</p>	<p>1591 1830 0100</p> <p>1591 1830 0200</p>
<p><b>EVoline Interlock Powered by GST18</b></p> <p>two parts, can be released by hand without tools, for flying socket-plug connections between two cables, must not be used for fixed installations.</p>		<p>black</p>	<p>1599 0911 7700</p>
<p><b>EVoline Express Interlock Powered by GST18</b></p> <p>Free cable connections snap-on for jacks or suitable plugs. According to approvals a locking must be provided.</p>		<p>black</p>	<p>1599 0909 6700</p>
<p><b>EVoline Express Closure Cap Powered by GST18</b></p> <p>To cover unassigned connectors</p>		<p>black</p>	<p>1599 0901 9400</p>





EVoline®  
4P5A 6000

# EVoline® APSA 6000

EVoline APSA 6000

## The robust socket strip for assembly tables

The APSA 6000 was specially designed for use in industrial and craft businesses, offices and schools. The screw spacing of 38 mm makes it easy to mount, e.g. also on standard mounting profiles. The bevelled side caps make the APSA 6000 very easy to mount.




Available colours










Silver



Black

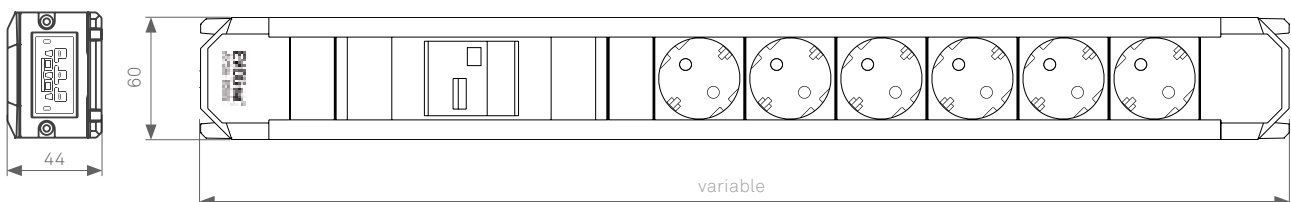

Description	Sockets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
<b>EVoline APSA 6000</b>					
Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2 m fixed mains cable with VDE angled plug					
	3	262.0	si/bl	D6000.00003.02.020	1597 0600 0100
	3	262.0	bl/bl	D6000.00003.22.020	1597 0600 0200
					
	6	394.0	si/bl	D6000.00006.02.020	1597 0600 0300
	6	394.0	bl/bl	D6000.00006.22.020	1597 0600 0400
					
	9	526.0	si/bl	D6000.00009.02.020	1597 0600 0500
	9	526.0	bl/bl	D6000.00009.22.020	1597 0600 0600
					
	12	658.0	si/bl	D6000.00012.02.020	1597 0600 0700
	12	658.0	bl/bl	D6000.00012.22.020	1597 0600 0800
<b>EVoline APSA 6000 with switch</b>					
Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch green, at the line input 2 m fixed mains cable with VDE angled plug					
	3	306.0	si/bl	D6000.00S03.02.020	1597 0600 0900
	3	306.0	bl/bl	D6000.00S03.22.020	1597 0600 1000
					
	6	438.0	si/bl	D6000.00S06.02.020	1597 0600 1100
	6	438.0	bl/bl	D6000.00S06.22.020	1597 0600 1200
					
	9	570.0	si/bl	D6000.00S09.02.020	1597 0600 1300
	9	570.0	bl/bl	D6000.00S09.22.020	1597 0600 1400
					
	12	702.0	si/bl	D6000.00S12.02.020	1597 0600 1500
	12	702.0	bl/bl	D6000.00S12.22.020	1597 0600 1600

si = silver / bl = black

<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour  
Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.











Description	Sockets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
<b>EVoline APSA 6000 with circuit breaker</b>					
Multiple socket strip made of anodised aluminium VDE sockets, 16 A Circuit breaker, 2-pin, B characteristic 2 m fixed mains cable with VDE angled plug	6	526.0	si/bl	D6000.0LS06.02.020	1597 0600 1700
	6	526.0	bl/bl	D6000.0LS06.22.020	1597 0600 1800
<b>EVoline APSA 6000 with FI switch</b>					
Multiple socket strip made of anodised aluminium VDE sockets, 16 A FI switch 25 A, 30mA 2 m fixed mains cable with VDE angled plug	6	526.0	si/bl	D6000.0FI06.02.020	1597 0600 1900
	6	526.0	bl/bl	D6000.0FI06.22.020	1597 0600 2000
<b>EVoline APSA 6000 with connector powered by GST18</b>					
Multiple socket strip made of anodised aluminium VDE sockets, 16 A Input into the side cap connector powered by GST18	3	262.0	si/bl	D6002.00003.02.000	1597 0600 2100
	3	262.0	bl/bl	D6002.00003.22.000	1597 0600 2200
	6	394.0	si/bl	D6002.00006.02.000	1597 0600 2300
	6	394.0	bl/bl	D6002.00006.22.000	1597 0600 2400
	9	526.0	si/bl	D6002.00009.02.000	1597 0600 2500
	9	526.0	bl/bl	D6002.00009.22.000	1597 0600 2600
	12	658.0	si/bl	D6002.00012.02.000	1597 0600 2700
	12	658.0	bl/bl	D6002.00012.22.000	1597 0600 2800
<b>EVoline APSA 6000 with WAGO WINSTA connector and switch</b>					
Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch green, at the line input Input into the side cap WAGO WINSTA connector	6	438.0	si/bl	D6005.00S06.02.000	1597 0600 6500









si = silver / bl = black

<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour

Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.

Description	Sockets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number		
<b>EVoline APSA 6000 with connector powered by GST18 and switch</b>  Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch green, at the line input Input into the side cap connector powered by GST18		3	306.0	si/bl	D6002.00S03.02.000	1597 0600 2900	
	3	306.0	bl/bl	D6002.00S03.22.000	1597 0600 3000		
		6	438.0	si/bl	D6002.00S06.02.000	1597 0600 3100	
	6	438.0	bl/bl	D6002.00S06.22.000	1597 0600 3200		
		9	570.0	si/bl	D6002.00S09.02.000	1597 0600 3300	
	9	570.0	bl/bl	D6002.00S09.22.000	1597 0600 3400		
		12	702.0	si/bl	D6002.00S12.02.000	1597 0600 3500	
	12	702.0	bl/bl	D6002.00S12.22.000	1597 0600 3600		
	<b>EVoline APSA 6000 with switch</b>  Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch green, frontal opposite the line input, switch code: 2S 2 m fixed power cord with VDE angled plug		3	328.0	si/bl	D6000.02S03.02.020	1597 0600 3700
		3	328.0	bl/bl	D6000.02S03.22.020	1597 0600 3800	
			6	460.0	si/bl	D6000.02S06.02.020	1597 0600 3900
		6	460.0	bl/bl	D6000.02S06.22.020	1597 0600 4000	
		9	592.0	si/bl	D6000.02S09.02.020	1597 0600 4100	
9		592.0	bl/bl	D6000.02S09.22.020	1597 0600 4200		
		12	724.0	si/bl	D6000.02S12.02.020	1597 0600 4300	
12		724.0	bl/bl	D6000.02S12.22.020	1597 0600 4400		

si = silver / bl = black

Description	Sockets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number	
<b>EVoline APSA 6000 with switch at the front end</b>						
Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch green, at the front end opposite the line input, switch code: 3S 2 m fixed power cord with VDE angled plug		3	284.0	si/bl	D6000.03S03.02.020	1597 0600 4500
		3	284.0	bl/bl	D6000.03S03.22.020	1597 0600 4600
		6	416.0	si/bl	D6000.03S06.02.020	1597 0600 4700
	6	416.0	bl/bl	D6000.03S06.22.020	1597 0600 4800	
		9	548.0	si/bl	D6000.03S09.02.020	1597 0600 4900
		9	548.0	bl/bl	D6000.03S09.22.020	1597 0600 5000
		12	680.0	si/bl	D6000.03S12.02.020	1597 0600 5100
		12	680.0	bl/bl	D6000.03S12.22.020	1597 0600 5200
<b>EVoline APSA 6000 with 2 switches and 2 switched circuits</b>						
Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch red, for red sockets 2-pin illuminated switch green, for green sockets 2 m fixed mains cable with VDE angled plug		2 + 2	438.0	bl/bl	D6.Sg2Sr2.221312.020	1597 0600 5300
		3 + 3	526.0	bl/bl	D6.Sg3Sr3.221312.020	1597 0600 5400
<b>EVoline APSA 6000 with 2 switches and 2 switched circuits</b>						
Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch green, for black sockets 2-pin illuminated switch green, for black sockets 2 m fixed mains cable with VDE angled plug		2 + 2	438.0	bl/bl	D6.Sg2Sg2.220202.020	1597 0600 5500
		3 + 3	526.0	bl/bl	D6.Sg3Sg3.220202.020	1597 0600 5600

si = silver / bl = black

<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour

Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.



EVOLINE<sup>®</sup>  
APSA 7000

EVOLINE<sup>®</sup>  
APSA 7000

EVOLINE<sup>®</sup>  
APSA 7000

EVOLINE<sup>®</sup>  
APSA 7000


# EVoline® APSA 7000

EVoline APSA 7000

## Server cabinet connectivity

The EVoline APSA 7000 has been specially developed for installation in 19" server racks. The possibility of horizontal or vertical installation means that it takes up space from one height unit (1HU) to an ideal, universally mountable connector strip in the server rack. The EVoline APSA 7000 is available in many different versions. This includes options in black or grey, with protective contact sockets in different colours, cold device sockets or with 2-pin switches and circuit breakers.


The scope of delivery of the EVoline APSA 7000 always includes a set with two fixing brackets and eight screws. Alternatively, a rotation angle is also available, which, without loosening screws, can be turned into another 90° position at any time at the touch of a button.

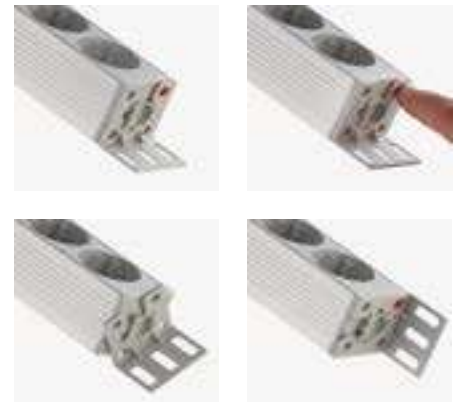


Available surfaces



Silver



Black

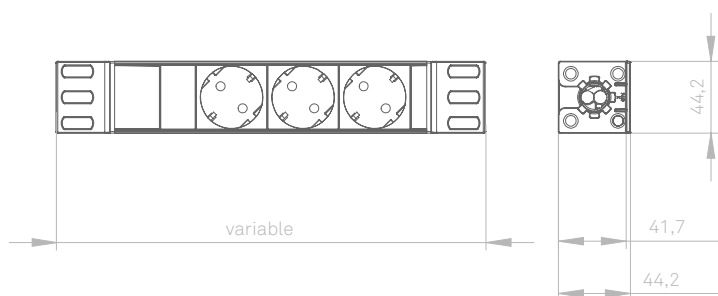

# EVOLine® APSA 7000

Description	Angle	Sock-ets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
<b>EVOLine APSA 7000 VDE</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	7	482.6	si/gr	D7000.00007.03.020	1597 0700 0100
	L	7	482.6	bl/bl	D7000.00007.22.020	1597 0700 0300
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	8	482.6	si/gr	D7000.00008.03.020	1597 0700 0200
	L	8	482.6	bl/bl	D7000.00008.22.020	1597 0700 0400
<b>EVOLine APSA 7000 VDE</b>						
20,7" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	9	526.6	si/gr	D7000.00009.03.02052	1597 0700 0500
	L	9	526.6	bl/bl	D7000.00009.22.02052	1597 0700 0600
<b>EVOLine APSA 7000 VDE with switch</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch red 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	7	482.6	si/gr	D7000.00S07.03.020	1597 0700 0700
	L	7	482.6	bl/bl	D7000.00S07.22.020	1597 0700 0800
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch red 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	S	8	482.6	si/gr	D7000.00S08.03.020	1597 0700 0900
	S	8	482.6	bl/bl	D7000.00S08.22.020	1597 0700 1000
<b>EVOLine APSA 7000 VDE with circuit breaker</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A Circuit breaker, 2-pin, B characteristic 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	5	482.6	si/gr	D7000.0LS05.03.020	1597 0700 1100
	L	5	482.6	bl/bl	D7000.0LS05.22.020	1597 0700 1200

L = long / S = short / gr = grey / si = silver / bl = black

<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour  
Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.

Description	Angle	Sock-ets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
<b>EVoline APSA 7000 VDE with FI switch</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A FI switch 25 A 30mA type A, 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	5	482.6	si/gr	D7000.0FI05.03.020	1597 0700 1300
	L	5	482.6	bl/bl	D7000.0FI05.22.020	1597 0700 1400
<b>EVoline APSA 7000 VDE with FI/LS switch</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A FI/LS switch 16 A, 30mA 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	5	482.6	si/gr	D7000.0FL05.03.020	1597 0700 1500
	L	5	482.6	bl/bl	D7000.0FL05.22.020	1597 0700 1600
<b>EVoline APSA 7000 VDE with connector powered by GST18</b>						
19 multiple socket strip made of anodised aluminium VDE sockets, 16 A Infeed on the frontal connector powered by GST18 incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	7	482.6	si/gr	D7002.00007.03.000	1597 0700 1700
	L	7	482.6	bl/bl	D7002.00007.22.000	1597 0700 1800
<b>EVoline APSA 7000 VDE with connector powered by GST18 and switch</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch red Infeed on the frontal connector powered by GST18 incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	6	482.6	si/gr	D7002.00S06.03.000	1597 0700 1900
	L	6	482.6	bl/bl	D7002.00S06.22.000	1597 0700 2000

L = long / S = short / gr = grey / si = silver / bl = black

<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour


Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.

Description	Angle	Sock-ets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
<b>EVoline APSA 7000 VDE with IEC connector C14</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A Infeed on the frontal C14, 10 A IEC connector incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	7	482.6	si/gr	D7003.00007.03.000	1597 0700 2100
	L	7	482.6	bl/bl	D7003.00007.22.000	1597 0700 2200
<b>EVoline APSA 7000 VDE with IEC connector C14 and switch</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch red Infeed at the frontal C14, 10 A IEC connector incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	6	482.6	si/gr	D7003.00S06.03.000	1597 0700 2300
	L	6	482.6	bl/bl	D7003.00S06.22.000	1597 0700 2400
<b>EVoline APSA 7000 IEC connector C13 with IEC connector C14</b>						
19" multiple socket strip made of anodised aluminium IEC connector sockets C13, 10 A Infeed on the frontal C14, 10 A IEC connector incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	9	482.6	si/bl	W7302.00009.02.000	1597 0700 3300
	L	9	482.6	bl/bl	W7302.00009.22.000	1597 0700 3400
<b>EVoline APSA 7000 IEC connector C13 with IEC connector C14 and switch</b>						
19" multiple socket strip made of anodised aluminium IEC connector C13, 10 A 2-pin illuminated switch red Infeed at the frontal C14, 10 A IEC connector incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	9	482.6	si/bl	W7302.00S09.02.000	1597 0700 3500
	L	9	482.6	bl/bl	W7302.00S09.22.000	1597 0700 3600



Description	Angle	Socket- ets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
-------------	-------	----------------	-----------------------------	---------------------	---------	--------------


**EVoline APSA 7000 IEC connector sockets C19/16A**



19" multiple socket strip  
made of anodised aluminium  
IEC connector C19, 16 A  
2 m fixed mains cable with  
VDE angled plug  
incl. 2 mounting brackets  
and 8 Phillips screws PZ 1

L	6	482.6	si/bl	W9000.00006.02.000	1597 0700 3700
---	---	-------	-------	--------------------	----------------

**EVoline APSA 7000 IEC connector C19/16A with IEC connector C20/16A**



19" multiple socket strip  
made of anodised aluminium  
IEC connector sockets C19, 10 A  
Infeed on the frontal C20, 16 A IEC connector  
incl. 2 mounting brackets  
and 8 Phillips screws PZ 1

L	5	482.6	si/bl	W9001.00005.02.000	1597 0700 3900
---	---	-------	-------	--------------------	----------------

**EVoline APSA Cage nut set**



For installing the 7000 socket strips  
in server cabinets.  
4 pieces per set

9450 0000 3400
----------------

L = long / S = short / gr = grey / si = silver / bl = black

<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour

Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.



# EVoline® WirelessCharger

EVoline QCharger

## Wireless Charging


All wireless-compatible devices can be charged with the QCharger. It is installed either under the table or worktop - so that the charging station is invisible - or as an insert for standard openings of  $\varnothing$  80 mm. The device to be charged is simply placed in the appropriate place - pure minimalism.



EVoline DisQ

## Wireless Inductive Charging

The EVoline DisQ charges all devices that support wireless charging with a power of up to 15 watts. Thanks to the integrated magnet the DisQ adheres to compatible devices and ensures perfect positioning in relation to the charging coil.

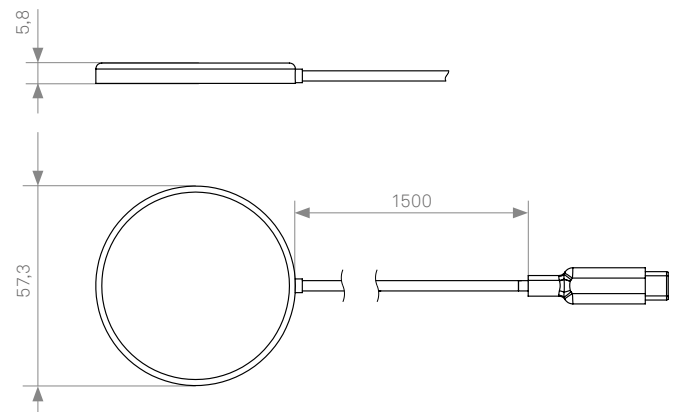

A separate plug-in power supply with USB-C connection is required for the function.



# EVoline® Wireless Charger

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

## EVoline QCharger

Wireless charger for inductive devices.  
For integration into the table worktop or for installation in openings Ø 80 mm.  
Thanks to the integrated magnet, suitable devices connect and centre themselves and the charging process starts immediately.



USB power supply with Euro plug 1599 0911 2800

USB power supply with universal connector set (US, EU, AU/CN, UK) 1599 0912 3800

Power consumption:

5 V / 2 A; 9 V / 2.22 A

Power output (inductive):

max. 15 W

Protective functions:

Overvoltage, overcurrent, short circuit, temperature

Compatibility: WPC Qi2.0

1.5 m cable black, with USB C plug and USB C power supply unit

## EVoline DisQ

For fast wireless charging.  
Thanks to the integrated magnet, suitable devices connect and centre themselves and the charging process begins immediately.



1599 0912 9400

In: DC 5 V / 3 A

DC 9 V / 2 A

Out: max. 15 W

1.5 m cable black, with USB C plug, without power supply unit

Diameter: 58 mm

Height: 6 mm

## Wireless charging

- inductive coupling between transmitter (charging station) and receiver (mobile phone)
- vendor independent, charges devices with inductive charging function (the unit must be placed centrally and flat over the coil).
- transmitter coil is active only when a connection to the receiving device is made
- Please note: The charging function may be impaired by covers or protruding housing parts (e.g. cameras).





reddot design award  
winner 2011



Ausgezeichnet mit dem 1. Preis  
Universal Home: Product Design  
Designpreis des Landes  
Nordrhein-Westfalen



Designpreis  
Deutschland  
2011  
NOMINIERT



interior  
innovation  
award  
2011  
Winner



Ausgezeichnet mit der  
IENA Goldmedaille



universal  
design  
award 2010  
universal  
design  
consumer  
favorite 2010



DOBRY  
WZÓR  
2012

# EVOLine® Plug



EVOLine Plug / Plug Fix / PlugMini Fix

## Hinged plug - Increased trip prevention

The extra-flat EVOLine Plug easily fits behind every piece of furniture. Its intelligent hinge mechanism turns the grip into a lever - this way the plug can be removed from the socket without the use of force. Even if the cable is jerked, the plug is released without damage. The EVOLine Plug has won numerous awards for its smart ergonomics and minimalist design.



### Plug

Loose plug,  
for connection  
to 3 wire cable






### Plug Fix

With installed cable and  
coupling or multiple  
socket.



### PlugMini Fix

The PlugMini Fix is smaller than the PlugFix and still has all the advantages. Supplied with fitted cable.



# EVoline® Plug | Plug Fix | PlugMini Fix

Description	Picture	Specifications	Order Number
<p><b>EVoline Plug</b></p> <p>Screwable ultra-low profile grounded plug with movable face, for wire diameters of 0.75 mm<sup>2</sup> to 1.5 mm<sup>2</sup>, 250 V / 16 A</p>		<p>black</p> <p>white</p>	<p>1510 0000 0100*</p> <p>1510 0000 0300*</p>
<p><b>EVoline PlugFix</b></p> <p>Ultra-low profile grounded plug with movable face, with cable 3 × 1.5 mm<sup>2</sup> connected to 3 gang power bar EVoline Express, 250 V / 16 A</p>		<p>black, with 1.5 m cable</p> <p>white, with 1.5 m cable</p>	<p>1510 0015 6100*</p> <p>1510 0015 6300*</p>
<p><b>EVoline PlugFix</b></p> <p>Ultra-low profile grounded plug with movable face, with cable 3 × 1.5 mm<sup>2</sup> connected to socket coupling with contact protection, 250 V / 16 A</p>		<p>black, with 3 m cable</p> <p>black, with 1.5 m cable</p> <p>white, with 3 m cable</p> <p>white, with 1.5 m cable</p>	<p>1510 0030 5100*</p> <p>1510 0015 5100*</p> <p>1510 0030 5300*</p> <p>1510 0015 5300*</p>
<p><b>EVoline PlugFix</b></p> <p>Ultra-low profile grounded plug with movable face, with cable 3 × 1.5 mm<sup>2</sup> and connector.</p>		<p>Socket connector black 1.5 m cable and socket</p> <p>WAGO WINSTA black 1.5 m cable and socket</p>	<p>1510 0015 2100*</p> <p>1510 0015 8100*</p>
<p><b>EVoline PlugFix</b></p> <p>Ultra-low profile grounded plug with movable face, with Fix</p>		<p>black, with 1.5 m cable</p> <p>white, with 1.5 m cable</p>	<p>1510 0015 1100*</p> <p>1510 0015 1300*</p>
<p><b>EVoline PlugMiniFix</b></p> <p>Connector type E + F 16 A, 3 x 1.5 mm<sup>2</sup> e.g. Germany Extra small and ultra-low profile grounded plug with movable face.</p>		<p>black, with 1.5 m cable</p> <p>white, with 1.5 m cable</p> <p>Powered by GST18, black, 1.5 m cable and socket</p>	<p>1512 0015 1100*</p> <p>1512 0015 1300*</p> <p>1512 0015 2100*</p>

**\*Minimum order quantity: 20 piece**






# EVOLine® Sockets



The chart below gives an overview about country specific socket versions. Deviations may occur.


**Socket VDE (CEE 7/3)**  
230 V, 16 A



Plug Type  
F, E+F, C

Algeria, Andorra, Armenia, Austria, Bosnia and Herzegovina, Bulgaria, Croatia, Estonia, Finland, Georgia, Germany, Hungary, Iceland, Latvia, Lithuania, Luxembourg, Macedonia, Moldova, Montenegro, Netherlands, Norway, Portugal, Romania, Russia, Serbia, South Korea, Spain, Ukraine


**Socket (CEE 7/5)**  
230 V, 16 A



Plug Type  
E, E+F, C

France, Belgium, Cameroon, Czech Republic, Mali, Morocco, Poland, Slovakia, Tunisia


**Socket (BS 1363)**  
230 V, 3,15 A oder 5 A



Plug Type  
G

Great Britain, Bahrain, Cyprus, Hong Kong, Indonesia, Ireland, Kenya, Kuwait, Malaysia, Malta, Mauritius, Nigeria, Oman, Qatar, Saudi Arabia, Singapore, United Arab Emirates, Zimbabwe


**Socket (SEV 1011)**  
230 V, 10 A, T13



Plug Type  
J, C

Switzerland, Liechtenstein


**Socket (SEV 1011)**  
230 V, 16 A, T23



Plug Type  
J, C

Switzerland, Liechtenstein


**Socket (DS 608842-D1)**  
230 V, 13 A



Plug Type  
K, C

Denmark, Greenland

**Socket (DS 608842-D1)**  
230 V, 13 A, EDV



Plug Type  
K EDV

Denmark, Greenland


**Socket (CEI 23-16-VII)**  
230 V, 16 A oder 10 A



Plug Type  
L, C

Italy, Chile, Cuba


**Socket (AS 3112)**  
230 V, 10 A



Plug Type  
I

Australia, New Zealand, Papua New Guinea, several Pacific Islands





**Socket (NEMA 5-15)**  
120 V, 15 A



Plug Type  
B

USA, Canada, Cuba, Ecuador, Jamaica, Japan, Mexico, Paraguay, Peru, Philippines, Taiwan, Venezuela, various Caribbean Islands

\* Power modules are only available completely assembled in EVOLine products.

Description	Picture	Order Nr. & Specifications <sup>2</sup>	/ Dock / R-Dock / Dock Square / FlipTopPush / FrameDock / One / Port / PortPush / U- & V-Dock / Up /																								
<p><b>Socket 0°, 16 A</b> <b>Contact-protected, VDE</b></p> <p>for plug type: F, C, E+F</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 0090 0000 black - black</p> <p>9330 0200 0000 black - red</p> <p>9330 5450 0000 black - white</p> <p>9331 7560 0000 white - white</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•																						
•	•	•	•	•	•																						
•	•	•	•	•	•																						
•	•	•	•	•	•																						
<p><b>Socket 0°, 16 A</b> <b>Contact-protected, VDE</b></p> <p>for plug type: F, C, E+F</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 8130 0000 black socket, plastic frame lacquered in stainless steel optics (ALANOX®)</p>	<table border="1"> <tr> <td>•</td><td></td><td></td><td></td><td></td><td></td> </tr> </table>	•																							
•																											
<p><b>Socket 60°, 16 A</b> <b>Contact-protected, VDE</b></p> <p>for plug type: F, C, E+F</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1050 0000 black - black</p> <p>9330 1430 0000 black - red</p> <p>9330 5460 0000 black - white</p> <p>9332 3700 0000 white - white</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•																						
•	•	•	•	•	•																						
•	•	•	•	•	•																						
•	•	•	•	•	•																						
<p><b>Socket 90°, 16 A</b> <b>Contact-protected, VDE</b></p> <p>for plug type: F, C, E+F</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1260 0000 black - black</p> <p>9330 1500 0000 black - red</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•												
•	•	•	•	•	•																						
•	•	•	•	•	•																						

*/ Dock / R-Dock  
 / Dock Square  
 / Flip Top Push  
 / FlameDock  
 / One  
 / Port  
 / Port Push  
 / U- & V-Dock  
 / Up*

Description	Picture	Order Nr. & Specifications <sup>2</sup>	
-------------	---------	---	--

**Socket 0°, 16 A**  
**Contact-protected, FR/BE/PL**

France, Belgium, Poland  
for plug type: E, C, E+F

Installation dimensions: 50 x 50 mm,



9330 0250 0000  
black - black

9331 1810 0000  
black - white

9331 6920 0000  
white - white

•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•

**Socket 60°, 16 A**  
**Contact-protected, FR/BE/PL**

France, Belgium, Poland  
for plug type: E, C, E+F

Installation dimensions: 50 x 50 mm,



9330 1060 0000  
black - black

9332 1650 0000  
black - white

9332 2580 0000  
white - white

•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•

**Socket 0°, 10 A / 16 A**  
**Contact-protected, IT**

Italy  
for plug type: L, C






Installation dimensions: 25 x 50 mm








9331 3180 0000  
black

•	•	•	•	•	•	•	•
---	---	---	---	---	---	---	---





<sup>2</sup> Specifications: frame colour - pot colour.  
Technical changes and printing errors reserved. | Similar pictures.  
Power modules are only available completely assembled in EVOLine products.

Description	Picture	Order Nr. & Specifications <sup>2</sup>	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /																		
<p><b>Socket 0°, 10 A</b> <b>without Contact-protection, CH</b></p> <p>Switzerland for plug type: J, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1100 0000 black - black</p> <p>9330 1480 0000 black - red</p> <p>9331 9920 0000 white - white</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td></td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•
•	•	•	•	•	•																
•	•	•		•	•																
•	•	•	•	•	•																
<p><b>Socket 0°, 16 A</b> <b>without Contact-protection, CH</b></p> <p>Switzerland for plug type: J, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1010 0000 black - black</p> <p>9330 1710 0000 black - red</p> <p>9332 1210 0000 white - white</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td></td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td></td><td></td> </tr> </table>	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•		
•	•	•	•	•	•																
•	•	•		•	•																
•	•	•	•																		
<p><b>Socket 60°, 10 A</b> <b>without Contact-protection, CH</b></p> <p>Switzerland for plug type: J, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1110 0000 black - black</p> <p>9330 1490 0000 black - red</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•						
•	•	•	•	•	•																
•	•	•	•	•	•																
<p><b>Socket 60°, 16 A</b> <b>without Contact-protection, CH</b></p> <p>Switzerland for plug type: J, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1070 0000 black - black</p> <p>9330 1450 0000 black - red</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•						
•	•	•	•	•	•																
•	•	•	•	•	•																
<p><b>Socket 270°, 10 A</b> <b>without Contact-protection, CH</b></p> <p>Switzerland for plug type: J, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1280 0000 black - black</p> <p>9330 1550 0000 black - red</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td></td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td></td><td>•</td><td>•</td> </tr> </table>	•	•	•		•	•	•	•	•		•	•						
•	•	•		•	•																
•	•	•		•	•																

*Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FlameDock  
 One  
 Port  
 Port Push  
 U- & V-Dock  
 Up*





Description	Picture	Order Nr. & Specifications <sup>2</sup>													
<p><b>Socket 270°, 16 A</b> <b>without Contact-protection, CH</b></p> <p>Switzerland for plug type: J, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1290 0000 black - black</p> <p>9330 1520 0000 black - red</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•										
•	•	•	•	•	•										
<p><b>Socket 0°, 13 A</b> <b>Contact-protected, DK</b></p> <p>Denmark, Standard for plug type: K, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1020 0000 black - black</p> <p>9332 1230 0000 white - white</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•										
•	•	•	•	•	•										
<p><b>Socket 0°, 13 A</b> <b>Contact-protected, DK</b></p> <p>Denmark, EDV-coded for plug type: K</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1030 0000 black - black</p> <p>9330 1730 0000 black - red</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•										
•	•	•	•	•	•										
<p><b>Socket 60°, 13 A</b> <b>Contact-protected, DK</b></p> <p>Denmark, Standard for plug type: K, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1080 0000 black - black</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•						
•	•	•	•	•	•										
<p><b>Socket 240°, 13 A</b> <b>Contact-protected, DK</b></p> <p>Denmark, Standard for plug type: K, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 7190 0000 black - black</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•						
•	•	•	•	•	•										

<sup>2</sup> Specifications: frame colour - pot colour.  
 Technical changes and printing errors reserved. | Similar pictures.  
 Power modules are only available completely assembled in EVOLine products.




Description	Picture	Order Nr. & Specifications <sup>2</sup>	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /
<b>Socket 0°, 13 A</b> <b>Contact-protected, GB</b>  Great Britain without fuse, for plug type: G  Installation dimensions: 50 x 50 mm		9332 0530 0000 black - black	● ● ● ● ● ● ● ● ● ●
		9332 2220 0000 white - white	● ● ● ● ● ● ● ● ● ●
<b>Socket 0°</b> <b>Contact-protected, GB</b>  Great Britain with integrated fuse for plug type: G  Installation dimensions: 50 x 50 mm		9332 0560 0000 black - black; 3,15 A	● ● ● ● ● ● ● ● ● ●
		9332 2250 0000 white - white; 3,15 A	● ● ● ● ● ● ● ● ● ●
		9332 0590 0000 black - black; 5 A	● ● ● ● ● ● ● ● ● ●
		9332 2280 0000 white white; 5 A	● ● ● ● ● ● ● ● ● ●
<b>Socket 45°, 13 A</b> <b>Contact-protected, GB</b>  Great Britain without fuse, for plug type: G  Installation dimensions: 50 x 50 mm		9332 0540 0000 black - black	● ● ● ● ● ● ● ● ● ●
		9332 2230 0000 white - white	● ● ● ● ● ● ● ● ● ●
<b>Socket 45°</b> <b>Contact-protected, GB</b>  Great Britain with integrated fuse for plug type: G  Installation dimensions: 50 x 50 mm		9332 0570 0000 black - black; 3,15 A	● ● ● ● ● ● ● ● ● ●
		9332 2260 0000 white - white; 3,15 A	● ● ● ● ● ● ● ● ● ●
		9332 0600 0000 black - black; 5 A	● ● ● ● ● ● ● ● ● ●
		9332 2290 0000 white - white; 5 A	● ● ● ● ● ● ● ● ● ●

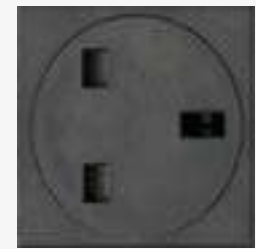

*Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 One  
 Port  
 Port Push  
 U- & V-Dock  
 Up*

Description	Picture	Order Nr. & Specifications <sup>2</sup>						
<p><b>Socket 90°, 13 A</b> <b>Contact-protected, GB</b></p> <p>Great Britain without fuse, for plug type: G</p> <p>Installation dimensions: 75 x 50 mm incl. spacer plate: 25 mm</p>		<p>9330 4430 9000 black - black</p>	●		● ●	●		●
<p><b>Socket 90°</b> <b>Contact-protected, GB</b></p> <p>Great Britain with integrated fuse for plug type: G</p> <p>Installation dimensions: 75 x 50 mm incl. spacer plate: 25 mm</p>		<p>9330 4450 9000 black - black; 3,15 A</p> <p>9330 4470 9000 black - black; 5 A</p>	●		● ●	●		●
<p><b>Socket 225°, 13 A</b> <b>Contact-protected, GB</b></p> <p>Great Britain without fuse, for plug type: G</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9332 2750 0000 black - black</p> <p>9332 3810 0000 white - white</p>	●			●		●
<p><b>Socket 225°</b> <b>Contact-protected, GB</b></p> <p>Great Britain with integrated fuse for plug type: G</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9332 2760 0000 black - black; 3,15 A</p> <p>9332 3820 0000 white - white; 3,15 A</p> <p>9332 2770 0000 black - black; 5 A</p> <p>933238300000 white - white; 5 A</p>	●			●		●
			●			●		●
			●			●		●
			●			●		●

<sup>2</sup> Specifications: frame colour - pot colour.  
 Technical changes and printing errors reserved. | Similar pictures.  
 Power modules are only available completely assembled in EVOLine products.

Description	Picture	Order Nr. & Specifications <sup>2</sup>	/ Dock / R-Dock / Dock Square / FlipTop Push / FramePush / One / Port / Port Push / U- & V-Dock / Up /
<b>Socket 0°, 10 A</b> <b>without Contact-protection, AUS</b>		9330 5240 0000 black - black	• • • • • •
Australia for plug type: I  Installation dimensions: 50 x 50 mm		9330 5270 0000 black - red	• • • • • •
<b>Socket 270°, 10 A</b> <b>without Contact-protection, AUS</b>		9330 5890 0000 black - black	• • •
Australia for plug type: I  Installation dimensions: 50 x 50 mm		9330 4010 0000 black - black	•
<b>Socket 0°, 10 A Angled Outlet</b> <b>without Contact-protection, AUS</b>		9330 4400 0000 black - red	•
Australia for plug type: I, Not suitable for angled plugs.  Installation dimensions: 75 x 50 mm			

*Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 One  
 Port  
 Port Push  
 U- & V-Dock  
 Up*

Description

Picture

Order Nr. & Specifications<sup>2</sup>

**Socket 0°, 15 A  
with Contact-protection,  
USA/ CAN**

USA, Canada  
for plug type: B

Installation dimensions: 50 x 50 mm



9332 3640 6600  
black - black

**Socket 60°, 15 A  
with Contact-protection,  
USA/ CAN**

USA, Canada  
for plug type: B

Installation dimensions: 50 x 50 mm



9332 3650 6600  
black - black


**Socket 0°, 15 A  
Angled Outlet  
with Contact-protection and hinged  
lid, USA/CAN**

USA, Canada  
for plug type: B  
Not suitable for angled plugs.

Installation dimensions: 75 x 50 mm




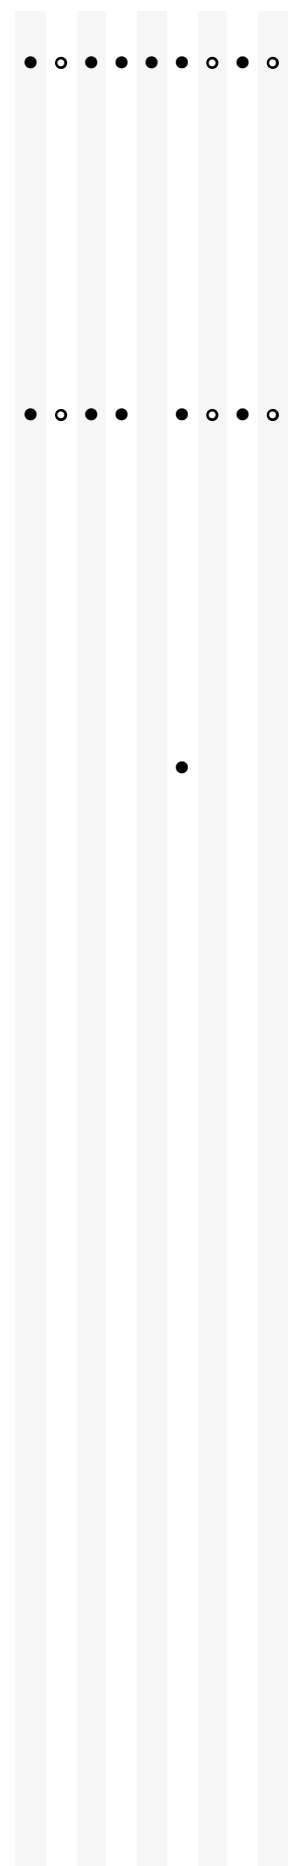


9332 3630 6600  
black - black



○ No UL-listed product. Feasibility to be enquired individually.

<sup>2</sup> Specifications: frame colour - pot colour.  
Technical changes and printing errors reserved. | Similar pictures.  
Power modules are only available completely assembled in EVOLine products.

Description	Picture	Order Nr. & Specifications <sup>2</sup>	Dock / R-Dock Dock Square FlipTop Push FrameDock One Port Port Push U- & V-Dock Up																				
<p><b>Connector 16 A</b></p> <p>Snap-In for current output</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>Powered by GST18 (socket) 9330 8990 0000 black</p> <p>WAGO WINSTA MIDI (socket) 9330 8970 0000 black</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•														
•	•	•	•	•	•	•	•	•	•														
<p><b>USB-A Charger</b></p> <p>USB Type A Charger, charging function only. Supply voltage: 100-240 VAC</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9332 5460 0000 5 V / 2,1 A max., black</p> <p>9332 5460 0000 5 V / 2,1 A max., white</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•														
•	•	•	•	•	•	•	•	•	•														
<p><b>USB-C Charger</b></p> <p>USB Type C Charger, charging function only. Supply voltage: 100-240 VAC</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9332 5470 0000 5 V / 2,1 A max., black</p> <p>9332 5470 0000 5 V / 2,1 A max., white</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•														
•	•	•	•	•	•	•	•	•	•														
<p><b>USB-AC Charger</b></p> <p>USB Type A and Type C Charger, charging function only. Supply voltage: 100-240 VAC</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9332 5620 0000 5 V / 2,1 A max., black</p> <p>9332 5620 0000 5 V / 2,1 A max., white</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•														
•	•	•	•	•	•	•	•	•	•														

Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 One  
 Port  
 Port Push  
 U- & V-Dock  
 Up

Description

Picture

Order Nr. & Specifications<sup>2</sup>

**USB-AC Charger 30 W**

USB socket, type A and type C, charging function only.

USB A QC 3.0 (Quick Charge) connection:  
 5 V / 3 A (15 W); 9 V / 3 A (27 W); 12 V / 2,5 A (30 W); 20 V / 1,5 A (30 W)

USB C PD (Power Delivery) connection:  
 5 V / 3 A (15 W); 9 V / 3 A (27 W); 12 V / 2,5 A (30 W); 15 V / 2 A (30 W); 20 V / 1,5 A (30 W)


Maximum total power, individually occupied: 30 W

USB A + C:  
 5 V / 2.4 A (12 W) max.  
 Maximum total power, double occupancy: 24 W

Overcharge, deep discharge, overload and short-circuit protection  
 Installation dimension 50 × 50 mm



9332 7310 0000  
 black

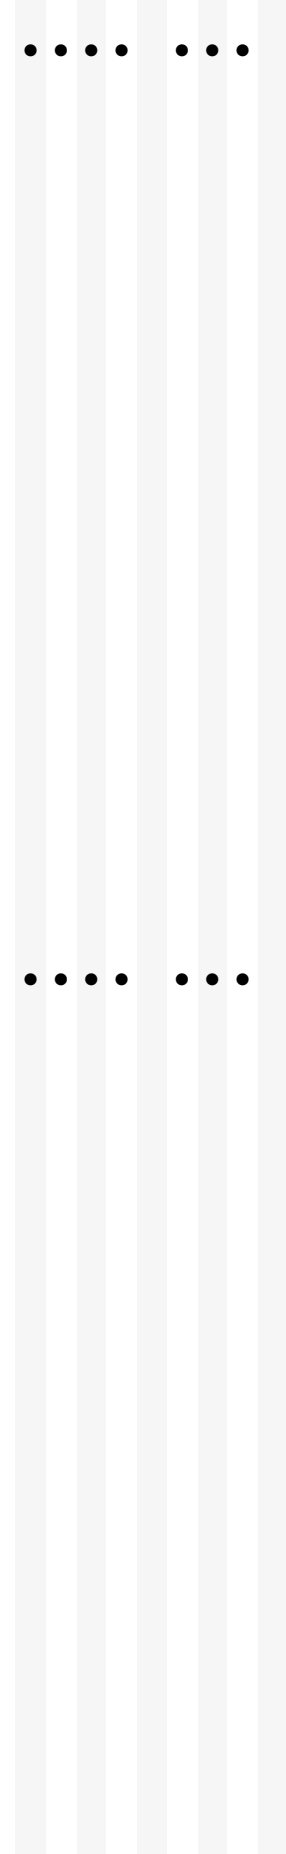

**USB-AC Charger 65 W**

USB socket, type A and type C, charging function only.

USB A QC 3.0 (Quick Charge) connection:  
 5 V / 3 A (15 W); 9 V / 2 A (18 W). 12 V / 1.5 A (18 W)

USB C PD (Power Delivery) connection:  
 5 V / 3 A (15 W); 9 V / 3 A (27 W). 12 V / 3 A (36 W); 15 V / 3 A (45 W); 20 V / 3.25 A (65 W)


Maximum total power, individually connected: 65 W

USB A + C:  
 5 V / 2.2 A (11 W) max.  
 maximum total power, double occupancy: 22 W

Overcharge, deep discharge, overload and short-circuit protection  
 Installation dimension 50 × 50 mm



9332 7320 0000  
 black

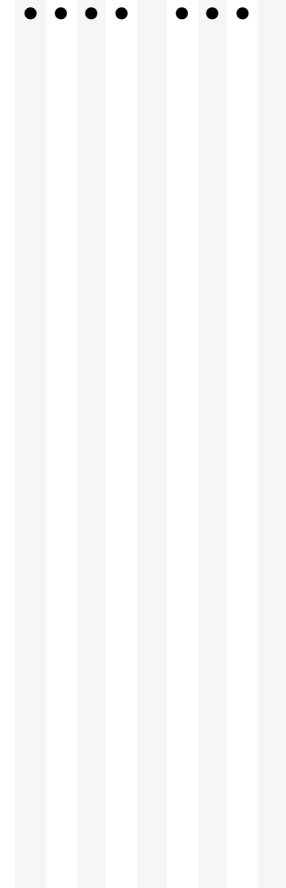




<sup>2</sup> Specifications: frame colour - pot colour.  
 Technical changes and printing errors reserved. | Similar pictures.  
 Power modules are only available completely assembled in EVOLine products.

# EVoline® Power supply modules





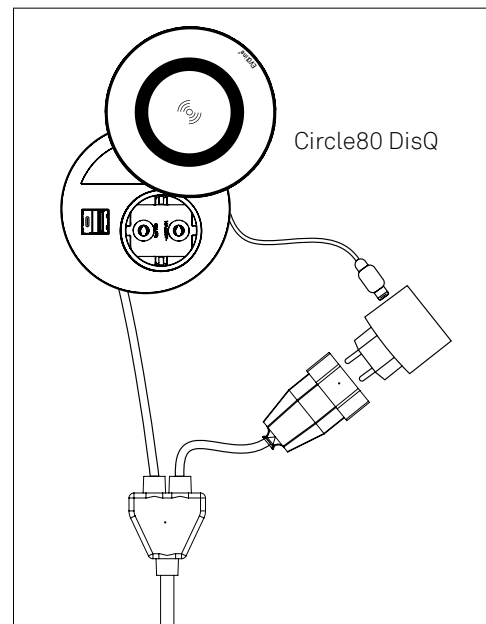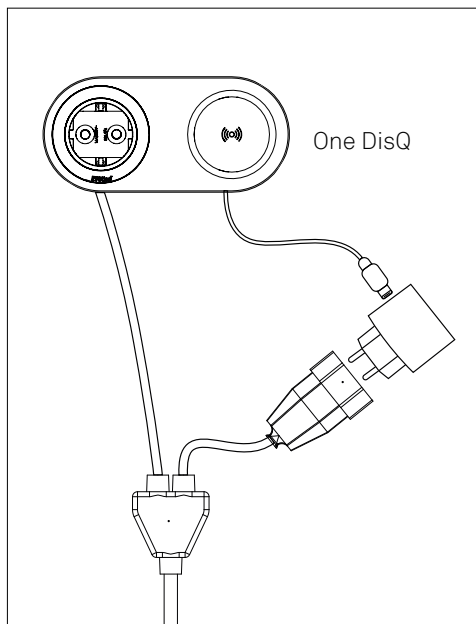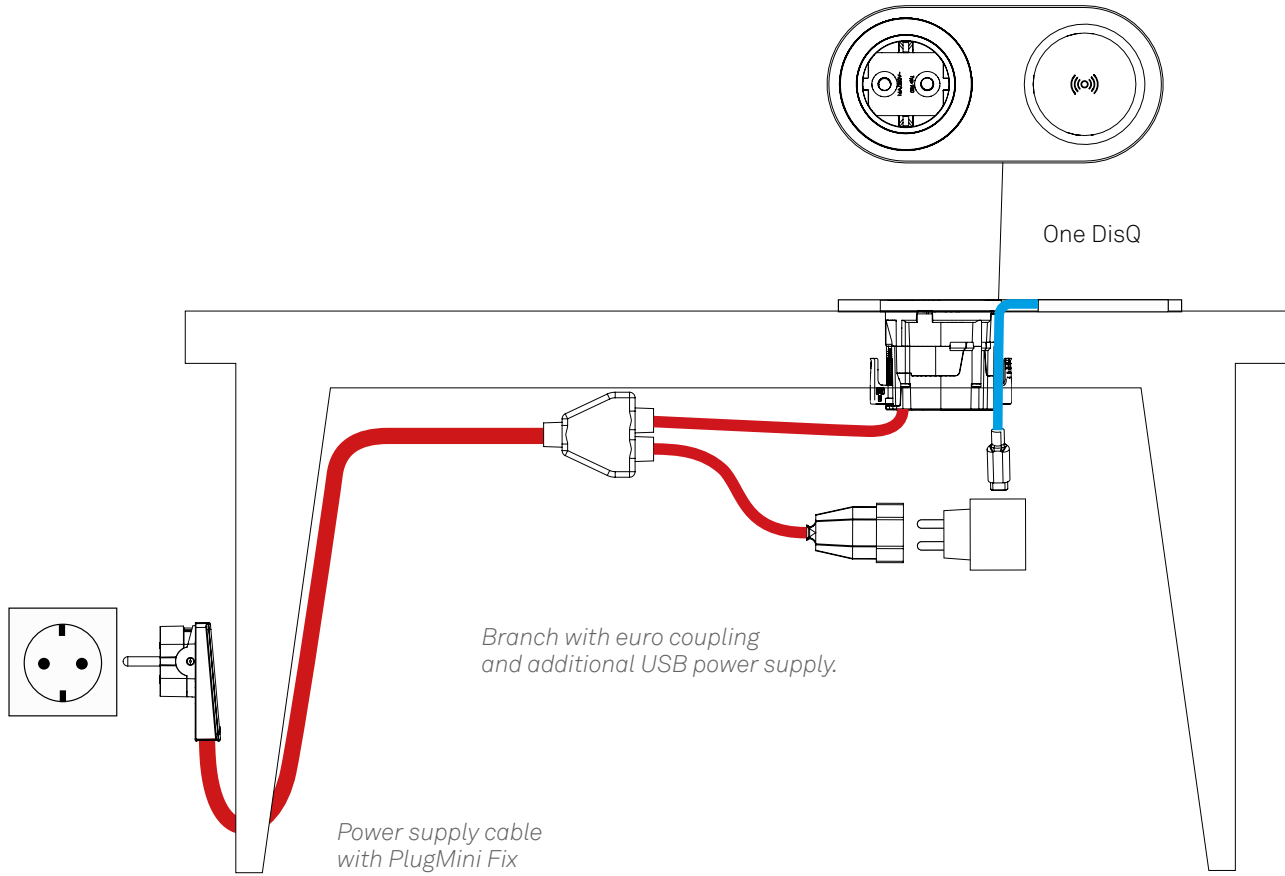

*Installation example:*

*Power supply module with cable,  
PlugMini Fix and branch with euro  
coupling, mounted on the OneDisQ.  
With additional power supply unit.*








# EVOLine® Power supply modules

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / Flip Square / Flip Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up
<p><b>Power Supply Module with cable and EVOLine PlugFix</b></p> <p>Type E+F i.e. Germany 16 A, 3 x 1.5 mm<sup>2</sup> Plug with extra low profile and movable plug face.</p>		<p>9331 0890 0000 Cable length 3 m, black</p> <p>9331 5510 0000 Cable length 3 m, white</p> <p>Branch with Euro coupling Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p>
<p><b>Power Supply Module with cable and EVOLine PlugMini</b></p> <p>Connector type E + F i.e. Germany 16 A, 3 x 1.5 mm<sup>2</sup> Extra small and ultra-low profile grounded plug with movable face.</p>		<p>9332 4800 0000 Cable length 3 m, black</p> <p>9332 4810 0000 Cable length 3 m, white</p> <p>Branch with Euro coupling Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p>
<p><b>Power Supply Module with cable and angled plug</b></p> <p>Type E+F i.e. Germany, France, Belgium, Poland 16 A, 3 x 1.5 mm<sup>2</sup></p>		<p>9330 2020 0000 Cable length 3 m, black</p> <p>9332 2670 0000 Cable length 3 m, white</p> <p>Cable extension per meter</p>	<p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p>
<p><b>Power Supply Module with cable and plug</b></p> <p>Type J 3 x 1,5 mm<sup>2</sup> i.e. Switzerland</p>		<p>9330 2030 0000 10 A, Cable length 3 m, black</p> <p>9332 5370 0000 10 A, with fine-wire fuse, Cable length 3 m, black</p> <p>9330 2040 0000 16 A, Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p>






Technical changes and printing errors reserved. | Similar pictures.



Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FlameDock / One / Port / Port Push / U- & V-Dock / Up
<p><b>Power Supply Module with Cable and Overload Circuit Breaker</b></p> <p>Plug type J (T12)                      Power Supply Module with resettable overload switch 10 A                      3x 1,5 mm<sup>2</sup></p>		<p>9332 1090 0000                      Cable length 3 m, black, mounted to product</p> <p>Cable extension per meter</p>	<p>● ● ● ● ● ● ● ● ●</p> <p>● ● ● ● ● ● ● ● ●</p>
<p><b>Power Supply Module with cable and angled plug</b></p> <p>Type G,                      i.e. Great Britain 13 A, 3 x 1,5 mm<sup>2</sup></p>		<p>9330 2070 0000                      Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>● ● ● ● ● ● ● ● ●</p> <p>● ● ● ● ● ● ● ● ●</p>
<p><b>Power Supply Module with cable and angled plug</b></p> <p>Type K                      13 A, 3 x 1,5 mm<sup>2</sup> Denmark. Standard</p>		<p>9330 2050 0000                      Cable length 3 m, black</p> <p>9330 2060 0000                      Plug, not angled, EDP-coded, Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>● ● ● ● ● ● ● ● ●</p> <p>● ● ● ● ● ● ● ● ●</p> <p>● ● ● ● ● ● ● ● ●</p>
<p><b>Power Supply Module with cable and Plug</b></p> <p>Plug Type L                      i.e. Italy                      16 A, 3 x 1,5 mm<sup>2</sup></p>		<p>9330 2080 0000                      Cable length 3 m, black</p> <p>Branch with Euro coupling                      Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>● ● ● ● ● ● ● ● ●</p> <p>● ● ● ● ● ● ● ● ●</p> <p>● ● ● ● ● ● ● ● ●</p>
<p><b>Power Supply Module with cable and Plug</b></p> <p>Type B                      115 V. 15 A, AWG 14                      i.e. USA, Canada (UL/CSA)</p>		<p>9330 9160 6600                      Cable length 3 m, black</p> <p>Cable extension on request</p>	<p>● ○ ○ ● ○ ● ○ ● ○</p> <p>● ● ● ● ● ● ● ● ●</p>

Technical changes and printing errors reserved. | Similar pictures.

# EVoline® Power supply modules

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / / Dock Square / / FlipTopPush / / FrameDock / / One / / Port / / PortPush / / U- & V-Dock / / Up /
<b>Power Supply Module with cable and Plug</b>		9330 9130 0000 Cable length 3 m, black  Cable extension on request	● ● ● ● ● ● ● ● ●
Type B 10 A, 3 × 1,5 mm <sup>2</sup> i.e. Australia			
<b>Power Supply Module with cable and ferrules</b>		9330 9510 0000 Cable length 3 m, black  Branch with Euro coupling Cable length 3 m, black  Cable extension per meter	● ●
16 A, 3 × 1,5 mm <sup>2</sup>			
<b>Power Supply Module with cable and connector</b>		9330 8420 0000 Plug Powered by GST18 without lock  9331 2490 0000 Plug Powered by GST18 with lock  Branch with Euro coupling Cable length 3 m, black  Cable extension per meter	● ●
16 A, 3 × 1,5 mm <sup>2</sup> Cable length 3 m Colour: black			
		9332 6170 0000 Plug Powered by GST15 (Mini) with lock  Branch with Euro coupling Cable length 3 m, black  Cable extension per meter	● ●
		9330 8440 0000 Plug WAGO WINSTA MIDI without lock  Branch with Euro coupling Cable length 3 m, black  Cable extension per meter	● ●

Technical changes and printing errors reserved. | Similar pictures.

Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 One  
 Port  
 Port Push  
 U- & V-Dock  
 Up

Description	Picture	Order Nr. & Specifications												
<b>Power Output Module with cable and connector</b>		9332 1940 0000 Plug WAGO WINSTA MINI without lock	•	•	•	•	•	•	•	•	•	•	•	•
		Branch with Euro coupling Cable length 3 m, black	•	•	•	•	•	•	•	•	•	•	•	•
		Cable extension per meter	•	•	•	•	•	•	•	•	•	•	•	•
16 A, 3 × 1,5 mm <sup>2</sup> Cable length 3 m Colour: black		9330 5810 0000 Socket Powered by GST18 without lock	•	•	•	•			•	•	•			
		9331 2500 0000 Socket Powered by GST18 with lock	•	•	•	•			•	•	•			
		9332 6180 0000 Socket Powered by GST15 (Mini) with lock	•	•	•	•			•	•	•			
		9330 5830 0000 WAGO WINSTA MIDI socket without lock	•	•	•	•			•	•	•			
<b>Connector 3-pole Plug</b>		9330 2680 0000 Plug Powered by GST18	•	•		•						•		
Installed in the end cap Colour: black		9330 2660 0000 Plug WAGO WINSTA MIDI	•	•		•						•		
<b>Connector 3 pole Socket</b>		9330 8960 0000 Socket Powered by GST18	•	•		•						•		
Snap-In, installed in the end cap Colour: black		9330 8940 0000 Socket WAGO WINSTA MIDI	•	•		•						•		

Technical changes and printing errors reserved. | Similar pictures.

# EVoline® USB power supplies & connection cables

Description

Picture

Specifications

Order Number

## Power supply 65 W\* with euro plug

Entrance:  
100 - 240 V AC, 50/60 Hz

Output I:  
USB-A connection: 5 V / 2.1 A (10.5W)

Output II:  
USB-C Power Delivery connection:  
5 V / 3 A (15 W); 9 V / 3 A (27 W);  
12 V / 3 A (36 W); 15 V / 3 A (45 W);  
20 V / 3.25 A (65 W)

Capable of charging two devices at  
the same time (USB-C port and  
2.1 A USB-A port),  
maximum 65 W total power.

Overcharge, deep discharge, over-  
load and short circuit protection

Colour: black

Dimensions: 107 x 70 x 29 mm



6599 0912 3900

## Power supply 65 W\* with 2 x USB C and euro plug

Entrance:  
100 - 240 V AC, 50/60 Hz

Output I & II single:  
USB-C Power Delivery connection:  
5 V / 3 A (15 W); 9 V / 3 A (27 W);  
12 V / 3 A (36 W); 15 V / 3 A (45 W);  
20 V / 3,25 A (65 W)

Output I & II together:  
USB-C Power Delivery connection:  
45 W + 20 W or 20 W + 45 W

Capable of charging two devices at  
the same time (2x USB-C port),  
maximum 65 W total power.

Overcharge, deep discharge, over-  
load and short circuit protection

Colour: white

Dimensions: 93 x 55 x 33 mm



6599 0913 2200

\* The power supply generally charges all common products. Due to the large number of the function cannot be guaranteed in every case for providers and devices.

Contents subject to printing errors, rights reserved to implement technical changes at any time | Photo images indicative only.

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**Power supply 20 W\*  
with euro plug**

Entrance:  
100 - 240 V AC, 50/60 Hz

Output I:  
USB-A Quick Charge connection:  
5 V / 3.0 A (15 W)

Output II:  
USB-C Power Delivery connection:  
5 V / 3 A (15 W); 9 V / 2,22 A (20 W);  
12 V / 1,67 A (20 W)

Capable of charging two devices at the same time (USB-C port and USB-A port), maximum 20 W total power.  
Overcharge, deep discharge, over-load and short circuit protection  
Colour: black

Dimensions: 69 x 45 x 45 mm



6599 0913 0900

**Universal power supply 30 W \*  
with international plug adapters**

US, AU / CN, UK and EU plugs

Entrance:  
100 - 240 V AC, 50/60 Hz

Output I:  
USB-A Quick Charge connection:  
5 V / 3 A (15 W); 9 V / 3 A (27 W)  
12 V / 2,5 A (30 W); 20 V / 1,5 A (30 W)

Output II:  
USB-C Power Delivery connection:  
5 V / 3 A (15 W); 9 V / 3 A (27 W),  
12 V / 2,5 A (30 W); 15 V / 2 A (30 W)  
20 V / 1,5 A (30 W)

Capable of charging two devices at the same time (USB-C port and A USB-A port), maximum 30 W total power.

Overcharge, deep discharge, over-load and short circuit protection  
Colour: black



Dimensions: 97 x 44 x 36 mm






1599 0913 2000

\* The power supply generally charges all common products. Due to the large number of the function cannot be guaranteed in every case for providers and devices.

# EVoline® USB power supplies & connection cables






Description	Picture	Specifications	Order Number
<p><b>USB C charging cable</b></p> <p>Connector C - Connector C supports Power Delivery (PD3) up to 100 W E-Marker chip for 20 V / 5 A colour: black Length: 1 m</p>			6599 0912 5600
<p><b>USB A 3.0 charging and data cable</b></p> <p>Plug A - Plug A up to USB SuperSpeed: 10 V / 2.1 A Data transmission: up to 5 Gbit/s colour: black Length: 1 m</p>			6599 0912 6800







Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / FrameDock Hide / Port / Port Push / U- & V-Dock / Up /																				
<p><b>RJ45 Data Connector</b> <b>Reichle &amp; De-Massari</b></p> <p>with Cable and Plug / Socket</p> <p>Installation Dimensions: 25 x 50 mm</p>		<p>9331 2150 0000 RJ45 CAT6 shielded 0.2 m Cable, Socket</p> <p>9330 8270 0000 RJ45 CAT6 unshielded 3 m Cable, Plug</p> <p>9330 7860 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 0020 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p>	<table border="1"> <tr> <td>●</td> <td>●</td> <td>●</td> <td></td> <td></td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td></td> <td></td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td></td> <td></td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td></td> <td></td> </tr> </table>	●	●	●			●	●	●			●	●	●			●	●	●		
●	●	●																					
●	●	●																					
●	●	●																					
●	●	●																					
<p><b>RJ45 Data Connector</b> <b>Reichle &amp; De-Massari</b></p> <p>Angled Outlet with labeling field with Cable and Plug</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9331 8200 0000 RJ45 CAT6 shielded 0.2 m Cable, Socket (RJ45)</p> <p>9331 0010 0000 RJ45 CAT6 unshielded 3 m Cable, Plug</p> <p>9330 6140 0000 RJ45 CAT6 shielded 3 m Cable Plug</p> <p>9331 0030 0000 RJ45 CAT6A shielded 3 m Cable Plug</p>	<table border="1"> <tr> <td></td> <td></td> <td>●</td> <td>●</td> <td></td> </tr> <tr> <td></td> <td></td> <td>●</td> <td>●</td> <td></td> </tr> <tr> <td></td> <td></td> <td>●</td> <td>●</td> <td></td> </tr> <tr> <td></td> <td></td> <td>●</td> <td>●</td> <td></td> </tr> </table>			●	●				●	●				●	●				●	●	
		●	●																				
		●	●																				
		●	●																				
		●	●																				
<p><b>2x RJ45 Data Connector</b> <b>Reichle &amp; De-Massari</b></p> <p>Angled Outlet with labeling field with Cable and Plug / Socket</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9331 2590 0000 RJ45 CAT6 shielded 0.2 m Cable, Socket (RJ45)</p> <p>9330 4340 0000 RJ45 CAT6 unshielded 3 m Cable, Plug</p> <p>9330 1230 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 0040 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p>	<table border="1"> <tr> <td></td> <td></td> <td>●</td> <td>●</td> <td></td> </tr> <tr> <td></td> <td></td> <td>●</td> <td>●</td> <td></td> </tr> <tr> <td></td> <td></td> <td>●</td> <td>●</td> <td></td> </tr> <tr> <td></td> <td></td> <td>●</td> <td>●</td> <td></td> </tr> </table>			●	●				●	●				●	●				●	●	
		●	●																				
		●	●																				
		●	●																				
		●	●																				



Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 FrameDock Hide  
 Port  
 Port Push  
 U- & V-Dock  
 Up

Description	Picture	Order Nr. & Specifications	
<p><b>RJ45 Modular Adaptor ELBRO</b></p> <p>Modular Adaptor , 1:1 intercon- nected</p> <p>Installation Dimensions: 25 x 50 mm</p>		<p>9330 8410 0000 (RJ45) CAT6 shielded</p> <p>9331 4080 0000 (RJ45) CAT6A shielded</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
<p><b>RJ45 Modular Adaptor ELBRO</b></p> <p>Angled Outlet with labeling field. Modular Adaptor, 1:1 interconnected</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9330 5880 0000 (RJ45) CAT6 shielded</p> <p>9331 4090 0000 (RJ45) CAT6A shielded</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
<p><b>2x RJ45 Modular Adaptor ELBRO</b></p> <p>Angled Outlet with Labeling Field Modular Adaptor, 1:1 interconnected</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9330 3920 0000 (RJ45) CAT6 shielded</p> <p>9331 4100 0000 (RJ45) CAT6A shielded</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
<p><b>2x RJ45 Modular Adaptor ELBRO</b></p> <p>Modular Adaptor, 1:1 interconnected Angled: 90°</p> <p>Installation Dimensions: 25 x 50 mm</p>		<p>9331 4870 0000 (RJ45) CAT6 shielded</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
			

Technical changes and printing errors reserved. | Similar pictures.

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / FrameDock Hide / Port / Port Push / U- & V-Dock / Up /
<p><b>VGA-Connector</b></p> <p>15 pole HDD socket with screw terminals, Installation dimensions: 25 x 50 mm</p>		<p>9330 0810 0000 with 3 m cable and plug</p>	<p>•      •      •</p>
<p><b>VGA-Connector</b></p> <p>Angled outlet with labeling field 15 pole HDD socket with screw terminals, Installation dimensions: 50 x 50 mm</p>		<p>9330 2370 0000 with 3 m cable and plug</p>	<p>•      •</p>
<p><b>VGA- and Audio Connector</b></p> <p>1x VGA Connector. 15 pole HDD socket with screw terminals, 1x Stereo Jack socket 3.5 mm Installation dimensions: 25 x 50 mm</p>		<p>9330 7920 0000 with 3 m cables and plugs</p>	<p>•      •      •</p>
<p><b>VGA and Audio Connector</b></p> <p>Angled outlet with labeling field 1x VGA Connector, 15 pole HDD socket, with screw terminals. 1x Stereo Jack socket 3.5mm Installation dimensions: 50 x 50 mm</p>		<p>9331 5370 0000 with 3 m cables and plugs</p>	<p>•      •</p>

Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 FrameDock Hide  
 Port  
 Port Push  
 U- & V-Dock  
 Up

Description

Picture


Order Nr. & Specifications

**Audio Connector 3.5mm**

1 x Stereo Jack socket 3.5 mm  
 Installation dimensions: 25 x 50 mm



9330 0910 0000  
 with 3 m cable and plug

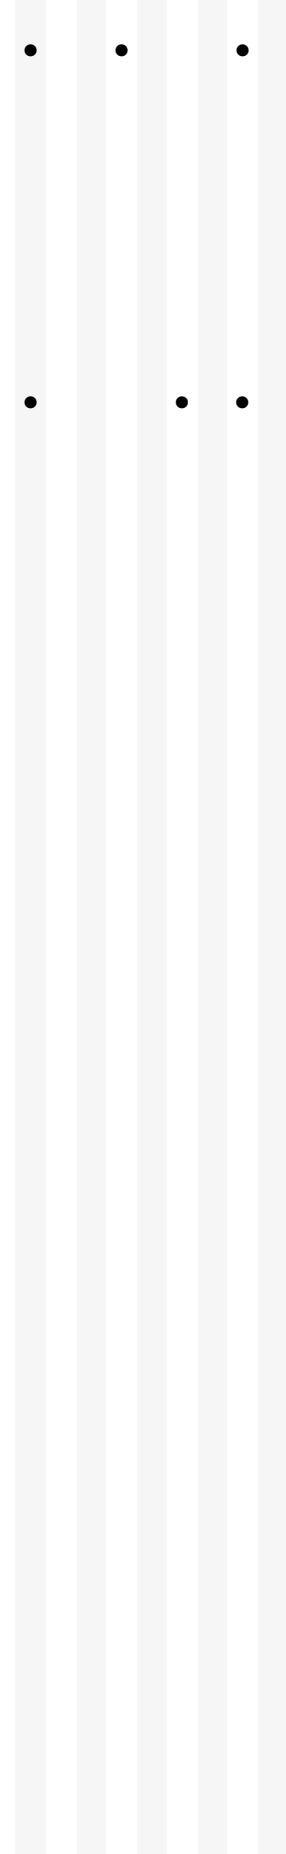

**Audio Connector 3.5mm**



Angled outlet with labeling field.  
 1 x Stereo Jack socket 3.5 mm  
 Installation dimensions: 50 x 50 mm









9330 2460 0000  
 with 3 m cable and plug





Description	Picture	Order Nr. & Specifications	<i>/ Dock / R-Dock</i> <i>/ Dock Square</i> <i>/ FlipTop Push</i> <i>/ FrameDock</i> <i>/ FrameDock Hide</i> <i>/ Port</i> <i>/ Port Push</i> <i>/ U- &amp; V-Dock</i> <i>/ Up</i>
<p><b>HDMI-Connector</b></p> <p>HDMI connector with gilded contacts. Installation dimensions: 25 x 50 mm</p>		<p>9331 8940 0000 HDMI 2.0 connector with 0.2 m Cable and Socket</p> <p>9332 2800 0000 HDMI 2.0 connector with 3 m Cable and Plug</p>	<p>• •</p> <p>• •</p>
<p><b>HDMI-Connector</b></p> <p>Angled outlet with labeling field HDMI connector with gilded contacts. Installation dimensions: 50 x 50 mm</p>		<p>9331 8950 0000 HDMI 2.0 connector with 0.2 m Cable and Socket</p> <p>9332 2810 0000 HDMI 2.0 connector with 3 m Cable and Plug</p>	<p>• •</p> <p>• •</p>
<p><b>DisplayPort-Connector</b></p> <p>for digital signals DP 1.2 compliant. Installation dimensions: 25 x 50 mm</p>		<p>9331 7510 0000 with 0.4 m Cable and Socket</p>	<p>• •</p>
<p><b>DisplayPort-Connector</b></p> <p>Angled outlet with labeling field for digital signals DP 1.2 compliant. Installation dimensions: 50 x 50 mm</p>		<p>9331 7520 0000 with 0.4 m Cable and Socket</p>	<p>• •</p>

Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 FrameDock Hide  
 Port  
 Port Push  
 U- & V-Dock  
 Up

Description	Picture	Order Nr. & Specifications	●	●	●	●	●
<p><b>USB A Connector</b></p> <p>For data connection commercially available USB devices.</p> <p>USB 3.0: max. 5 Gbit/s data</p> <p>Installation dimension: 25 × 50 mm</p>		<p>9331 8620 0000 0.2 m Cable and Socket</p> <p>9331 1450 0000 1 m USB Cable Plug USB 3 Type A</p> <p>9331 1460 0000 3 m USB Cable Plug USB 3 Type A</p>	●	●		●	
<p><b>USB A Connector</b></p> <p>For data connection commercially available USB devices.</p> <p>USB 3.0: max. 5 Gbit/s data</p> <p>Angled outlet with labelling field.</p> <p>Installation dimension: 50 × 50 mm</p>		<p>9331 8630 0000 0.2 m Cable and Socket</p> <p>9331 1460 0000 1 m USB Cable, Plug USB 3 Type A</p> <p>9331 1460 0000 3 m USB Cable Plug USB 3 Type A</p>			●	●	




Description	Picture	Order Nr. & Specifications	Dock / R-Dock Dock Square FlipTop Push FrameDock FrameDock Hide Port Port Push U- & V-Dock Up
<p><b>USB C Connector</b></p> <p>Suitable for power and data supply.                      USB PD (Power Delivery):                      5 A / max. 100 watts</p> <p>USB 3.1 Gen2:                      max. 10 Gbit/s data</p> <p>Installation dimension: 25 × 50 mm</p>		<p>9332 6390 0000                      1 m cable with USB plug</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> </div>
<p><b>USB C Connector</b></p> <p>Suitable for power and data supply.                      USB PD (Power Delivery):                      5 A / max. 100 watts</p> <p>USB 3.1 Gen2:                      max. 10 Gbit/s data</p> <p>Installation dimension: 50 × 50 mm</p>		<p>9332 6410 0000                      1 m cable with USB plug</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 35%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 35%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> </div>
<p><b>2x USB C Connector</b></p> <p>Suitable for power and data supply.                      USB PD (Power Delivery):                      5 A / max. 100 watts</p> <p>USB 3.1 Gen2:                      max. 10 Gbit/s data</p> <p>Installation dimension: 50 × 50 mm</p>		<p>9332 6420 0000                      1 m cable with USB plug</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 35%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 35%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> </div>

Description	Picture	Order Nr. & Specifications	
<p><b>Audio Connector and stainless steel push-button with ring LED</b></p> <p>1x Stereo Jack Socket 3.5 mm                      1x Push-Button                      Operating voltage: 24 V<sub>AC/DC</sub>                      Operating current: 10 mA                      Angled outlet and labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 9490 0000</p> <p><b>Audio</b>                      Stereo Jack Socket 3.5 mm                      with 3 m Cable                      and Plug 3.5 mm</p> <p><b>Push-Button</b>                      with 3 m Cable without plug</p>	<p>• •</p>
<p><b>Audio Connector and Data Socket Reichle &amp; De-Massari Cat. 6</b></p> <p>1x Stereo Jack socket 3.5 mm                      1x Data Socket with cable                      Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 7610 0000</p> <p><b>Audio</b>                      Stereo Jack Socket 3.5 mm                      with 3 m Cable                      and Plug 3.5 mm</p> <p><b>Data</b>                      RJ45 Cat. 6 Socket                      with 3 m Cable, shielded and                      RJ45 Plug</p>	<p>• •</p>
<p>Audio Connector and Data Socket Elbro</p> <p>1x Cat.6 Modular-Adaptor, shielded                      1x Stereo Jack socket 3.5 mm                      Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 7800 0000</p> <p><b>Audio</b>                      Stereo Jack Socket 3.5 mm                      with 3 m Cable                      and Plug 3.5 mm</p> <p><b>Data</b>                      Modular-Adaptor RJ45                      (without Cable)</p>	<p>• •</p>






Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FramePush / FrameDock / Port / Port Push / U- & V-Dock / Up /																																
<p><b>Cable Outlet Module</b></p> <p>1 cable passage Colour: black</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 3790 0000 Ø 8 mm</p> <p>9331 0560 0000 Ø 12 mm</p> <p>9331 1670 0000 Ø 17 mm</p> <p>Additional diameters on demand</p>	<table border="1"> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> </table>	●	●	●	●	●	●	●	●	●	●	●	●																				
●	●	●	●																																
●	●	●	●																																
●	●	●	●																																
<p><b>Cable Outlet Module</b></p> <p>2 cable passages Colour: black</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 3800 0000 Ø 8 mm</p> <p>9331 1930 0000 Ø 12 mm</p> <p>Additional diameters on demand</p>	<table border="1"> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> </table>	●	●	●	●	●	●	●	●																								
●	●	●	●																																
●	●	●	●																																
<p><b>Cable Guide Module</b></p> <p>Clamp for 3 cables 2x 8 mm 1x 12 mm Colour: black</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9331 3600 0000 Holder for 3 Cables for mounting in the profile</p> <p>1599 0912 8700 Holder for 3 Cables with 2 holes for screwing</p>	<table border="1"> <tr> <td></td> <td></td> <td></td> <td>●</td> </tr> </table>				●																												
			●																																
<p><b>Cable assortment</b></p> <p>3.0 m cables 2 plugs</p> <p>cable extension and variations available on request</p>		<p>9332 6040 0000 HDMI 2.0 Cable</p> <p>9331 3060 0000 VGA Cable</p> <p>9331 3720 0000 Audio Stereo Cable</p> <p>9331 1060 0000 PatchCable CAT6, shielded</p> <p>9331 9810 0000 USB 3.0 Cable (Type A)</p>	<table border="1"> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> </table>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●																												
●	●	●	●	●	●	●	●																												
●	●	●	●	●	●	●	●																												
●	●	●	●	●	●	●	●																												



Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 FrameDock Hide  
 Port  
 Port Push  
 U- & V-Dock  
 Up

Description	Picture	Order Nr. & Specifications					
<b>Installation Space</b>		9330 7990 0000 Profile length: 15 mm	●	●	●	●	
Profile with black plastic cover to enable later insertation of additional modules.		9330 5620 0000 Profile length: 25 mm	●	●	●	●	
		9330 5630 0000 Profile length: 50 mm	●	●	●	●	
		9330 5640 0000 Profile length: 75 mm	●	●	●	●	
		9330 5650 0000 Profile length: 100 mm	●	●	●	●	
		9330 6390 0000 Profile length: 150 mm	●	●	●	●	
		9330 9000 0000 black	●	●	●	●	●
<b>Labeling Field</b>		9330 9000 0000 black	●	●	●	●	●
For individual labeling of modules.		Installation dimensions: 15 x 50 mm	●	●	●	●	●
<b>Cover Plate</b>		9330 0150 0000 Dimensions: 5 x 50 mm	●	●	●	●	●
made of black plastic, provides distance between current modules, future changes are not possible		9330 7980 0000 Dimensions: 15 x 50 mm	●	●	●	●	●
		9330 0920 0000 Dimensions: 25 x 50 mm	●	●	●	●	●
		9330 0130 0000 Dimensions: 50 x 50 mm	●	●	●	●	●
		9330 0550 0000 Dimensions: 75 x 50 mm	●	●	●	●	●
		9330 0110 0000 Dimensions: 100 x 50 mm	●	●	●	●	●
		9330 7650 0000 Dimensions: 150 x 50 mm	●	●	●	●	●
				●	●	●	●

# EVoline® Switches and push-buttons

Description	Picture	Order Nr. & Specifications	<i>                     Dock / R-Dock                      Dock Square                      FlipTop Push                      FrameDock                      FrameDock Hide                      Port                      Port Push                      U- &amp; V-Dock                      Up                 </i>
<p><b>ON / OFF switch</b></p> <p>230 V, 2-pole, illuminated in blue. For switching built-in sockets or for external assignment.</p> <p>Installation dimensions: 50 x 50 mm</p>		9330 0010 0000	● ● ● ● ● ● ●
<p><b>ON / OFF "ECOswitch"</b></p> <p>230 V, 2-pole, illuminated in green. With "ECOswitch" symbol For switching built-in sockets or for external assignment.</p> <p>Installation dimensions: 50 x 50 mm</p>		9332 8030 0000	● ● ● ● ● ● ●
<p><b>ON / OFF switch</b></p> <p>230 V, 2-pole, illuminated in blue. With lamp symbol For switching built-in sockets or for external assignment.</p> <p>Installation dimensions: 50 x 50 mm</p>		9330 6650 0000	● ● ● ● ● ● ●
<p><b>ON / OFF switch</b></p> <p>230 V, 2-pole, illuminated in blue. With lamp symbol For switching built-in sockets or for external assignment.</p> <p>Installation dimensions: 50 x 50 mm</p>		9330 6660 0000	● ● ● ● ● ● ●
<p><b>1x Stainless steel pushbutton with blue LED ring</b></p> <p>Pushbutton potential-free Switching data: 240 V ≈ / 3 A LED can be connected separately. LED operating data: 24 V ≈ / 7 mA</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9331 9300 0000 with Screw terminals</p> <p>9331 9240 0000 with 3 m cable and ferrules</p>	● ● ● ● ● ● ● ● ● ● ● ● ● ●

Technical changes and printing errors reserved. | Similar pictures.

Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 FrameDock Hide  
 Port  
 Port Push  
 U- & V-Dock  
 Up

Description	Picture	Order Nr. & Specifications	
-------------	---------	----------------------------	--

**1x Stainless steel pushbutton with blue LED ring, angled outlet**

Pushbutton potential-free  
 Switching data: 240 V = / 3 A  
 LED can be connected separately.  
 LED operating data: 24 V = / 7 mA,  
 labeling field



9331 9320 0000  
 with Screw terminals

9331 9260 0000  
 with 3 m cable and ferrules

Installation dimensions: 50 x 50 mm

**2x Stainless steel pushbutton with blue LED ring, angled outlet**

Pushbutton potential-free  
 Switching data: 240 V = / 3 A  
 LED can be connected separately.  
 LED operating data: 24 V = / 7 mA  
 Angled outlet with labeling field



9331 9330 0000  
 with Screw terminals

9331 9270 0000  
 with 3 m cable and ferrules

Installation dimensions: 50 x 50 mm


**KNX Module, 4x**

voltage supply connection through  
 EIB terminal, 4 x pushbutton,  
 LED illuminated  
 frame: black








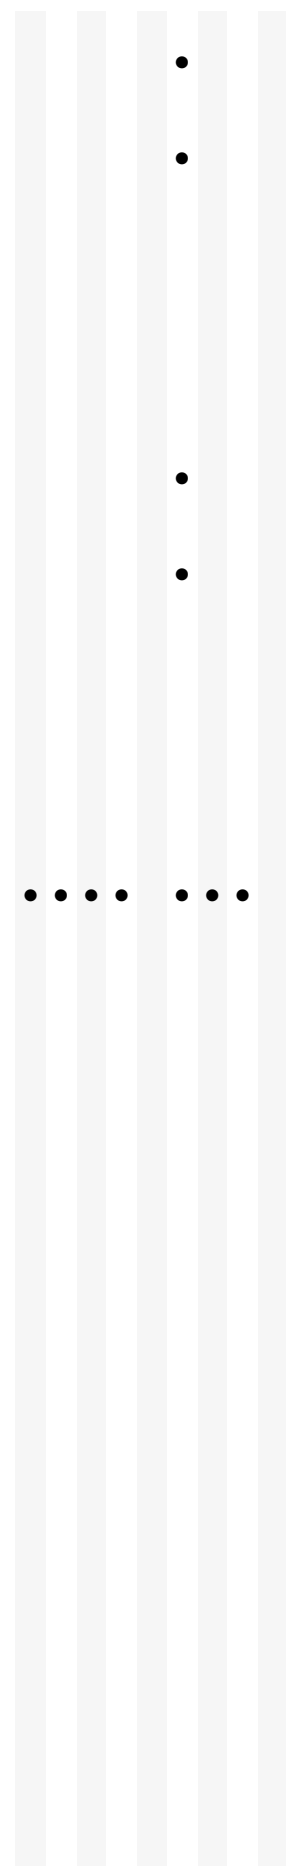

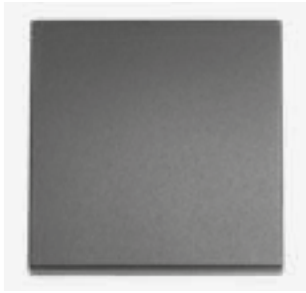


9331 5470 0000

Installation dimensions: 50 x 50 mm








# EVoline® Switches and push-buttons

Description	Picture	Order Nr. & Specifications	<i>/ Dock / R-Dock</i> <i>/ Dock Square</i> <i>/ FlipTop Push</i> <i>/ FrameDock</i> <i>/ FrameDock Hide</i> <i>/ Port</i> <i>/ Port Push</i> <i>/ U- &amp; V-Dock</i> <i>/ Up</i>
<p><b>Two-way switch</b></p> <p>10 AX - 250 V</p> <p>Installation dimensions: 50 × 50mm</p> <p>Colours: Black, White, Aluminium Please specify when ordering.</p>		<p>9332 6260 0000 3 m cable without plug</p>	
<p><b>Two-circle switch</b></p> <p>10 AX - 250 V</p> <p>Installation dimensions: 50 × 50mm</p> <p>Colours: Black, White, Aluminium Please specify when ordering.</p>		<p>9332 6250 0000 3 m cable without plug</p>	
<p><b>Push-button</b></p> <p>10 A - 250 V</p> <p>Installation dimensions: 50 × 50mm</p> <p>Colours: Black, White, Aluminium Please specify when ordering.</p>		<p>9332 6270 0000 3 m cable without plug</p>	
<p><b>Venetian switch</b></p> <p>10 A - 250 V</p> <p>Installation dimensions: 50 × 50mm</p> <p>Colours: Black, White, Aluminium Please specify when ordering.</p>		<p>9332 6290 0000 3 m cable without plug</p>	
<p><b>Venetian push-button</b></p> <p>10 A - 250 V</p> <p>Einbaumaß: 50 × 50mm</p> <p>Colours: Black, White, Aluminium Please specify when ordering.</p>		<p>9332 6280 0000 3 m cable without plug</p>	

Technical changes and printing errors reserved. | Similar pictures.



Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / FrameDock Hide / Port / Port Push / U- & V-Dock / Up /
<b>Residual Current Device</b>		9330 0370 0000 Rated current: 25 A Rated fault current: 30 mA	● ● ● ● ●
RCD/RCCB 2-pole characteristic B, type A		9330 8260 0000 Rated current: 16 A Rated fault current: 10 mA	● ● ● ● ●
Installation dimensions: 100 x 50 mm			
<b>Circuit Breaker MCB</b>		9330 1140 0000 Rated current: 10 A	● ● ● ● ●
2-pole characteristic B		9330 1150 0000 Rated current: 13 A	● ● ● ● ●
Installation dimensions: 100 x 50 mm		9330 0400 0000 Rated current: 16 A	● ● ● ● ●
<b>Overvoltage protector</b>		1599 0910 4000 Powered by GST18	● ● ● ● ● ● ●
Protection level UP L/N PE 1.5KV		1599 0910 4100 WAGO WINSTA	● ● ● ● ● ● ●
<b>Overload Circuit Breaker</b>		9330 5840 0000 Australien 10 A, 250 V	● ● ● ● ● ● ●
required for 3 sockets or more in Australia. 1-pole. Type: Sliding switch			
Installation dimensions: 25 x 50 mm			
<b>Overload Circuit Breaker</b>		9332 1080 0000 Switzerland Fuse: 10 A, 230 V~	● ● ● ● ● ● ●
Switch-on overload switch Installation dimensions: 25 x 50 mm		9332 0380 6600 U.S.A. (from the 4th socket) Fuse: 15 A, 125 V~	● ● ● ● ● ● ●

/ Dock / R-Dock  
 / Dock Square  
 / FlipTop Push  
 / FrameDock  
 / FrameDock Hids  
 / Port  
 / Port Push  
 / U- & V-Dock  
 / Up

Description

Picture


Order Nr. & Specifications

**Power Supply Module  
with Cable and Overload Circuit  
Breaker**

Plug Type: J (T12)  
 Switch-on overload switch (10 A)  
 3 x 1,5 mm<sup>2</sup>  
 e.g. Schweiz



9332 1090 0000  
 Cable length 3 m  
 mounted to product

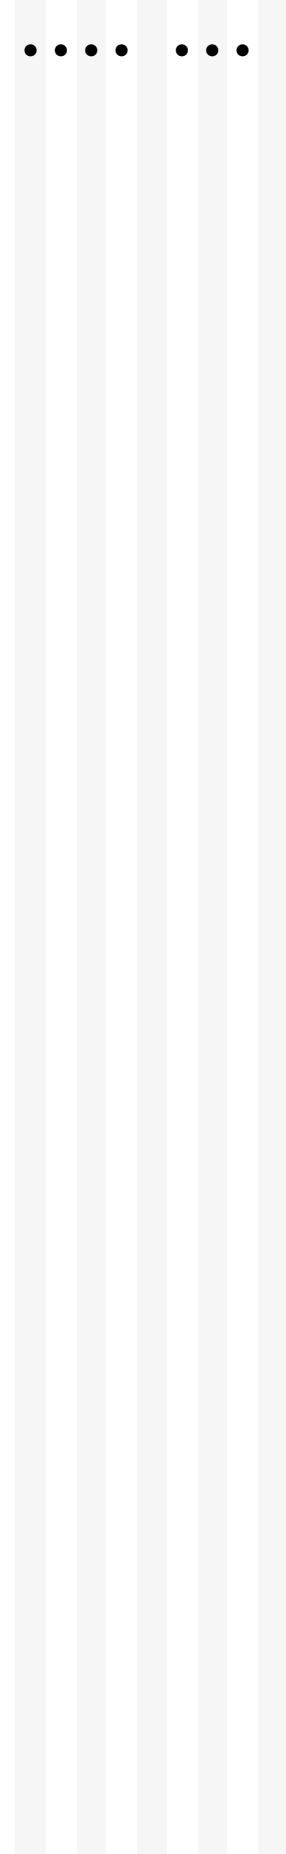

# How to change Interchangeable Modules

Both the FlipTop *Push* and the FrameDock can be individually equipped with data- and multimedia modules.

Should the usage requirements change in the workspace over time, data modules and cable can be replaced without the Port Push, DockSquare, FlipTop *Push* or FrameDock must be removed previously. Of course you can replace the modules between the profiles. \*



Releasing the interchangeable module with simple instruments like screwdrivers. Now another interchangeable module can be mounted to the System  
(this example: FrameDock).



\* Except for Port Push.






# Combination of Interchangeable Modules

Your usage requirements are as flexible as you are.  
So that your workspace keeps tailored to you, you always can equip your system with a new interchangeable module.

Single Modules      Interchangeable Modulee



Examples for the configuration of the interchangeable Modules of FlipTop Push, FrameDock and Dock Square

Description	Picture	Order Nr. & Specifications	
<b>RJ45 Modular Adaptor ELBRO</b>  RJ45 to RJ45, 1:1 interconnected for Patch cable.  1/2 Module		9331 9010 0000 RJ45 CAT6 unshielded socket to socket (RJ45), without cable  9331 8090 0000 RJ45 CAT6 shielded socket to socket (RJ45), without cable  9331 8290 0000 RJ45 CAT6A shielded socket to socket (RJ45), without cable	<div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> </div>
<b>Data Plate with Data Socket Reichle &amp; De-Massari</b>  With Cable  1/2 Module		9331 8420 0000 RJ45 Cat6 shielded with 0,2 m cable and socket  9331 8410 0000 RJ45 Cat6 unshielded with 3m cable and plug  9331 8070 0000 RJ45 Cat6 shielded with 3m cable and plug  9331 8400 0000 RJ45 Cat6A shielded with 3m cable and plug  9332 6130 0000 RJ45 Cat6A shielded with 3m cable and plug	<div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> </div>
<b>Data Plate with Data Socket Reichle &amp; De-Massari</b>  With Cable  1/1 Module		9331 8420 2200 RJ45 Cat6 shielded with 0,2 m cable and socket  9331 8410 2200 RJ45 Cat6 unshielded with 3m cable and plug  9331 8070 2200 RJ45 Cat6 shielded with 3m cable and plug  9331 8400 2200 RJ45 Cat6A shielded with 3m cable and plug	<div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> <div style="width: 20%;"><input type="checkbox"/></div> </div>

FlipTop Push  
 FrameDock  
 FrameDock Hide  
 V-Dock  
 Dock Square  
 Port Push  
 U-Dock

Description

Picture

Order Nr. & Specifications


**VGA-Connector**

15 pole HDD socket  
 with screw connector

1/2 Module



- 9331 8550 0000  
with socket–socket (without cable)
- 9331 8430 0000  
with 0.2 m cable and socket
- 9331 8100 0000  
with 3 m cable and plug




**VGA-Connector**

15 pole HDD socket  
 with screw connector

1/1 Module



- 9331 8550 2200  
with socket–socket (without cable)
- 9331 8430 2200  
with 0.2 m cable and socket
- 9331 8100 2200  
with 3 m cable and plug




**Audio Connector 3,5 mm**

1x Stereo Jack socket 3.5 mm

1/2-Module



- 9331 8220 0020  
with 0.2 m cable and socket
- 9331 8220 0000  
with 3 m cable and socket
- 9331 8210 0000  
3 m cable and plug




**Audio Connector 3,5 mm**

1x Stereo Jack socket 3.5 mm

1/2-Module



- 9331 8220 2220  
with 0.2 m cable and socket
- 9331 8220 2200  
with 3 m cable and socket
- 9331 8210 2200  
with 3 m cable and plug



Description

Picture

Order Nr. & Specifications

**Stainless steel pushbutton with blue LED ring**


Pushbutton potential-free  
 Switching data: 240 VAC/DC, 3 A  
 LED can be connected separately.  
 LED operating data: 24 VAC/DC, 7 mA

1/2 Module



9331 8870 0000  
 with Screw terminals

9331 8850 0000  
 with 3 m cable

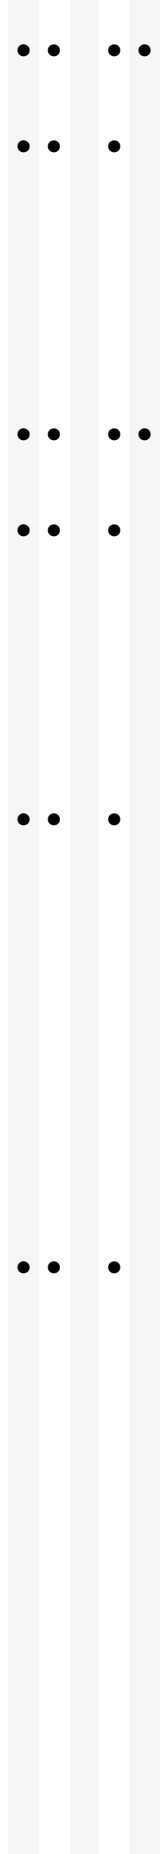

**Stainless steel pushbutton with blue LED ring**


Pushbutton potential-free  
 Switching data: 240 V~/ 3 A  
 LED can be connected separately  
 LED operating data: 24 V~/ 7 mA

1/1 Module



9331 8870 2200  
 with Screw terminals und blauer Ring-LED

9331 8850 2200  
 with 3 m cable

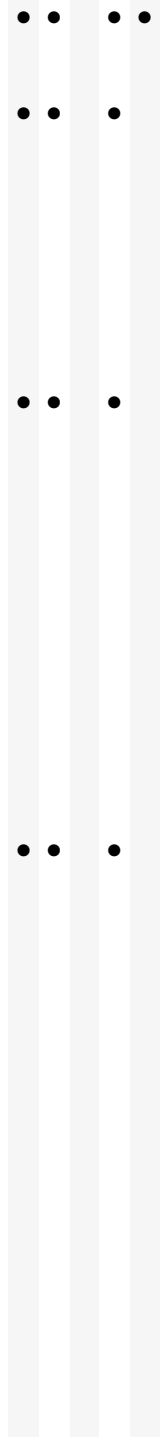

**Audio connector and stainless steel pushbutton with blue LED ring**


1x stereo jack socket 3.5 mm  
 1x pushbutton, potential-free  
 Switching data: 240 V~/ 3 A  
 LED can be connected separately  
 LED operating data: 24 V~/ 7 mA

1/2 module



9331 8880 0000  
 Audio  
 3 m cable

Pushbutton  
 3 m cable

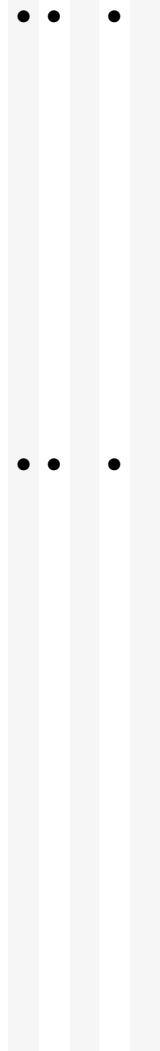

**Audio connector and stainless steel pushbutton with blue LED ring**


1x stereo jack socket 3.5 mm  
 1x pushbutton, potential-free  
 Switching data: 240 V~/ 3 A  
 LED can be connected separately  
 LED operating data: 24 V~/ 7 mA

1/1 module



9331 8880 2200  
 Audio  
 3 m cable

Pushbutton  
 3 m cable

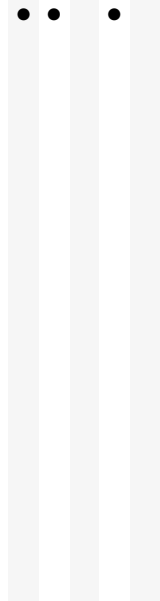

FlipTop Push  
 FrameDock  
 FrameDock Hide  
 V-Dock  
 Dock  
 Dock Square  
 Port Push  
 U-Dock  
 /

Description

Picture

Order Nr. & Specifications

**HDMI-, VGA- and Audioconnector**


HDMI socket with gilded Contacts, 15 pole HDD VGA socket, Stereo Jack socket with cable

1/1 Module



9332 5700 0000  
 HDMI 2.0, VGA, Audio:  
 Each with 3 m cable and plug

9332 6050 0000  
 HDMI 2.0, VGA, Audio:  
 0,2 m cable and socket

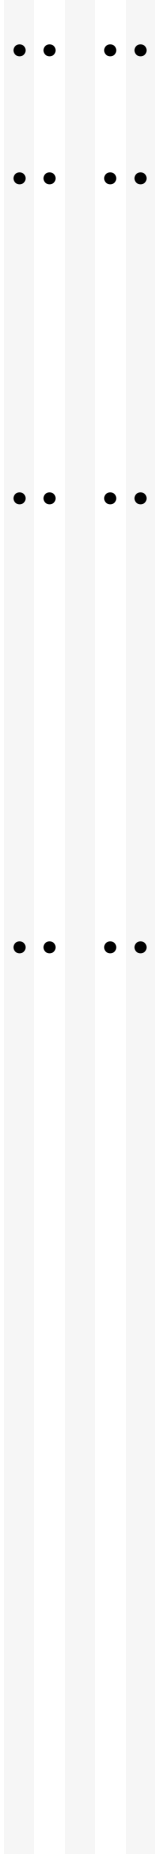

**Audio-Connector 3,5 mm with CAT6-Data socket Reichle & De-Massari**

1 x Stereo Jack socket, 1 x Data socket

1/2-Module




9331 8680 0000  
 Audio:  
 Connector 3,5 mm with 3 m cable and plug

Data  
 RJ45 Cat.6 shielded  
 3 m cable and plug

**Audio-Connector 3,5 mm with CAT6-Data socket Reichle & De-Massari**


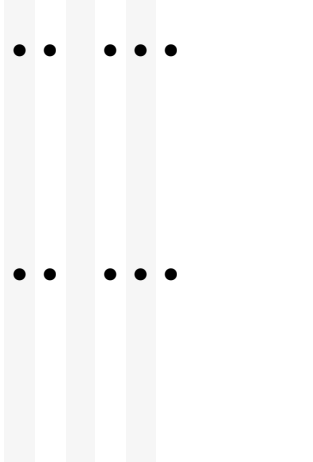

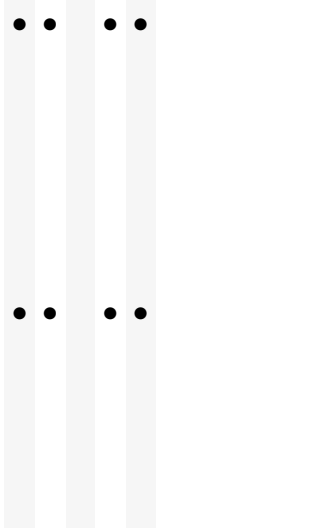

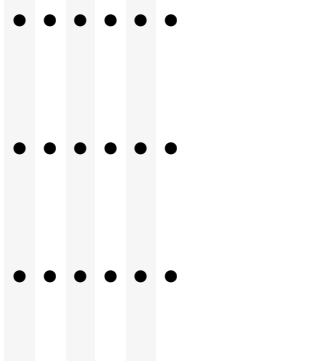

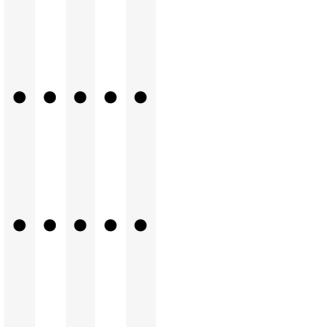
1 x Stereo Jack socket, 1 x Data socket

1/1-Module



9331 8680 2200  
 Audio:  
 Connector 3,5 mm with 3 m cable and plug

Data  
 RJ45 Cat.6 shielded  
 3 m cable and plug

Description	Picture	Order Nr. & Specifications	
<p><b>Audio-Connector 3,5 mm with CAT6-Data socket ELBRO</b></p> <p>1 × Stereo Jack socket 1 × Modular adaptor RJ45 RJ45, 1:1 interconnected for Patch cable</p> <p>1/2 Module</p>		<p>9331 8690 0000 Audio: Connector 3,5 mm with 3 m cable</p> <p>Data socket to socket RJ45 Cat.6 shielded</p> <p>9332 0110 0000 Audio: Connector 3,5 mm without cable</p> <p>Data socket to socket RJ45 Cat.6 shielded</p>	
<p><b>Audio-Connector 3,5 mm with CAT6-Data socket ELBRO</b></p> <p>1 × Stereo Jack socket, 1 × Cat.6 Module adaptor</p> <p>1/1 Module</p>		<p>9331 8690 2200 Audio: Connector 3,5 mm with 3 m cable</p> <p>Data RJ45 Cat.6 shielded socket to socket RJ45</p> <p>9332 0110 2200 Audio: Connector 3,5 mm without cable</p> <p>Data RJ45 Cat.6 shielded socket to socket RJ45</p>	
<p><b>HDMI-Connector</b></p> <p>with gilded contacts</p> <p>1/2 Module</p>		<p>9332 5480 0000 HDMI 2.0 with socket – socket (without cable)</p> <p>9331 9540 0000 HDMI 2.0 with 0.2 m cable and socket</p> <p>9332 2820 0000 HDMI 2.0 with 3 m cable and plug</p>	
<p><b>HDMI-Connector</b></p> <p>with gilded contacts</p> <p>1/1 Module</p>		<p>9331 9540 2200 HDMI 2.0 with 0.2 m cable and socket</p> <p>9332 2820 2200 HDMI 2.0 with 3 m cable and plug</p>	

FlipTop Push  
 FrameDock  
 FrameDock Hide  
 V-Dock  
 Dock Square  
 Port Push  
 U-Dock

Description

Picture

Order Nr. & Specifications


**Display Port-Connector**

DP 1.2 compliant

1/2 Module



9331 8140 0000  
 with 0.4 m cable and socket

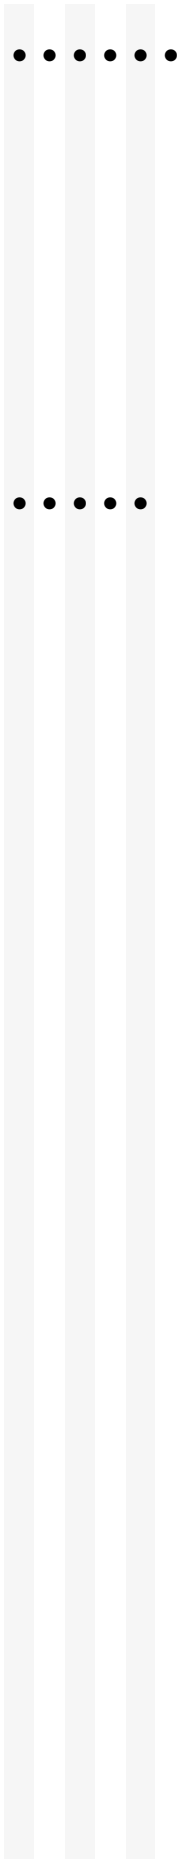




**Display Port-Connector**

DP 1.2 compliant

1/1 Module



9331 8140 2200  
 with 0.4 m cable and socket

Description	Picture	Order Nr. & Specifications	FlipTop Push FrameDock FrameDock V-Dock Dock Square Port Push U-Dock
<b>USB-Connector 3.0</b>		9331 8530 0000 with socket – socket Type A	● ● ● ● ● ●
USB 3.0 Type A		9331 8650 0000 with 0.2 m cable and socket	● ● ● ● ● ●
1/2 Module		9332 5680 0000 with 0,5 m cable and plug	● ● ● ● ● ●
		9331 8460 0000 with 3 m cable and plug	● ● ● ● ● ●
<b>USB-Connector 3.0 Type A</b>		9331 8650 2200 with 0.2 m cable and socket	● ● ● ● ● ●
USB 3.0 Type A		9331 8460 2200 with 3 m cable and plug	● ● ● ● ● ●
1/1 Module			
<b>USB-Connector 3.1 Type C</b>		9332 6370 0000 with 1 m USB cable and plug	● ● ● ● ● ●
USB 3.1 Type C Suitable for power and data supply. 5 A / max. 100 watts up to 10 Gbit / s data			
1/2 module			



FlipTop Push  
 FrameDock  
 FrameDock Hide  
 V-Dock  
 Dock Square  
 Port Push  
 U-Dock

Description

Picture

Order Nr. & Specifications


**Cable Outlet Module**

for one cable like:  
 Patch cable, audio cable etc.

1/1 Module



9331 8230 0000  
 Empty module, without cable

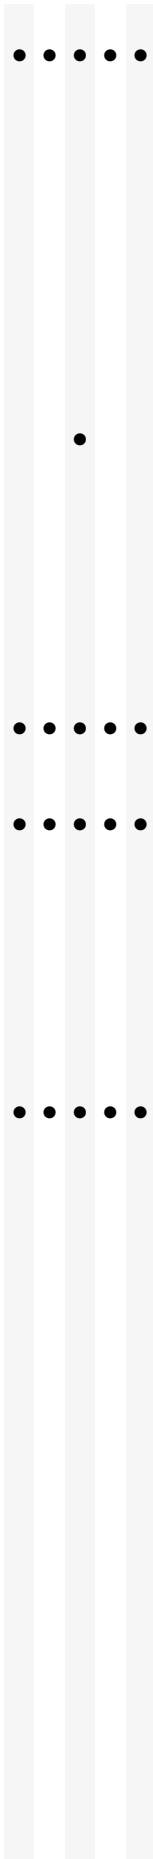


**Cable Outlet Module**

for one cable like:  
 Patch cable, audio cable etc.

1/2 Module



9332 0100 0000  
 Empty module, without cable

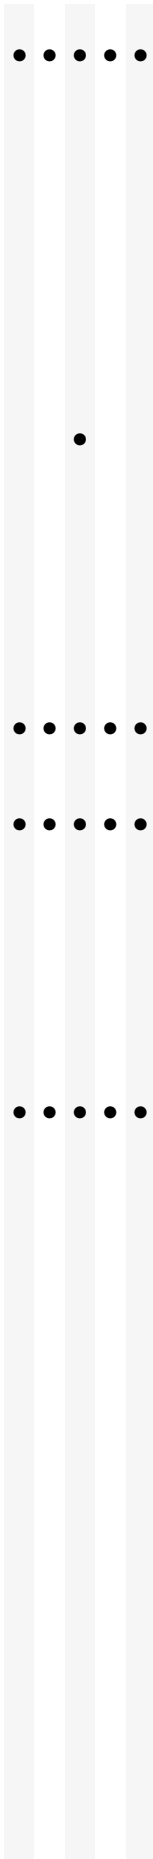


**Cable Outlet Module 5 fold**

for 5 cables;  
 4 passages 10 mm  
 1 passage 20 mm

1/1 Module



9332 5060 0000  
 black  
 9332 5060 0010  
 white

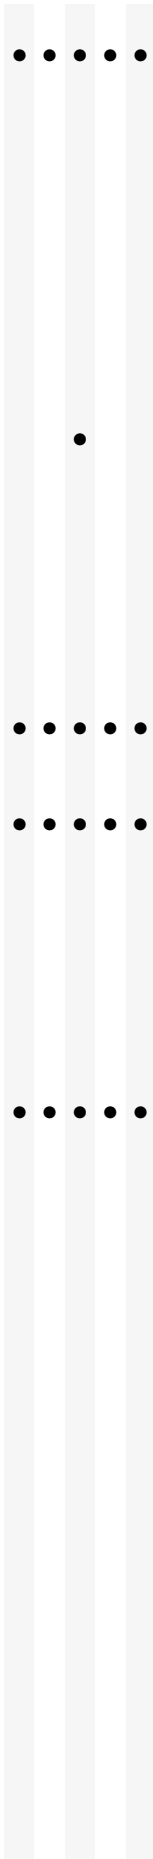


**Installation Space**

Profile to enable later insertation of  
 interchangeable modules

1/1 Module




9331 8300 0000

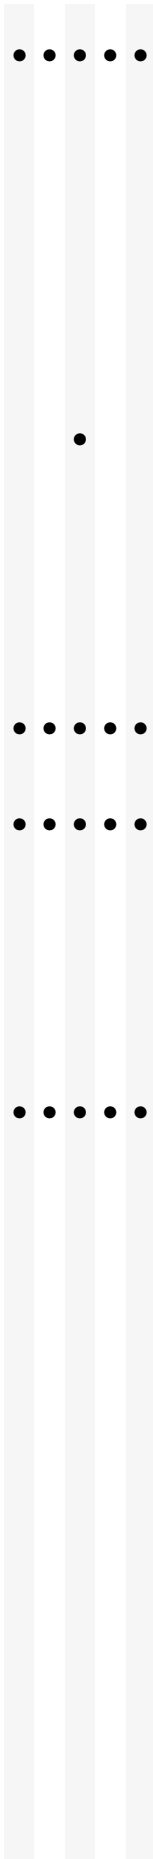


**Installation Space**

Profile to enable later insertation of  
 interchangeable modules

1/2 Module



9332 1410 0000

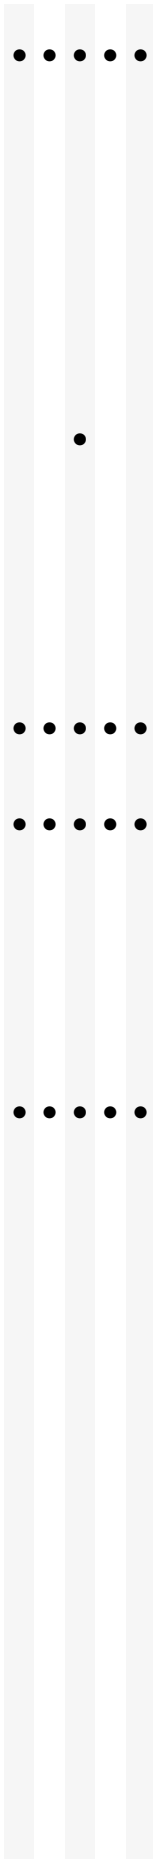

Technical changes and printing errors reserved. | Similar pictures.




# EVoline® SmartDrawers

## EVoline Wing

### This is how drawers are safely electrified


The EVoline Wing is the solution for in-drawer-fitted sockets and charging systems. Wing guides cables behind the drawer to save space without bending or jamming them, ensuring that drawers open and close easily. Added to kitchens or workrooms, wooden or metal rear panels, the fitted solution can be mounted as required so that connections are easily accessible and securely concealed in the storage space.

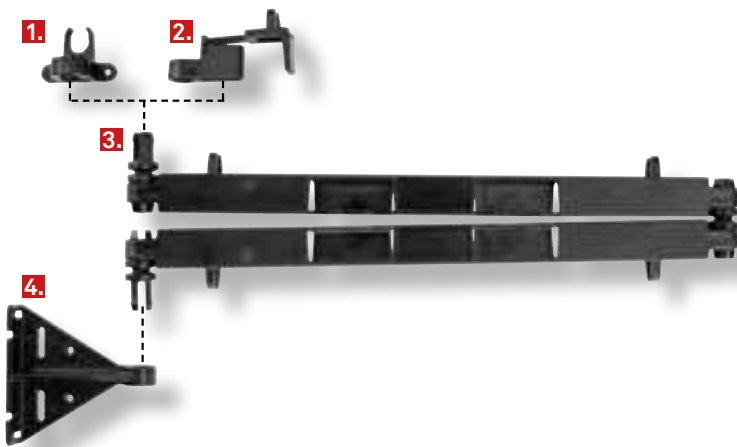

- 1. Cable guide for wooden back panel to be screwed on
- 2. Cable guide for metal back panel for clamping
- 3. Pre-assembled cable guide arm
- 4. Mounting bracket

Patent pending

The EVoline Wing is compatible with a wide range of EVoline systems, according to your wishes or requirements.


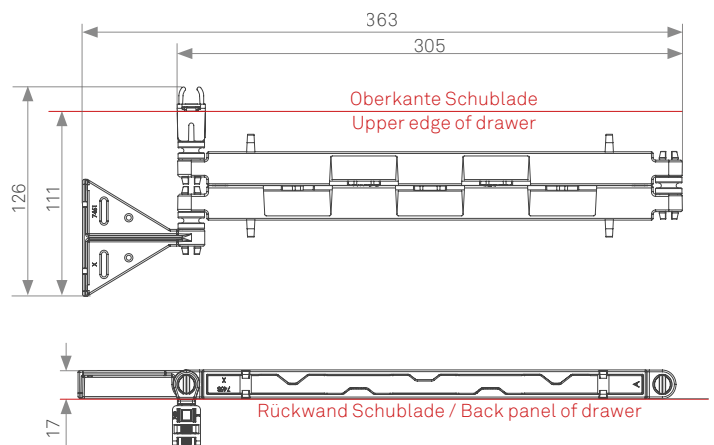







EVOLine PowerOrganiser

### Easy electrification in drawers

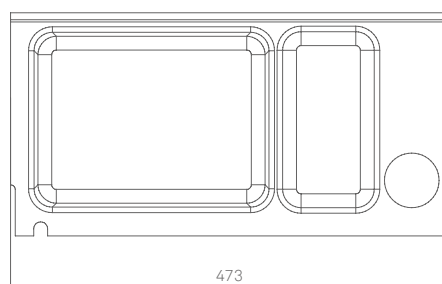With the help of the Wing in conjunction with the new drawer insert, drawers can now be neatly wired and electrified. Wireless-compatible smartphones are stored safely and charged at the same time. The integrated One socket ensures an immaculate work surface and provides the necessary power connection when it is needed.

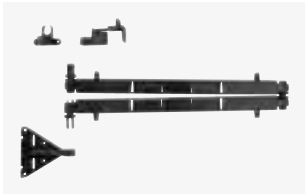

Description	Picture	Specifications	Order Number
<p><b>EVoline Wing</b></p> <p>Cable guide for electrification and pull-out protection of drawers. Also suitable for guiding flexible steel cables, wires, etc. Variable stop options and 2 cable guides for mounting on wooden or metal back panels. Also available as a set with additional R-Dock available.</p>			1599 0912 7800
<p><b>EVoline Wing Set with additional R-Dock</b></p> <p>R-Dock housing made of aluminium, silver anodised. VDE socket(s), 0°, 16 A, with contact protection. USB charger 5 V / 2,1 A. Power supply cable entry in the underside of the profile or through one of the end caps. Fixed supply cable 2.5 m with angle plug, enclosed loose.</p>		<p>R-Dock version: 1x VDE 1x double charger AC</p> <p>R-Dock version: 2x VDE</p> <p>R-Dock version: 2x VDE 1x double charger AC</p>	<p>1598 0001 5400</p> <p>1598 0001 5500</p> <p>1598 0001 5600</p>
<p><b>EVoline PowerOrganiser</b></p> <p>Set for the electrification of drawers.</p> <p>Consisting of:</p> <ul style="list-style-type: none"> <li>- EVoline One, black with VDE socket, 3m cable, VDE plug (enclosed loose) and holder</li> <li>- Drawer insert, anthracite 241x473x56mm</li> <li>- EVoline Wing</li> </ul> <p>Version with wireless charger also includes</p> <ul style="list-style-type: none"> <li>- EVoline DisQ</li> <li>- 20 W plug-in power supply unit with holder</li> <li>- Mains connection module with branch and Euro coupling</li> </ul> <p>Available from 3rd quarter 2024</p>		<p>Version with wireless charger</p> <p>Version without wireless charger</p>	<p>1592 8003 0200</p> <p>1592 8003 0300</p>







# EVoline® CableManagement



## EVoline WireLane

### **Organised cabling**

With the WireLane, all cables run in orderly tracks. The plastic under-the-table channel is screwable, linkable and flexible. Individual links can be connected or disconnected.

## EVoline Bridge

### **Durable Floor Trunking**

The Bridge tidies up the cable routing. The rail is rigid, suitable for rolling over and so flat that no tripping hazard arises. Power and data cables are laid separately in two compartments in their sturdy anodised aluminium housing.



## EVoline Rail

### **Sub-mounted Cable Tray**


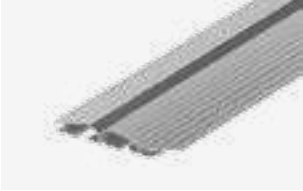
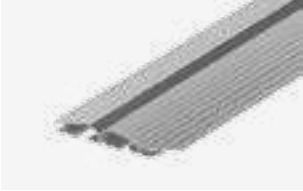
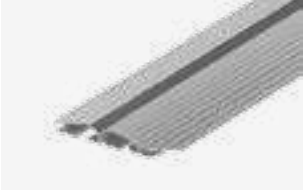
Not all power and data connections need to be accessible on the desktop. In the case of representative tables, even a completely free area is often desired. The rail provides a robust option for mounting single and multiple express sockets or a freely configurable U-dock under the table.

## EVoline CableSleeve








### **Flexible Cable Sleeve**







The Cable Sleeve is a fast and convenient solution for hiding and organising cable mess, thanks to its durable polyester fabric and zip opening. The Cable sleeve can also be held in place with a floor magnet.

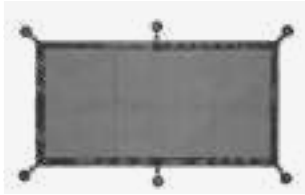



Description	Picture	Specifications	Order Number
<p><b>Bridge Module Arc 90°</b></p> <p>includes 4 Fixing bolt</p>			1593 5090 0600
<p><b>Bridge Module T</b></p> <p>includes 6 Fixing bolts</p>			1593 5090 0500
<p><b>Bridge Module Cross</b></p> <p>includes 8 Fixing bolts</p>			1593 5090 0200
<p><b>Bridge Module Adaptor WireLane</b></p> <p>can also be used as end piece.</p>			1593 5090 0100
<p><b>Bridge Module Vertical</b></p>			1593 5090 0400
<p><b>Bridge Connectors</b></p> <p>2 Pieces</p>			1593 5090 0300



Description	Picture	Specifications	Order Number
<p><b>EVOLine Bridge</b></p> <p>cable cover made of aluminium for screw fixing, with black trim, without screws</p>		<p><b>4 CableClips</b></p> <p>Length 500 mm: Profile silver Profile black</p> <p>Length 800 mm: Profile silver Profile black</p> <p>Length 1.200 mm: Profile silver Profile black</p>	<p>1593 5010 5000 1593 5030 5000  1593 5010 8000 1593 5030 8000  1593 5011 2000 1593 5031 2000</p>
<p><b>EVOLine Bridge</b></p> <p>cable cover made of aluminium With double-sided tape with black trim</p>		<p><b>8 CableClips</b></p> <p>Length 1.600 mm: Profile silver Profile black</p> <p>Length 2.000 mm: Profile silver Profile black</p> <p><b>Special length</b> <b>(available in 50 mm increments, max. length 2.000 mm)</b> Profile silver Profile black</p>	<p>1593 5011 6000 1593 5031 6000  1593 5012 0000 1593 5032 0000  9331 0180 0000 9332 5310 0000</p>
<p><b>EVOLine Bridge</b></p> <p>cable cover made of aluminium With double-sided tape with black trim</p>		<p><b>4 CableClips</b></p> <p>Length 500 mm: Profile silver Profile black</p> <p>Length 800 mm: Profile silver Profile black</p> <p>Length 1.200 mm: Profile silver Profile black</p>	<p>1593 5020 5000 1593 5040 5000  1593 5020 8000 1593 5040 8000  1593 5021 2000 1593 5041 2000</p>
<p><b>EVOLine Bridge</b></p> <p>cable cover made of aluminium With double-sided tape with black trim</p>		<p><b>8 CableClips</b></p> <p>Length 1.600 mm: Profile silver Profile black</p> <p>Length 2.000 mm: Profile silver Profile black</p> <p><b>Special length</b> <b>(available in 50 mm increments, max. length 2.000 mm)</b> Profile silver Profile black</p>	<p>1593 5021 6000 1593 5041 6000  1593 5022 0000 1593 5042 0000  9331 2570 0000 9332 5320 0000</p>

# EVoline® Cable Management

Description	Picture	Specifications	Order Number
<p><b>EVoline WireLane</b></p> <p>under desk cable channel made of plastic. The elements can be linked and separated. Width: 80 mm</p>		<p>Length: 750 – 1000 mm</p> <p>Colour: black Colour: lightgrey</p>	<p>6593 5201 0000 6593 5211 0000</p>
<p><b>EVoline WireLane Strain Relief</b></p> <p>in black plastic with two clamps for cable</p>			6593 5290 0100
<p><b>EVoline WireLane Adapter</b></p> <p>For connecting the U-Dock or Flip TopPush with the WireLane.</p>			9331 8700 0000
<p><b>EVoline WireLane Fixture</b></p> <p>For attaching the WireLane to the Dock or R-Dock.</p>			on request
<p><b>EVoline CableSleeve</b></p> <p>flexible, made of polyester fabric with zipper for bundling cables length: 2 m color: black</p>		<p>Ø 35 mm (stretchable to max. 50 mm)</p> <p>Ø 20 mm (stretchable to max. 30 mm)</p>	<p>1599 0912 5500 1599 0912 6700</p>
<p><b>EVoline Fixing magnet</b></p> <p>Rubberised magnet for fastening theEVoline cable sleeve. incl. cable tie Ø 30 mm</p>			1599 0912 7200
<p><b>EVoline CableNet</b></p> <p>Cable net made of polyester, for under-desk mounting. With 6 round fixers to screw on and velcro cable ties. incl. 6 screws Dimensions: approx. 69 x 34 cm</p>			6599 0913 3600

Description	Picture	Specifications	Order Number
<p><b>EVOLine Rail</b></p> <p>For under desk installation, For EVOLine U-Dock and EVOLine Express. Bespoke profile lengths available upon request.</p>		<p><b>for EVOLine U-Dock</b></p> <p><b>2 black plastic brackets with 2 aluminium profiles</b></p> <p>Profile length 150 mm      1593 5400 0700            Profile length 300 mm      1593 5400 0100            Profile length 500 mm      1593 5400 0200</p>	
		<p><b>3 black plastic brackets with 4 aluminium profiles</b></p> <p>Profile length 2 x 300 mm      1593 5400 0500            Profile length 2 x 400 mm      1593 5400 0600</p>	
		<p><b>For EVOLine Express</b></p> <p><b>2 black plastic brackets with 2 aluminium profiles</b></p> <p>Profile length 165 mm      1593 5400 0300            (for 3-gang)</p> <p>Profile length 215 mm      1593 5400 0400            (for 4-gang)</p>	
		<p><b>Individual</b></p> <p>1 black plastic brackets for EVOLine Express      9331 6230 0000</p>	
		<p>1 black plastic brackets for EVOLine U-Dock      9331 6220 0000</p>	
		<p>1 Pair Aluminium profiles per 100 mm      9331 6210 0000</p>	

Description	Picture	Specifications	Order Number
<p><b>Cable Passage EVoline Port</b></p> <p>Aluminium housing, silver anodised Without modules</p> <p>Mounting hole <math>\varnothing</math> 102 mm</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	1593 1002 5301
		<p>Rocking cover and collar made of black lacquered plastic</p>	1593 1003 2601
		<p>Rocking cover made of solid stainless steel in CD-look, collar made of plastic, painted to match</p>	1593 1003 2701
<p><b>Cable Outlet-Module</b></p> <p>1 cable passage</p> <p>installation dimensions: 50 x 50 mm</p>		<p><math>\varnothing</math> 8 mm</p>	9331 3790 0000
		<p><math>\varnothing</math> 12 mm</p>	9331 0560 0000
		<p><math>\varnothing</math> 17 mm</p>	9331 1670 0000
		<p>Other <math>\varnothing</math> on request</p>	
<p><b>Cable Outlet-Module</b></p> <p>2 cable passages</p> <p>Installation dimensions: 50 x 50 mm</p>		<p><math>\varnothing</math> 8 mm</p>	9331 3800 0000
		<p><math>\varnothing</math> 12 mm</p>	9331 1930 0000
		<p>Other <math>\varnothing</math> on request</p>	
<p><b>Cable Guide-Module</b></p> <p>Clamp for 3 cables</p> <p>2x 8 mm</p> <p>1x 12 mm</p> <p>Colour: black</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>Holder for 3 Cables for mounting in the profile</p>	9331 3600 0000
		<p>Holder for 3 Cables with 2 holes for screwing</p>	1599 0912 8700

Description	Picture	Specifications	Order Number
<p><b>Empty Floor Outlet</b></p> <p>cable passage for installation in double and cavity floors, cover with bracket for EVOLine WireLane.</p> <p>Installation dimensions: Ø 125 mm</p>		<p>black lightgrey</p>	<p>1594 9000 0000 1594 9100 0000</p>
<p><b>Floor Outlet</b> with electrical socket insert</p> <p>VDE-compliant, black, with contact protection, with 3.0 m cable and plug powered by GST18, cover with bracket for EVOLine WireLane</p> <p>Installation dimensions: Ø 125 mm</p>		<p>Cover black Cover lightgrey</p>	<p>1594 9000 0100 1594 9100 0100</p>





# EVoline® Dock Accessories






*EVoline Mounting options*







**Dock Profile fixings**








*The EVoline Dock can be fixed using a number of mounting options suitable for both on and under desk installation.*





*The full selection can be found in our price list and on our home page.*









Description	Picture	Specifications	Order Number
<p><b>Mounting Clamp</b></p> <p>twist-proof including non-slip covering            Colour: black            for profiles:            Dock, U-Dock, R-Dock</p>		<p>Span width 8 – 40 mm</p> <p>Span width 8 – 40 mm, 2×</p> <p>Span width 40 – 75 mm</p> <p>Span width 40 – 75 mm, 2×</p>	<p>1599 0902 1200</p> <p>1599 0902 0500</p> <p>1599 0902 1300</p> <p>1599 0902 1000</p>
<p><b>Mounting Clamp</b></p> <p>twist-proof including non-slip covering            Colour: white            for profiles:            Dock, U-Dock, R-Dock</p>		<p>Span width 8 – 40 mm</p> <p>Span width 8 – 40 mm, 2×</p> <p>Span width 40 – 75 mm</p> <p>Span width 40 – 75 mm, 2×</p>	<p>1599 0909 3300</p> <p>1599 0909 5600</p> <p>1599 0909 3900</p> <p>1599 0909 5700</p>
<p><b>Stainless Steel Mounting Clamp</b></p> <p>twist-proof desk clamp            installed and secured with allen screws.            For profiles:            Dock, U-Dock, R-Dock, V-Dock</p>		<p>Span width 18 – 25 mm</p>	<p>1599 0909 1500</p>
<p><b>Stainless Steel Angle</b></p> <p>for 90° attachment of the U-Dock.            Easy to slide into the profile.            Suitable for on-table and under-table mounting.            2 pcs. per set</p>	 		<p>9332 6140 0000</p>

Description	Picture	Specifications	Order Number
<p><b>Mounting set for under cabinet installation</b></p> <p>consists of two EVOLine Dock brackets with wood screws screw: 3.5 x 15 mm</p>			1599 0903 8300
<p><b>Mounting set for desk installation</b></p> <p>consists of two EVOLine Dock brackets with wing nut screws screw: M4 x 40 mm</p>			1599 0903 8200
<p><b>Stainless Steel Pillar</b></p> <p>Steel pillar for EVOLine Docks consisting of: stainless steel sleeve, screw, nut, washer and rubber seal for profiles: Dock, R-Dock, U-Dock</p>		<p>Material : Stainless steel for surface thickness up to 50 mm</p>	1599 0906 0700
<p><b>Angle Profile</b></p> <p>for fixing of EVOLine V-Dock</p>		<p>Length: 100 mm Length: 60 mm</p>	<p>1599 0908 4400 1599 0909 6400</p>
<p><b>EVOLine Mounting clamps</b></p> <p>2 pieces, black, for fastening the Dock Square. For an optimal clamping effect, the clamps are simply pushed completely into the base.</p>		<p>with knurled screws Clamping range: 12 - 28 mm  with hexagon sockets Clamping range: 17 - 28 mm</p>	<p>1599 0912 0200  1599 0912 0400</p>
<p><b>EVOLine Magnetic attachment</b></p> <p>Suitable for U-Dock and V-Dock. To be pushed into the fastening groove on the underside of the profile.</p> <p>Magnet dimensions: 43 x 32 mm</p>			1599 0913 1100

Description	Picture	Specifications	Order Number
<p><b>EVoline Quicklock Pro</b></p> <p>fixing system with a concealed cable channel and 2 fasteners, for surface thickness of 18 to 32 mm, installation without tools, fasteners with protective underlay for profiles: EVoline Dock, EVoline R-Dock</p>		<p>Length: 100 mm without bracket</p> <p>length: 150 mm includes bracket for Wire-Lane connection</p> <p>length: 200 mm includes bracket for EVoline WireLane connection</p>	<p>1599 0910 8500</p> <p>1599 0910 8300</p> <p>1599 0910 8400</p>
<p><b>Mounted on product</b></p>		<p>profile min. length: 100 mm price unit: 100 mm</p>	<p>9331 6700 0000</p>
		<p>Fastening element</p>	<p>9332 0300 0000</p>
		<p>WireLane bracket usable from 150 mm profile length</p>	<p>9331 6720 0000</p>
<p><b>Double Sided Strip for EVoline Dock Square</b></p> <p>2x Double Sided Strips Removable without residue.</p>			<p>9332 1050 0000</p>
<p><b>EVoline Rubber gasket</b></p> <p>fits under the collar of the EVoline Port.</p>			<p>1599 0903 9100</p>

Description	Picture	Specifications	Order Number
<p><b>EVoline Laptop Secure</b></p> <p>Sturdy mounting lug for commercial laptop anti-theft devices. Such as Kensington Lock.</p>		<p>Die-cast, silver-colored Length: 41 mm Breite: 9 mm Höhe: 22 mm</p>	9331 3140 0000
<p><b>EVoline Laptop Secure</b></p> <p>Sturdy attachment loop for standard laptop theft protection Such as Kensington Lock.</p>		Silver-colored	9331 6030 0000
<p><b>EVoline Hole Saw</b></p> <p>For precise installation.</p>		<p>Mounting hole Ø 102 mm (for EVoline Port)</p> <p>Mounting hole Ø 83 mm (for EVoline Square80)</p> <p>Mounting hole Ø 54 mm (for EVoline One)</p>	<p>1599 0901 7000</p> <p>1599 0910 1000</p> <p>1599 0911 3900</p>
<p><b>EVoline Unlocking Tool for interchangeable modules</b></p>			6599 0911 1300

Description	Picture	Specifications	Order Number
<p><b>EVoline sample display</b></p> <p>Fully functional; equipped with EVoline Backflip, Circle80 with Circle80 DisQ, Circle80 Access, FlipTop Push S, FrameDock with FrameDock Hide, One, Square80, power supply unit and installation connector with Euro coupling; without connection cable; with carrying bag made of robust truck tarp incl. shoulder strap;</p>		<p>International sockets</p> <p>Bag separate, without display.</p> <p>Felt insert for bag, for carrying smaller displays or products.</p>	<p>7599 0911 6100</p> <p>7599 0911 6900</p> <p>7599 0911 8100</p>
<p><b>EVoline sample display One</b></p> <p>Sample display for installation demonstration.</p> <p>With 3 EVoline One sockets: surface-mounted, flush-mounted, with cover.</p>		<p>VDE</p> <p>UK</p> <p>B/F</p> <p>CH 10 A</p>	<p>7599 0911 6300</p> <p>7599 0911 6400</p> <p>7599 0911 6500</p> <p>7599 0911 6600</p>
<p><b>EVoline sample display OneDisQ</b></p>			<p>7599 0913 3700</p>
<p><b>EVoline sample display One Upholstery installation</b></p> <p>Sample display for installation demonstration of the EVoline One in an upholstered piece of furniture.</p>		<p>Flat upholstery</p> <p>High upholstery</p>	<p>7599 0911 7900</p> <p>7599 0911 8000</p>

Description	Picture	Specifications	Order Number
<p><b>EVoline sample display Backflip</b></p> <p>Sample display for the surface-mounted and flush-fitting demonstration of the backflip and the plug cabling on the back. Can be set up, fits in a felt insert and sample bag.</p>		<p>VDE</p> <p>B/F</p> <p>CH-10 A</p> <p>UK</p>	<p>7599 0912 2400</p> <p>7599 0912 2500</p> <p>7599 0912 2600</p> <p>7599 0912 2700</p>
<p><b>EVoline felt underlay</b></p> <p>Made of polyester felt. Dimensions: 80 x 55 cm</p>			<p>WM65 9909 1319</p>

# EVOLine®

## Schulte - Elektrotechnik GmbH & Co. KG

Jüngerstraße 21  
D-58515 Lüdenscheid

Telefon | *phone* +49 23 51 / 94 81-0  
Telefax | *fax* +49 23 51 / 4 26 58

E-Mail | *mail* info@schulte.com

Deutsch      *english*



[www.evoline.com](http://www.evoline.com)

Issued: 07/2024

Subject to technical changes and printing errors | Illustrations similar.