



for your electronic home

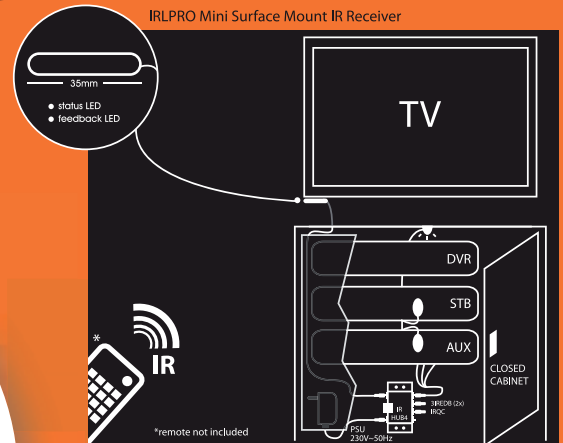

entertainment

eIR<sup>2</sup>x™

wide band 30-60 kHz incl NEC, RC5/6, RCMM, XMP, etc.

PLUG'n'PLAY

Colour coded jacks for easy connection.

IRLPRO Mini Surface Mount Receiver (35x10x10mm), including double-sided stick pad

IRHUB4 Connecting Hub

2x 3IREDB Triple Blinking IR Emitters, for control of up to 6 devices in total

Extra Adhesive Tabs for Emitters

1IRQC IR Quick Connect Cable

230V ~ 50Hz to 12VDC Mains Power Supply Adapter

Instruction Manual

OPTIONAL Expansion Possibilities:  
- 3IREDB Triple Blinking IR Emitters for additional control of 3 devices  
- extra IR Receiver for additional room, to be selected from ebode IR Link Pro Modular Series

More from ebode



TAKE10 IR+RF LightSpeaker™  
www.ebodeelectronics.eu

### eIR<sup>2</sup>x™

Our ebode proprietary eIR<sup>2</sup>x™ (pronounce Irex) Technology guarantees a high level of immunity for infrared noise from direct sunlight, CFL lighting and Flat Panel TV's (including Plasma, LCD and LED). This kit contains two 3IREDB for control of 6 devices, and a 1IRQC Quick Connect cable for direct control of popular audio/video Receivers (e.g. Yamaha, Onkyo, Denon, Marantz, NAD, Harman-Kardon, Pioneer, etc). The IR Link Pro Mini runs on a 12VDC mains adapter (included) and is expandable with extra IR Link Receivers in different rooms.



The ebode IR Link Pro Mini is a mains powered InfraRed Extender System that allows full remote control operation of audio/video components (such as your Blu-ray Player, A/V Receiver, DVR, Satellite Box, Cable Tuner, etc.) which are located behind closed cabinet doors, in other rooms, or other concealed and/or out-of-sight locations.



Mit dem IR Link Pro Mini können Sie die InfraRot Signale von Ihrer eigenen Fernbedienung verlängern. IR Link Pro Mini macht es möglich, Ihre Audio/Video Geräte zu bedienen, auch wenn diese in einem anderen Raum oder in einem abgeschlossenen Schrank untergebracht sind oder außer Reichweite stehen.



Met de IR Link Pro Mini kunt u de InfraRood signalen van uw eigen afstandsbediening verlengen. IR Link Pro Mini maakt het mogelijk om uw A/V apparatuur te bedienen terwijl deze in een andere ruimte of gesloten kast staat of verdekt is opgesteld.



IR Link Pro Mini är ett InfraRött förlängningssystem som tillåter fjärrstyrning av AV-utrustning, och som är t ex lokaliserade bakom stängda dörrar i andra rum, eller andra områden som är utom synhåll.



Le IR Link Pro Mini est un système d'extension InfraRouge qui permet de contrôler à distance des équipements A/V situés dans d'autres chambres, derrière un placard fermé, cachés ou tout simplement hors de portée.



El IR Link Pro Mini permite pleno control remoto por Infrarrojos sobre diferentes equipos de A / V situados ocultos tras muebles con puertas cerradas, en otras habitaciones, o en otros lugares cerrados o fuera del alcance de la vista.



O IR Link Pro Mini é um sistema extensor de Infravermelhos que permite o controlo remoto de equipamentos A/V que situem dentro de armários, em locais escondidos ou fora de vista.



IR Link Pro Mini è un Sistema di Ripetizione a InfraRossi che consente di utilizzare il Telecomando a InfraRossi per comandare apparecchiature multimediali Audio/Video poste all'interno di cabinet chiusi, in altri ambienti e/o in altre postazioni non in vista.

Available Plug Types: Australian, European (Schuko) and UK plug types

WITH STATUS AND  
FEEDBACK LED

Name	PowerMid Classic	PowerMid Premium	IR Link B Battery	IR Link P Power Supply	IR Link C Coax	IR Link M Mini	IR Link Pro Table Top	IR Link Pro Mini	IR Link Pro Flush	CI IR Link Pro Modular
Model Code E = Euro plug, U = UK plug, A = Australian plug	PM10C E/U	PM28 E/U	IRLBK	IRLPK E/U/A	IRLCK E/U/A	IRLMM E/U/A	IRLPRK E/U/A	IRLPRMK E/U/A	IRLPRFK E/U/A	IRLPPROCI
Technology	IRRF 433 MHz	IRRF 433 MHz	eIR2X™	eIR2X™	eIR2X™	eIR2X™	eIR2X™	eIR2X™	eIR2X™	eIR2X™
APPLICATIONS										
Dimensions of Receiver in mm - IR Link series features smallest foot-prints in the market	75x75x115	55 x 40 x 25	55 x 40 x 25	55 x 40 x 25	55 x 40 x 25	35 x 10 x 10	55 x 40 x 25	35 x 10 x 10	50 x Ø 16	55 x 40 x 25
Operate the A/V Equipment with your original remote control via	WIRELESS TABLE TOP RECEIVER	WIRELESS TABLE TOP RECEIVER	WIRED SINGLE ROOM TABLE TOP RECEIVER	WIRED SINGLE ROOM TABLE TOP RECEIVER	WIRED MULTIROOM TABLE TOP SURFACE MINI OR FLUSH MOUNT RECEIVER	WIRED SINGLE ROOM TABLE TOP RECEIVER	WIRED MULTIROOM TABLE TOP SURFACE MINI OR FLUSH MOUNT RECEIVER	WIRED MULTIROOM TABLE TOP SURFACE MINI OR FLUSH MOUNT RECEIVER	WIRED MULTIROOM TABLE TOP SURFACE MINI OR FLUSH MOUNT RECEIVER	MODULAR RECEIVER
Max. distance between A/V equipment and remote room	30 meters indoor***	30 meters indoor***	3 meters	3 meters	300 meters	3 meters	300 meters	300 meters	300 meters	
Select the number of A/V devices to be operated with IR Link Extender Kit	unlimited in range of blaster	unlimited in range of blaster	3	3	3	2	4 (3IRED + 1IR QC*)	7 (2x3IRED + 1IR QC*)	7 (2x3IRED + 1IR QC*)	
Select max. number of A/V devices controlled with optional IRED Emitters	3IREDB RP	3IREDB RP	3	6	3	5	6	12	12	
Control your A/V equipment via dedicated IR input jack. See O/M of your device.							✓	✓	✓	
<b>FEATURES</b>										
Signal transmission infrastructure	✓	✓	✓	✓	✓	✓	✓	✓	✓	
• Wireless RF (433 MHz)										
• Via IR extender cable attached										
• Via coaxial cable (CATV/CAI)										
• With category cable or similar (CAT5/UTP)										
Colour to integrate in environment	black	black	black	black	black	black	black	black	black/chrome white/brass	
Optional custom (receiver) expansion										
Works with original remote control	✓	✓	✓	✓	✓	✓	✓	✓	✓	
IR carrier frequency range	38 + 56 kHz	30 - 60kHz	30 - 60kHz	30 - 60kHz	30 - 60kHz	30 - 60kHz	30 - 60kHz	30 - 60kHz	30 - 60kHz	30 - 60kHz
RCMM / XMP compatible (latest IR protocols)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
eIR2X** immunity for interference	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Feedback LED in Receiver							✓	✓	✓	✓
Power Status LED Ext. Device Feature			✓							
Battery powered										
230V~50Hz to 12VDC mains power adapter (EuPII)	✓ (PM10C)	✓		✓	✓	✓	✓	✓	✓	✓

FOR THE CERTIFIED DEALER/INSTALLER:  
EBODE IRLINK MODULAR SERIES  
VISIT [WWW.EBODEELECTRONICS.EU](http://WWW.EBODEELECTRONICS.EU)

\*IR QC = InfraRed Quick Connect Cable for direct control of popular Audio/Video Receivers (e.g. Yamaha, Onkyo, Denon, Marantz, NAD, Harman Kardon, Pioneer, Sony etc).  
 \*\* Our eode proprietary eIR2X (pronounce Irex) Technology guarantees a high level of immunity for InfraRed noise from direct sunlight, CFL lighting and Flat Panel TV's (incl Plasma, LCD and LED).  
 \*\*\* depending on environmental conditions