

Datasheet
2024-10-10



Product Type **s24 m**
Product Name **sCharge 12W microUSB**
GTIN / EAN 4260258612240
MPN sCh-12W-mUSB-1.0
Market Entry March 2019

Description Very compact in-wall USB power supply for wall mounted Lightning devices.
Direct connection with a USB-A to USB-micro cable.
Nominal input: 100-250V~, ±10%, 50 -60Hz,
Nominal output: 5V=, +5%/-5%, 2400mA

Compatibility to all devices with a USB micro connector.
Fits in European or British standard gang boxes with a minimal depth of 42mm.
Please check our website for more information.

Certifications **KEMA (EUR), CE :**
RoHS Directive (2011/65/EU) CE
EMC Directive (2014/30/EU)
Low Voltage Directive (2014/35/EU) ErP Directive (2009/125/EC)
This product is in compliance with the following standards: EN 60950-1 (Incl. AU, CN, UK deviations)
EN 60065, EN 62368-1, EN 55032 (class-B), EN 55024
EN 60669-2-1 (clause 26)

Content

- sCharge 12W with micro USB cable, 30 cm
- User manual /instruction sheet in EU languages, turkish, russian, chinese

Material/ Ecology Metal mounting frame, plastic housing.
Packaging RoHS compliant, WEEE registration: DE 64398562
Packaging completely made of cardboard



Measures/ Weight Box 80 x 80 x 50 mm (HxWxD), 80 g (sCharge only)
Product 71 x 71 x 33 mm with metal frame, 120 g (incl. cable and packaging)



HS Code 8504 4083
Country of Origin China



Mandatory information according to the General Product Safety Regulation (GSPR):
Note! Installation only by persons with relevant electrical knowledge and experience!

Improper installation puts your own life and the lives of the users of the electrical system at risk. Improper installation may result in serious damage to property, e.g. due to fire. You may be personally liable for personal injury and damage to property. Contact an electrician!

Datenblatt
2024-10-10

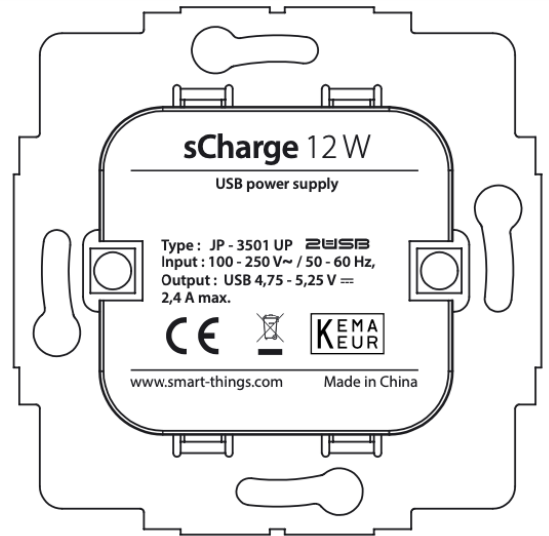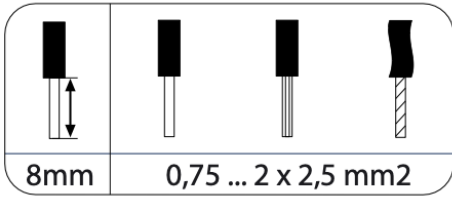

⊕ N L 100 - 250 V ~

